






WCR2 CPP Tx Power Monitor, Profile Time Interval, HotLoad/WarmLoad Ratios

UTC: 17:36:59-18:24:51, Dur: 2872.32s
 TimeCor: 0.00s, TimeFlg: 1, TFPstatus constant
 TimeInt/PPS(min,max,mn,std): 50.0,50.0,50.0,0.0 ms / 20,20,20
 NumRec(r/t): 11833/57433, 45600-57432/18:15:00-18:24:51
 AcqTime: 50.0ms, Rate: 113KB/s, Averages: 250
 Pulse: 200ns, IFF: 5.0MHz, Tx: V2 V2 H2 H2
 PRF: 20.0 20.0 20.0 KHz, IGS: 50us
 Range(min,max,rqs): 105,3108,15.0 m, Gates: 201, Aspect: 3.3
 Mirror(-9|0|1|2,3,9x = no mirror|sidelup|error): 1

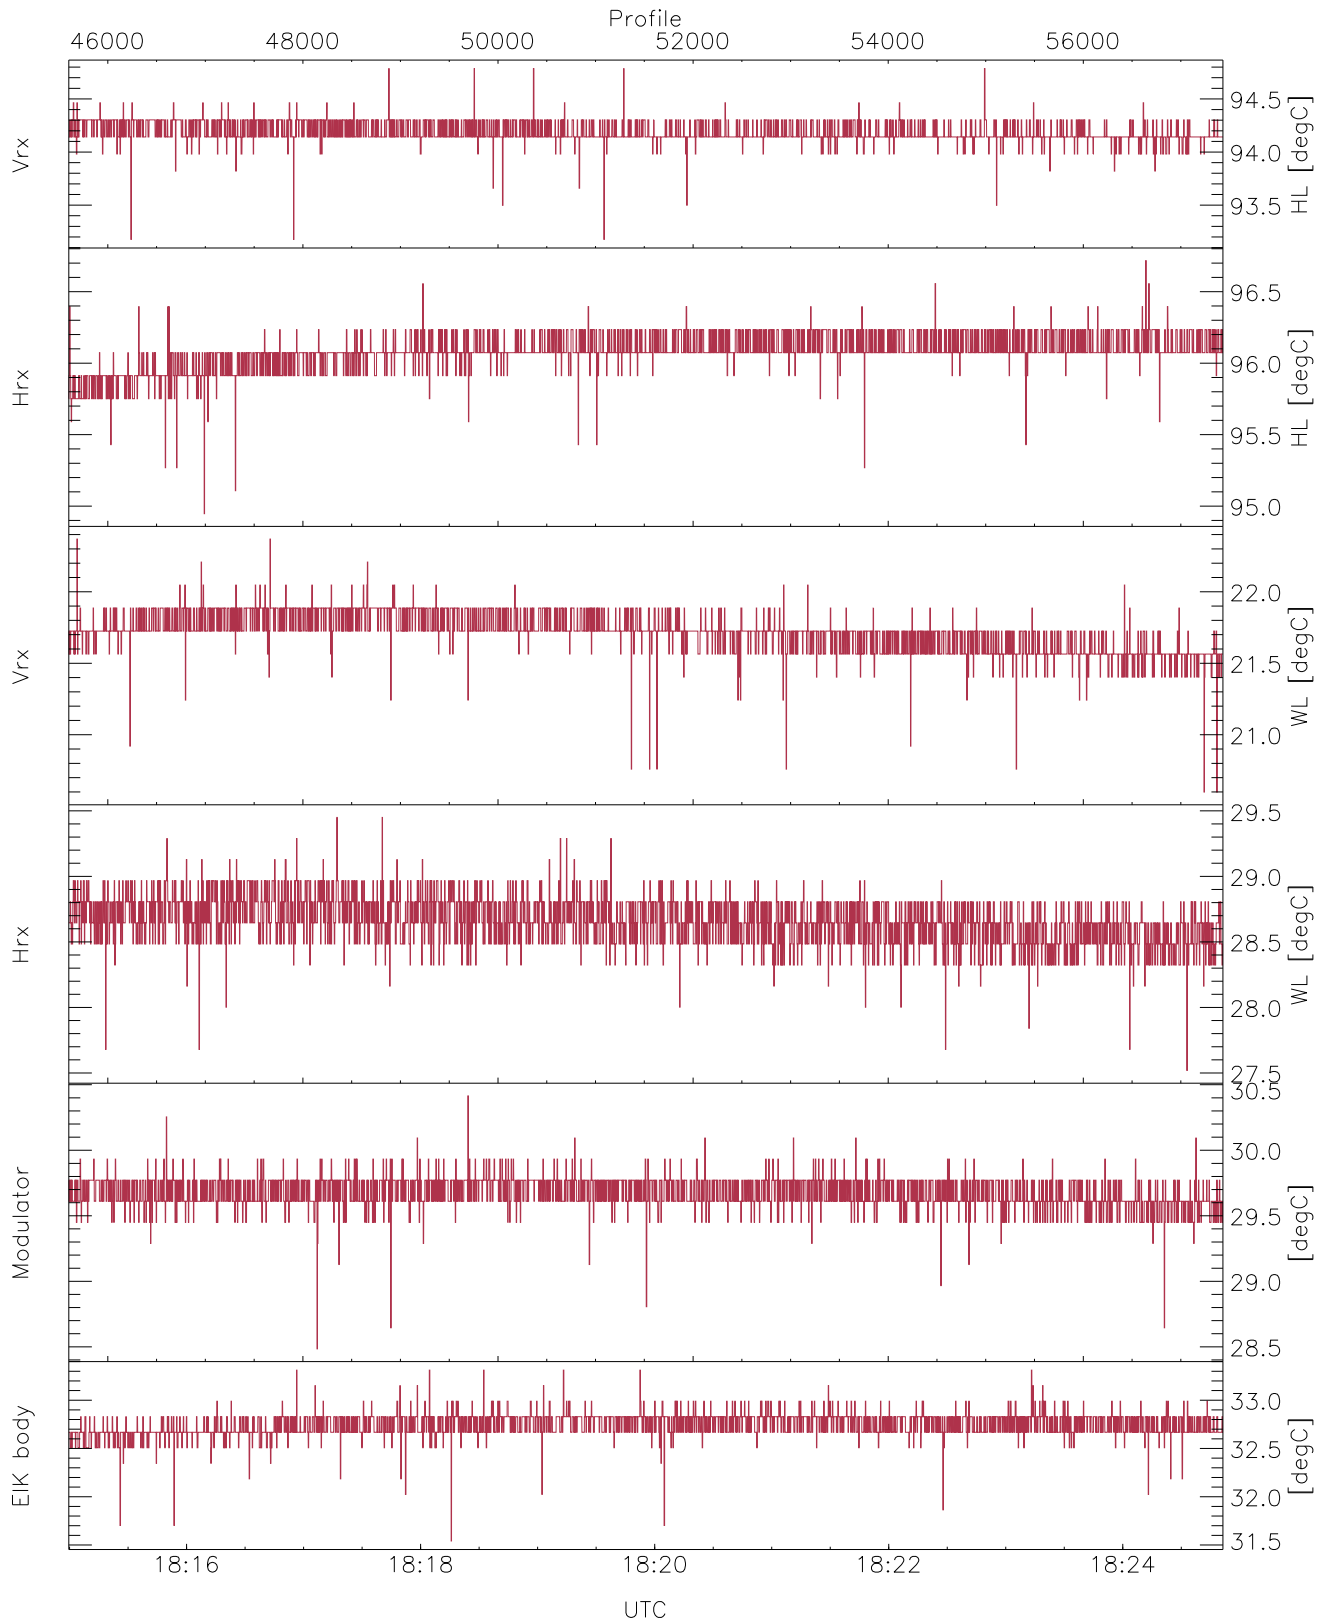


WCR2 CPP Temperature Monitor: Hot Loads, Warm Loads, Modulator, and EIK

mintempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 93,94,20,27,28,31
maxtempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 94,96,22,29,30,33
LOalarm(20,80,240,2.8,14.8 MHz): None
EIK Faults(# prof affected):
DeckT,CollT,BodyCurr,DeckF,OverDuty,HVPS (6,6,6,6,10)

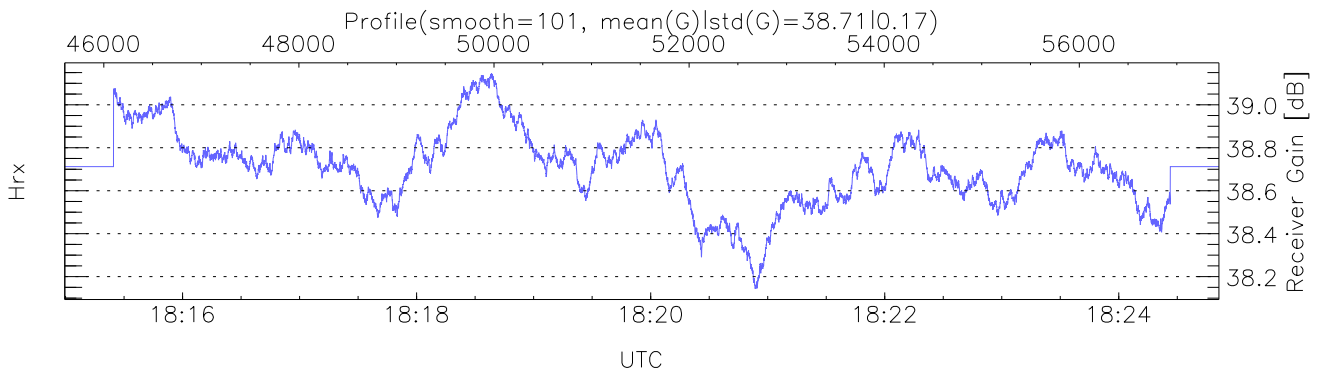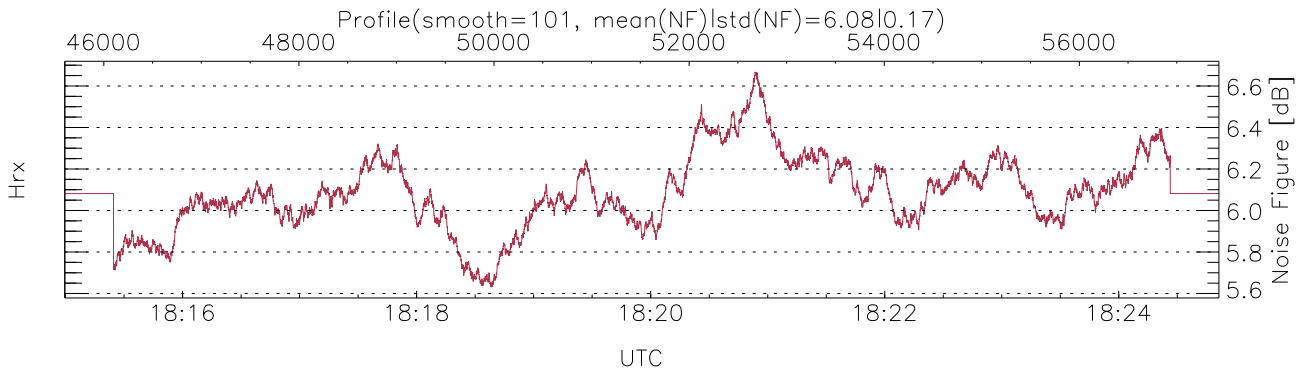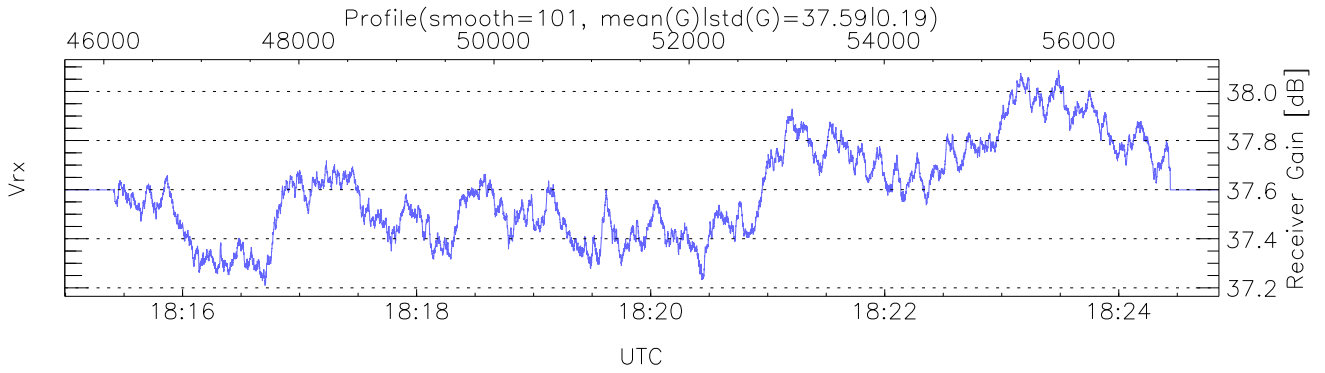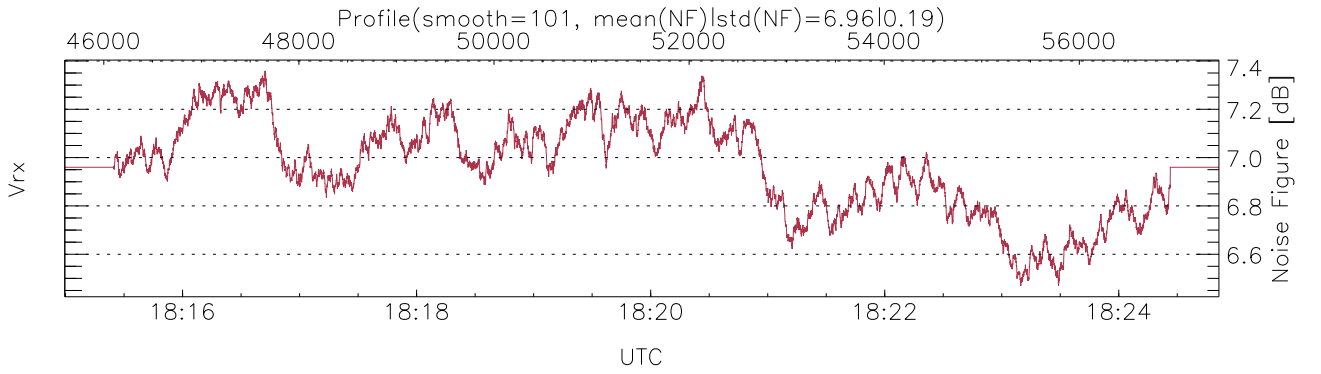


WCR2 CPP Receivers Gain and Noise Figure

Rx Saturation: 153 pixs, 19 gates, 153 profs, 1 prods

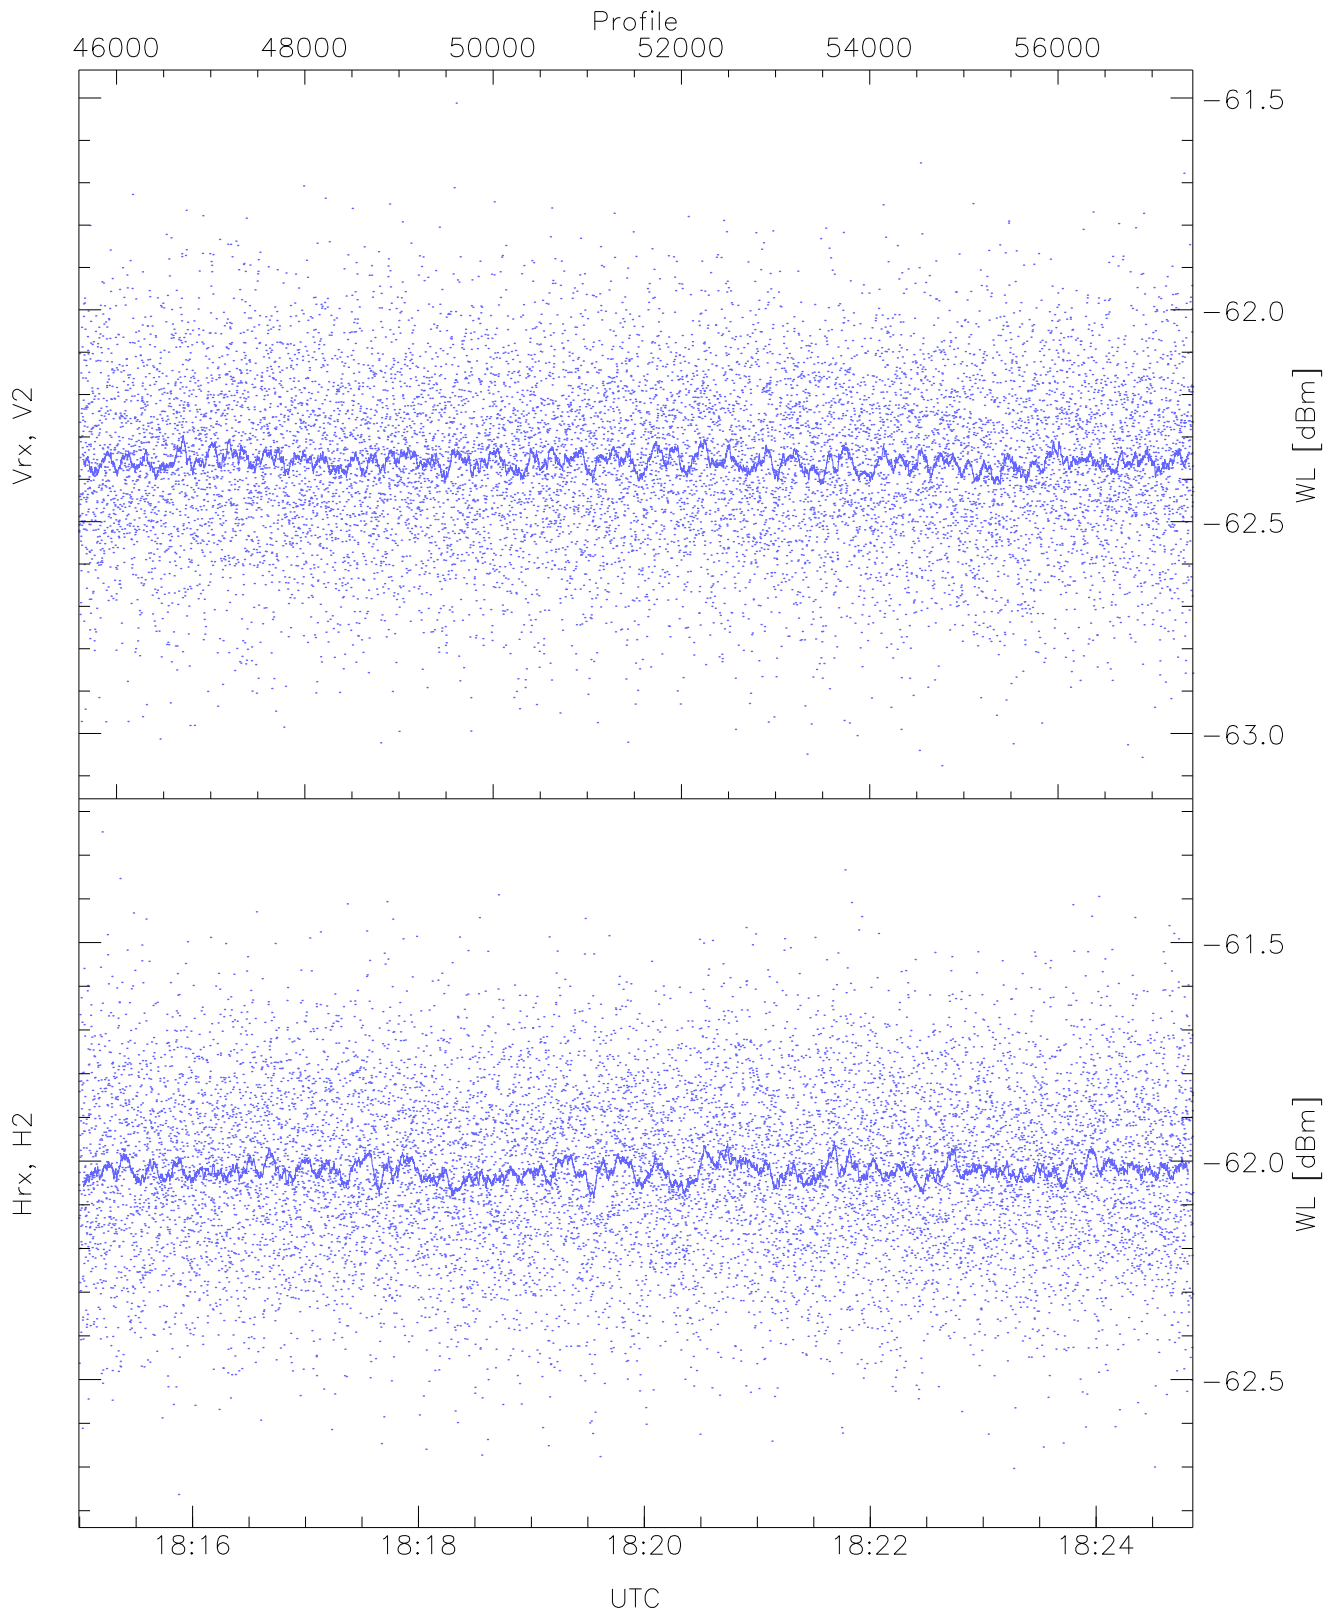


WCR2 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Vrx, V2(WL [dBm])	-63.08	-61.51	-62.36	-62.36	-75.73
Hrx, H2(WL [dBm])	-62.76	-61.25	-62.02	-62.02	-75.49

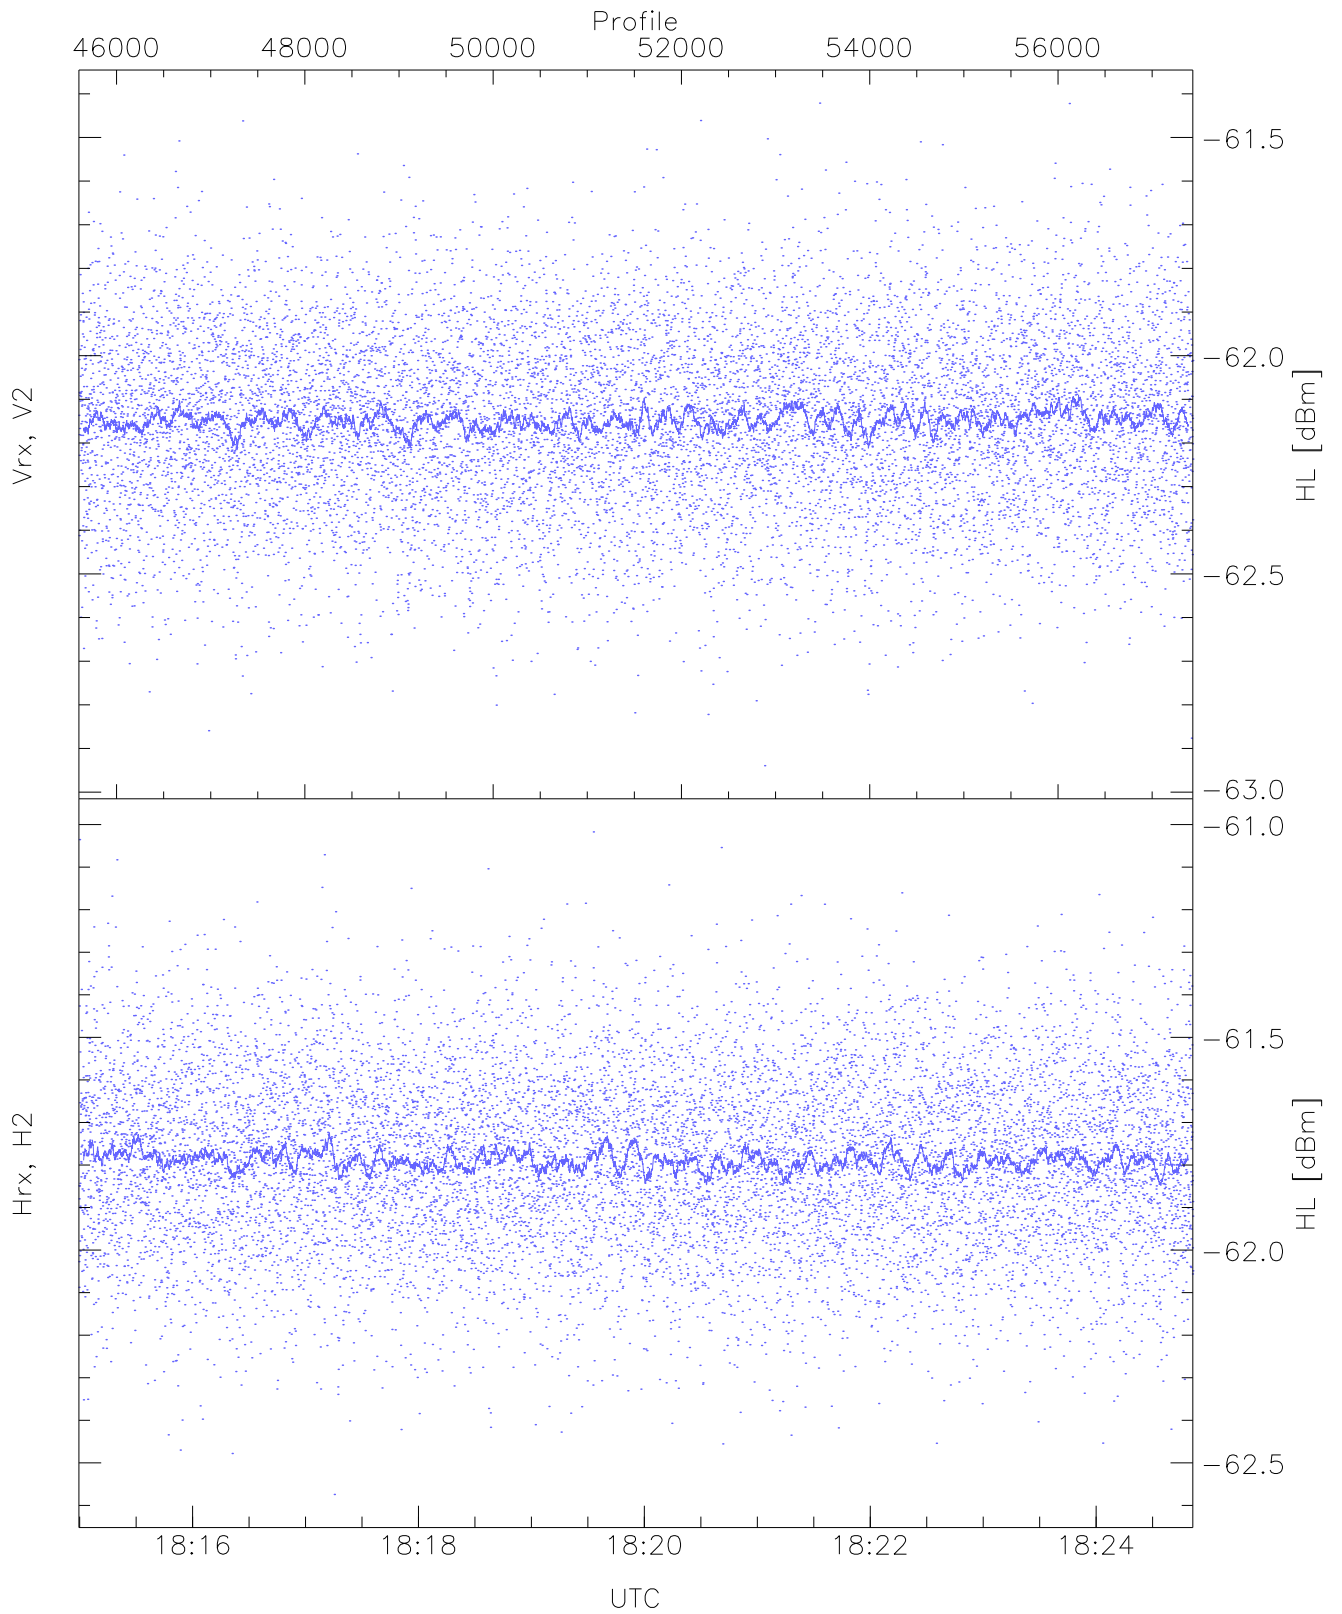


WCR2 CPP Receivers Noise Power from the Hot Loads Measurements

	Min	Max	Mean	Median	StDev
Vrx, V2(HL [dBm])	-62.94	-61.42	-62.15	-62.15	-75.59
Hrx, H2(HL [dBm])	-62.57	-61.02	-61.79	-61.79	-75.21

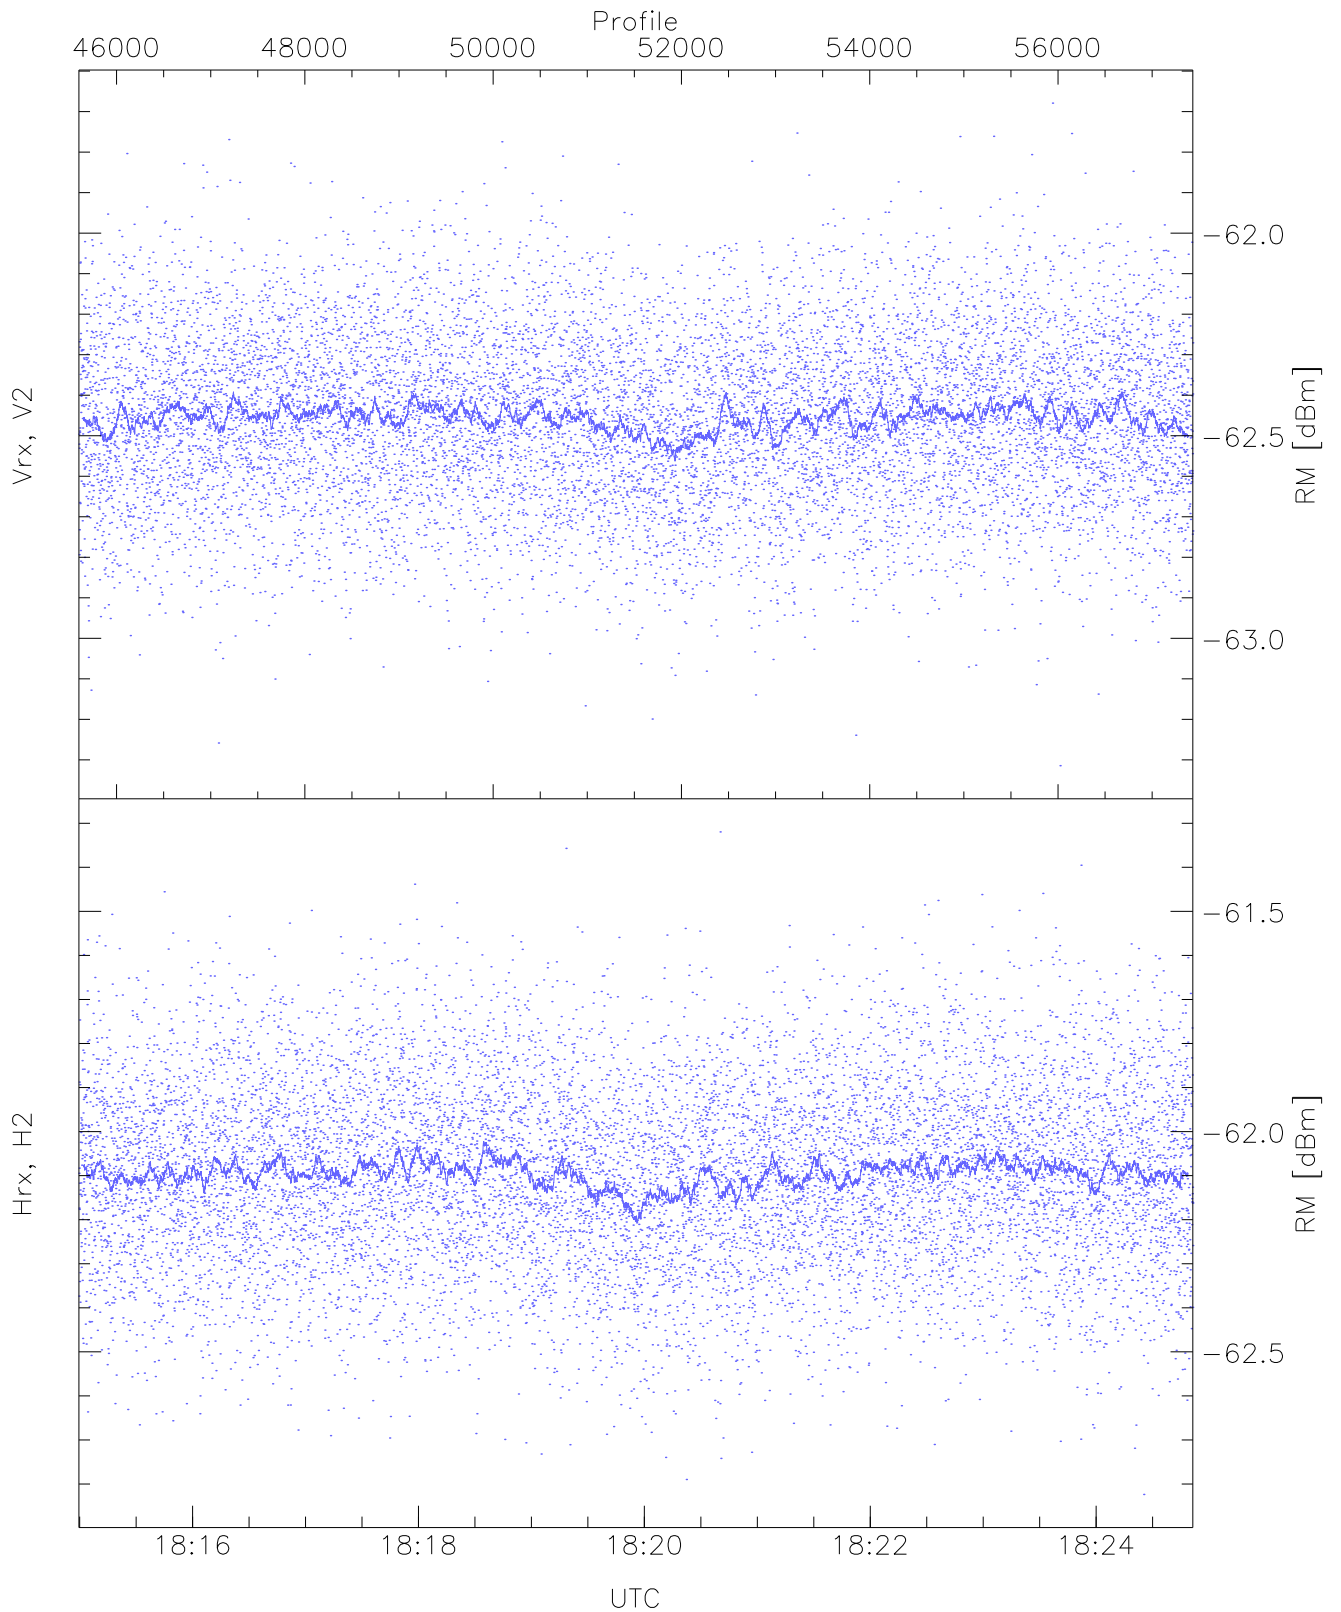


WCR2 CPP Receivers Noise Power from the Sky/RM Measurements

	Min	Max	Mean	Median	StDev
Vrx, V2(RM [dBm])	-63.31	-61.68	-62.45	-62.46	-75.84
Hrx, H2(RM [dBm])	-62.82	-61.32	-62.09	-62.10	-75.50

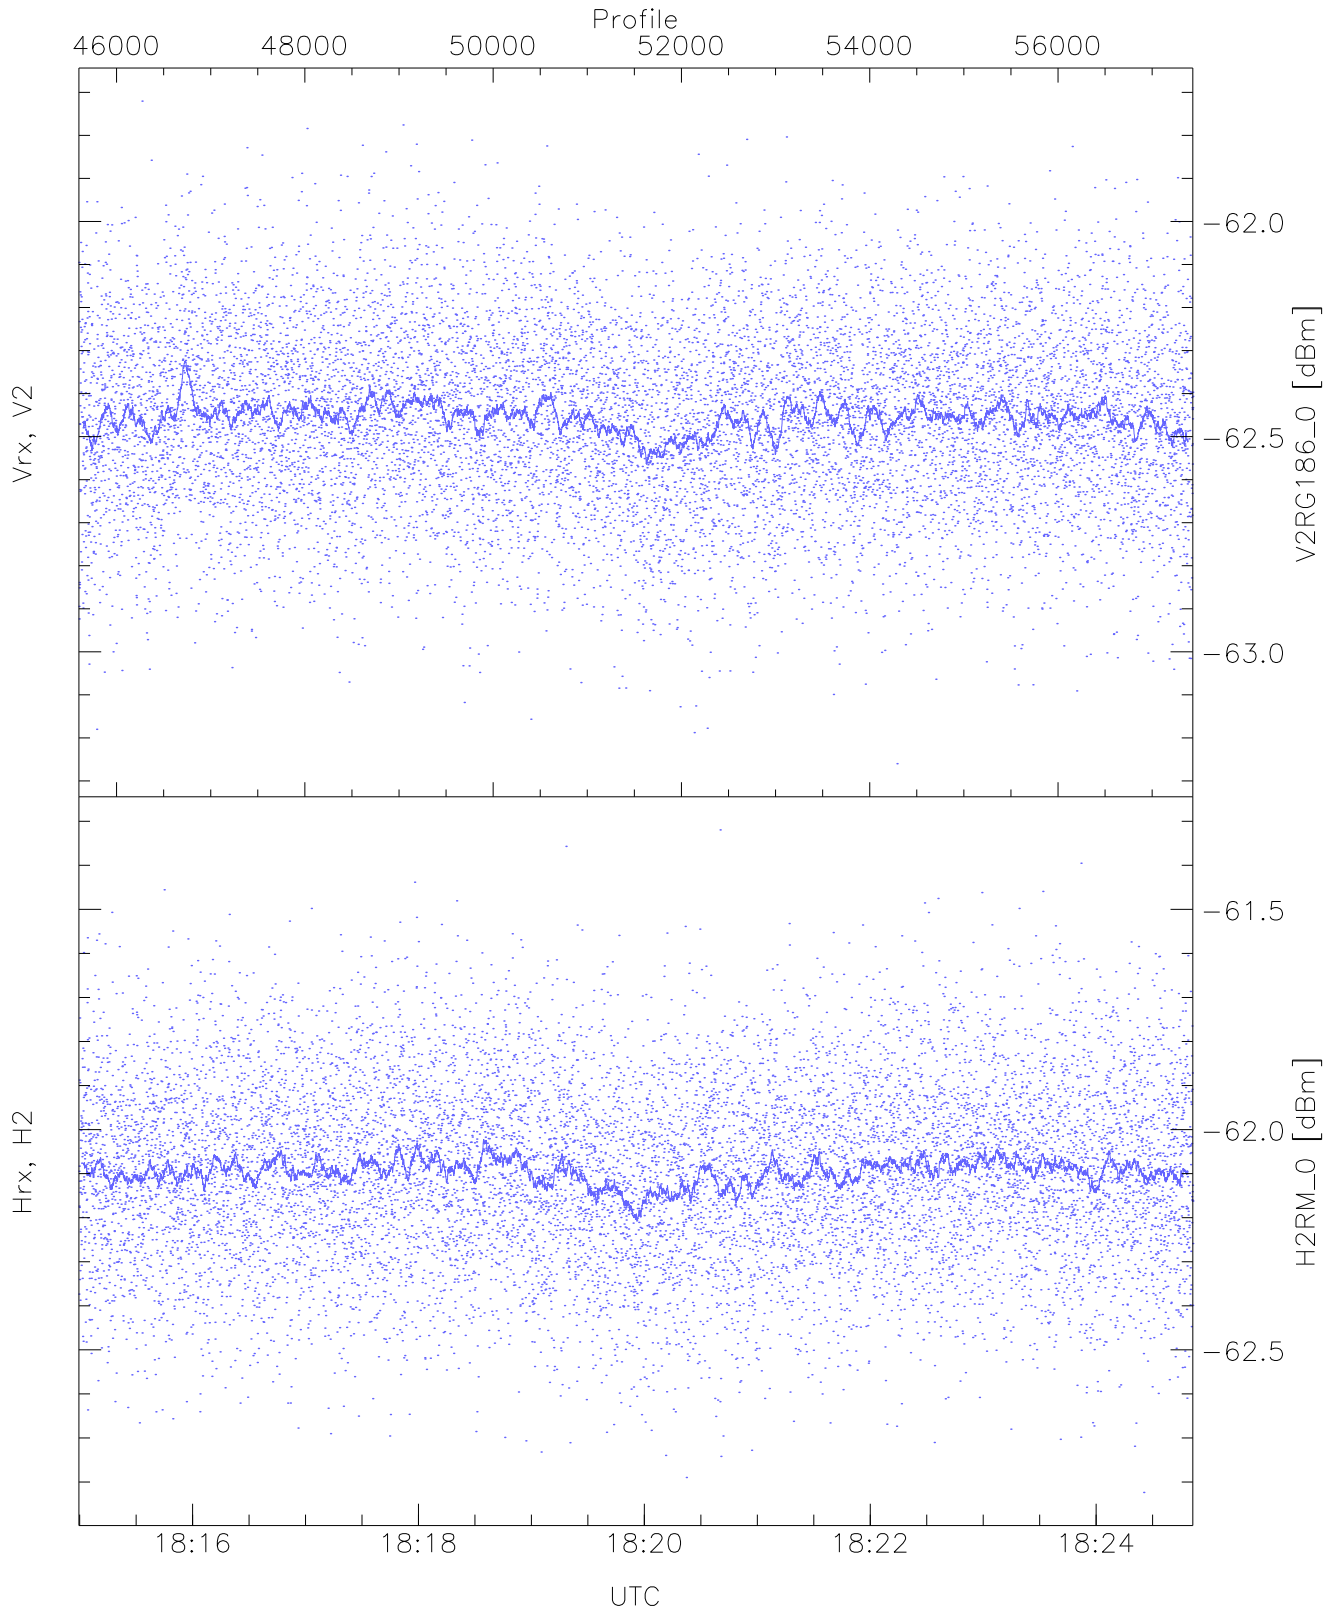


WCR2 CPP "Best" estimate Receivers Noise Power


	Min	Max	Mean	Median	StDev
V2RG186_0 [dBm]	-63.26	-61.72	-62.45	-62.46	-75.77
H2RM_0 [dBm]	-62.82	-61.32	-62.09	-62.10	-75.50

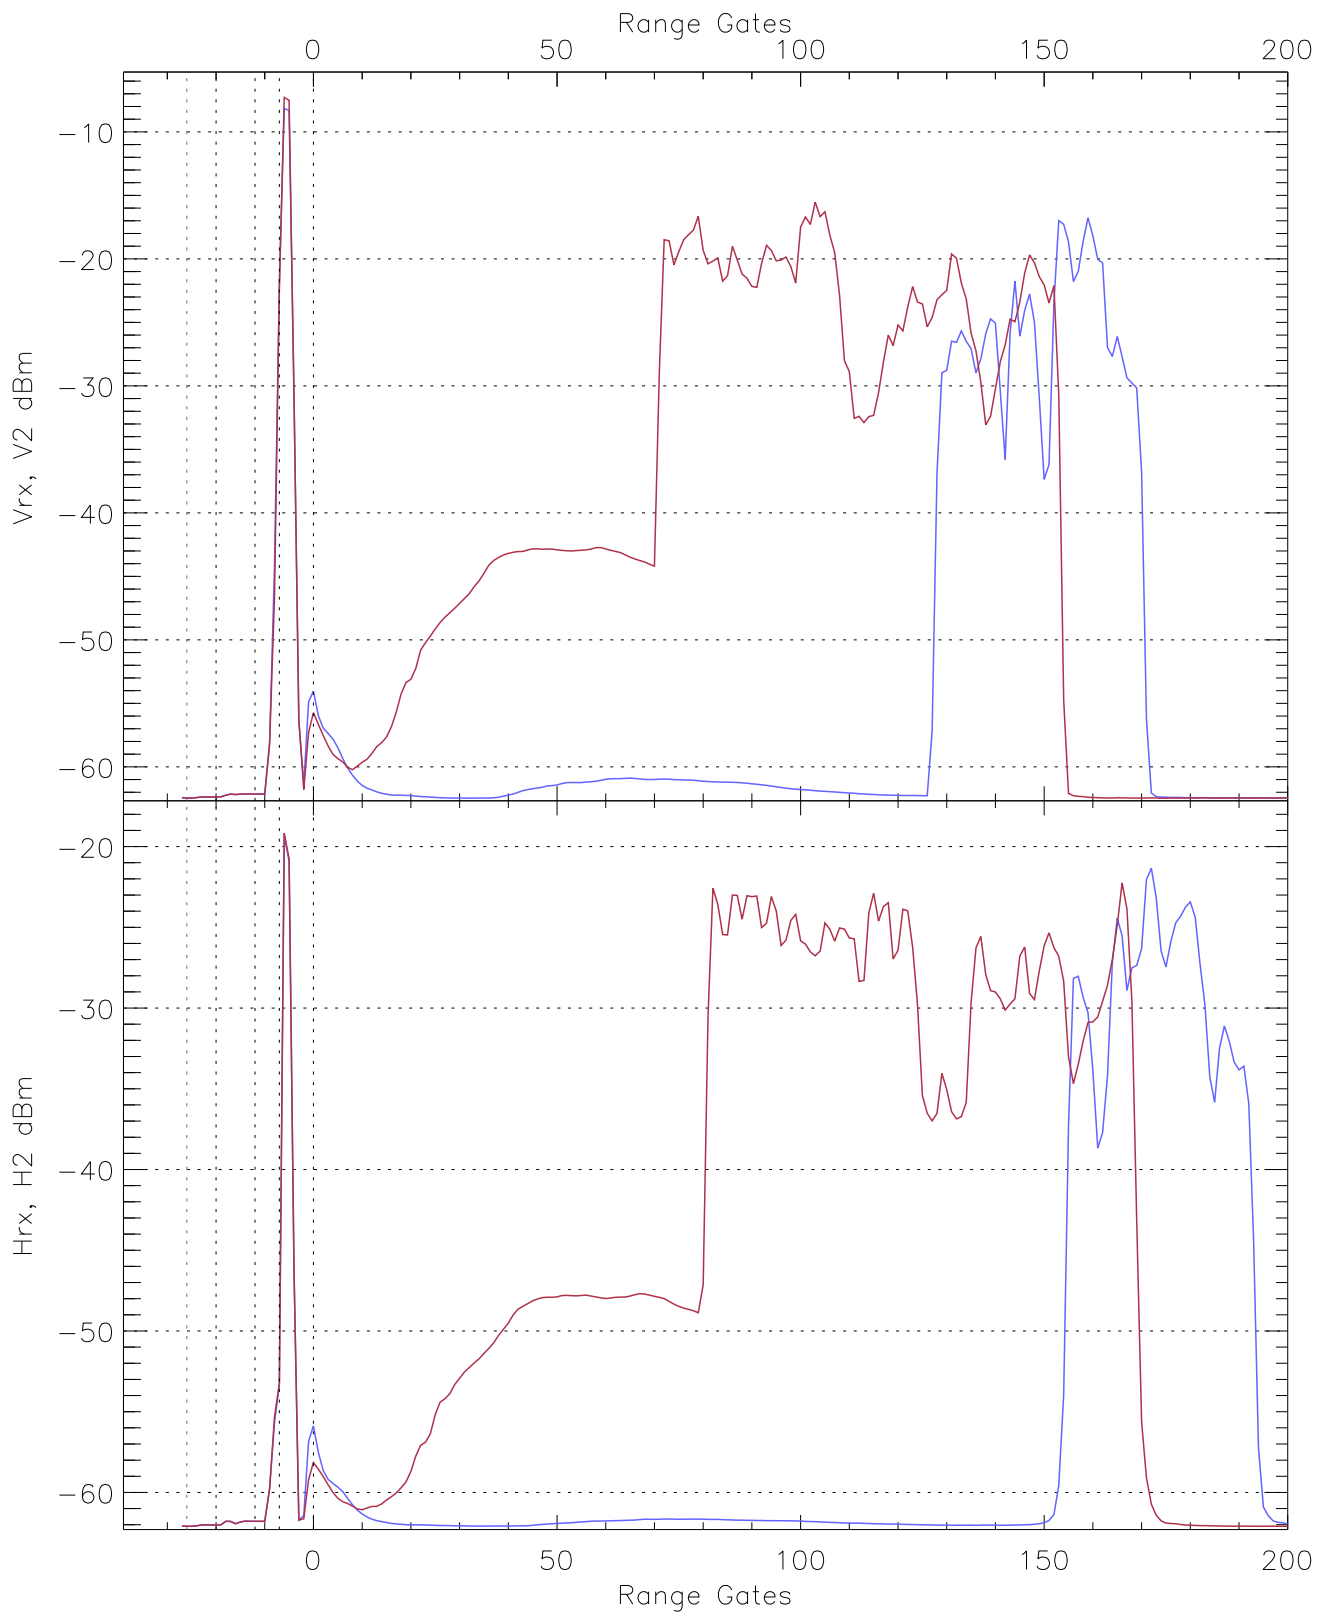


WCR2 CPP Averaged Received power for all recorded gates
blue: 181500-181955, 5917 profiles averaged
red: 181955-182451, 5917 profiles averaged

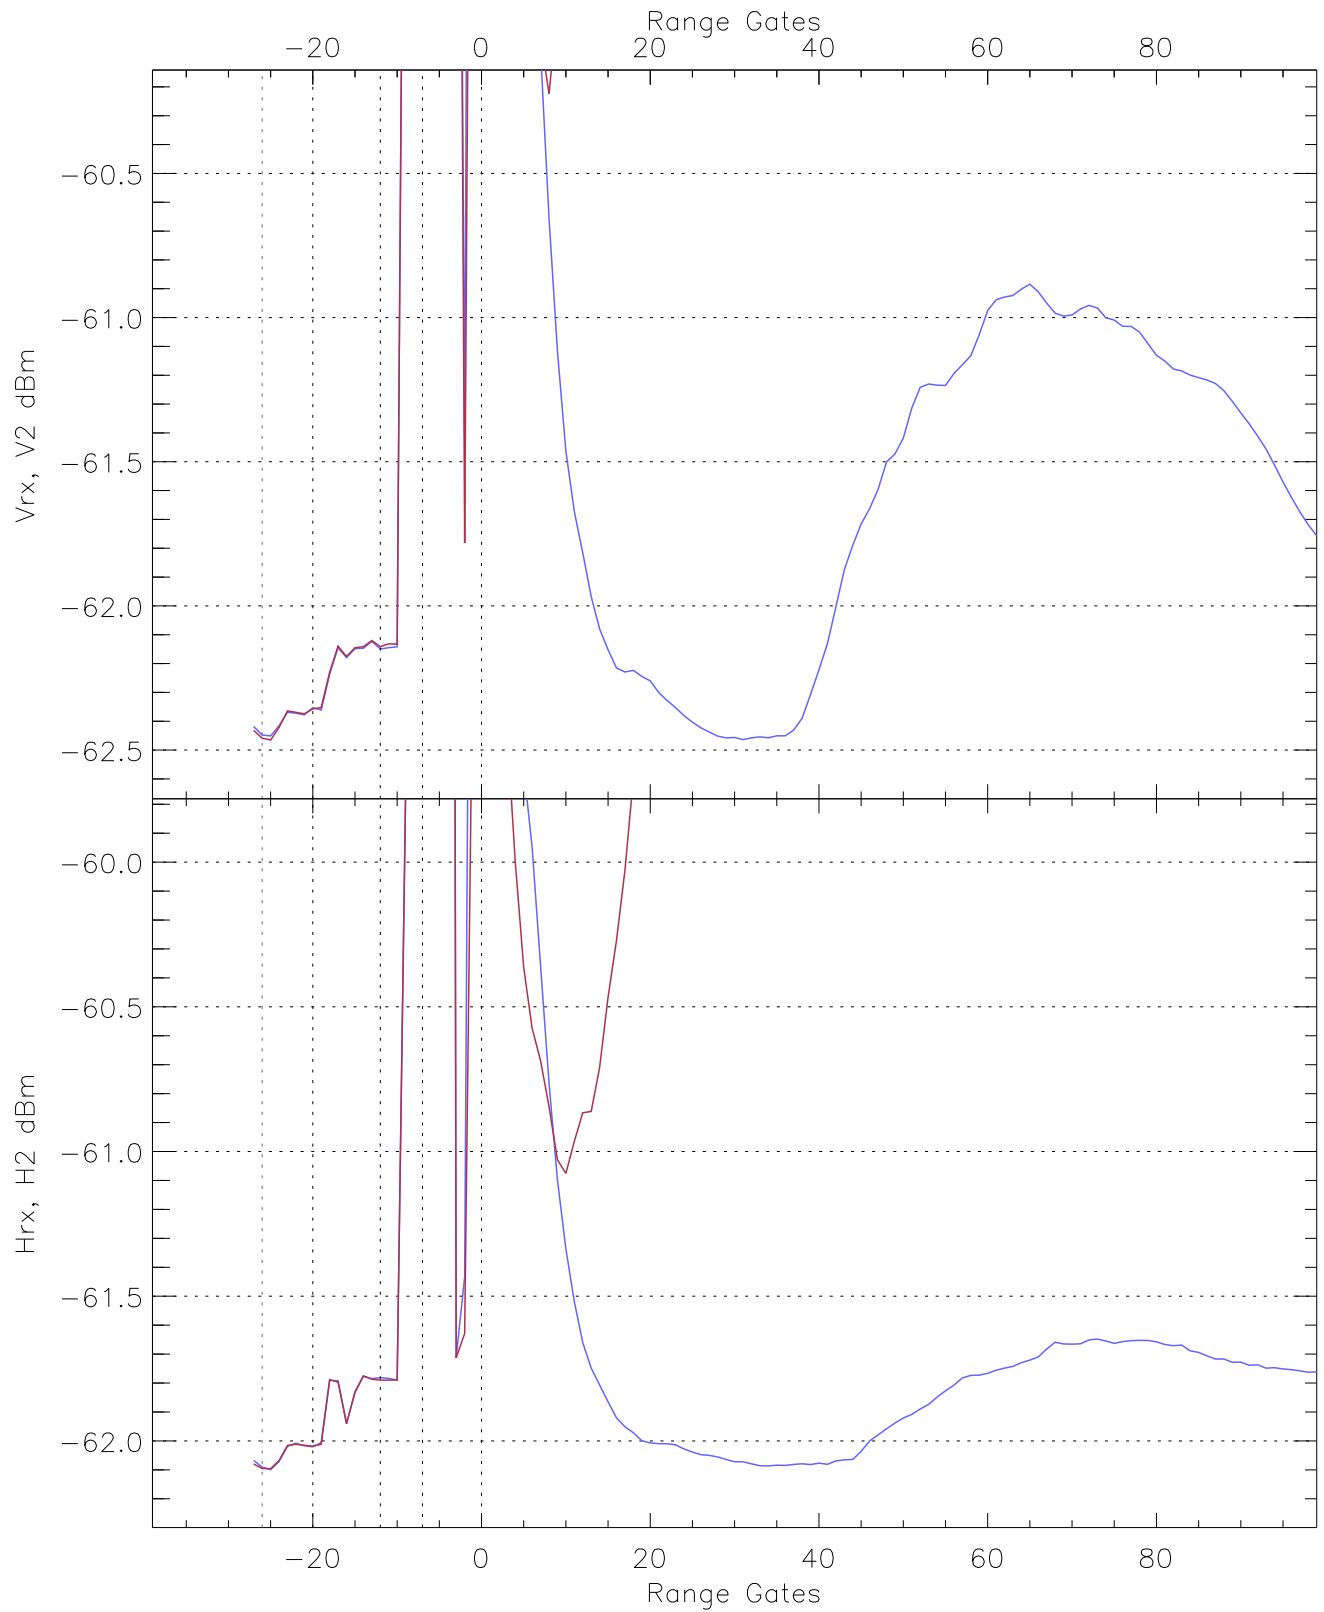

WCR2 CPP Averaged Received power for the negative gates and up to 100 gates
blue: 181500-181955, 5917 profiles averaged
red: 181955-182451, 5917 profiles averaged

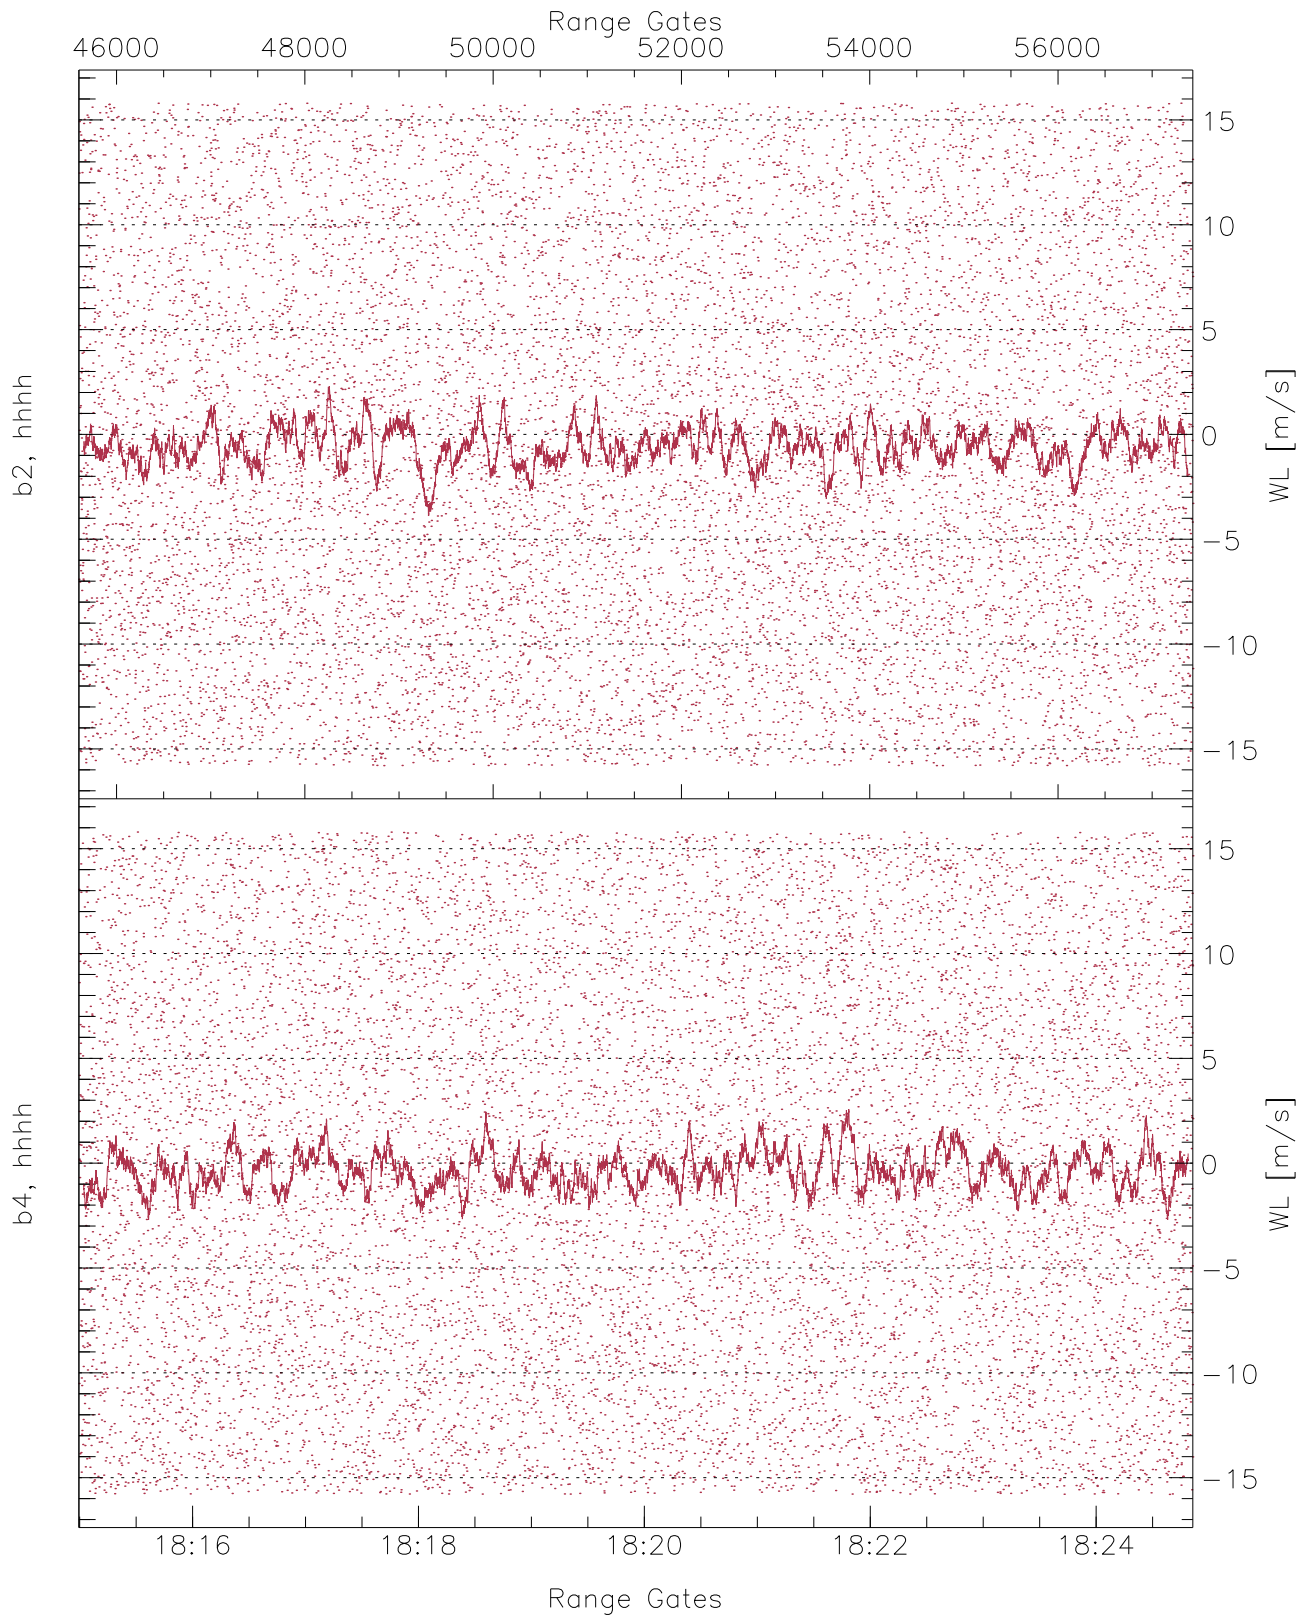


WCR2 CPP Receivers Phase Noise (in m/s) from the Warm Loads Measurements

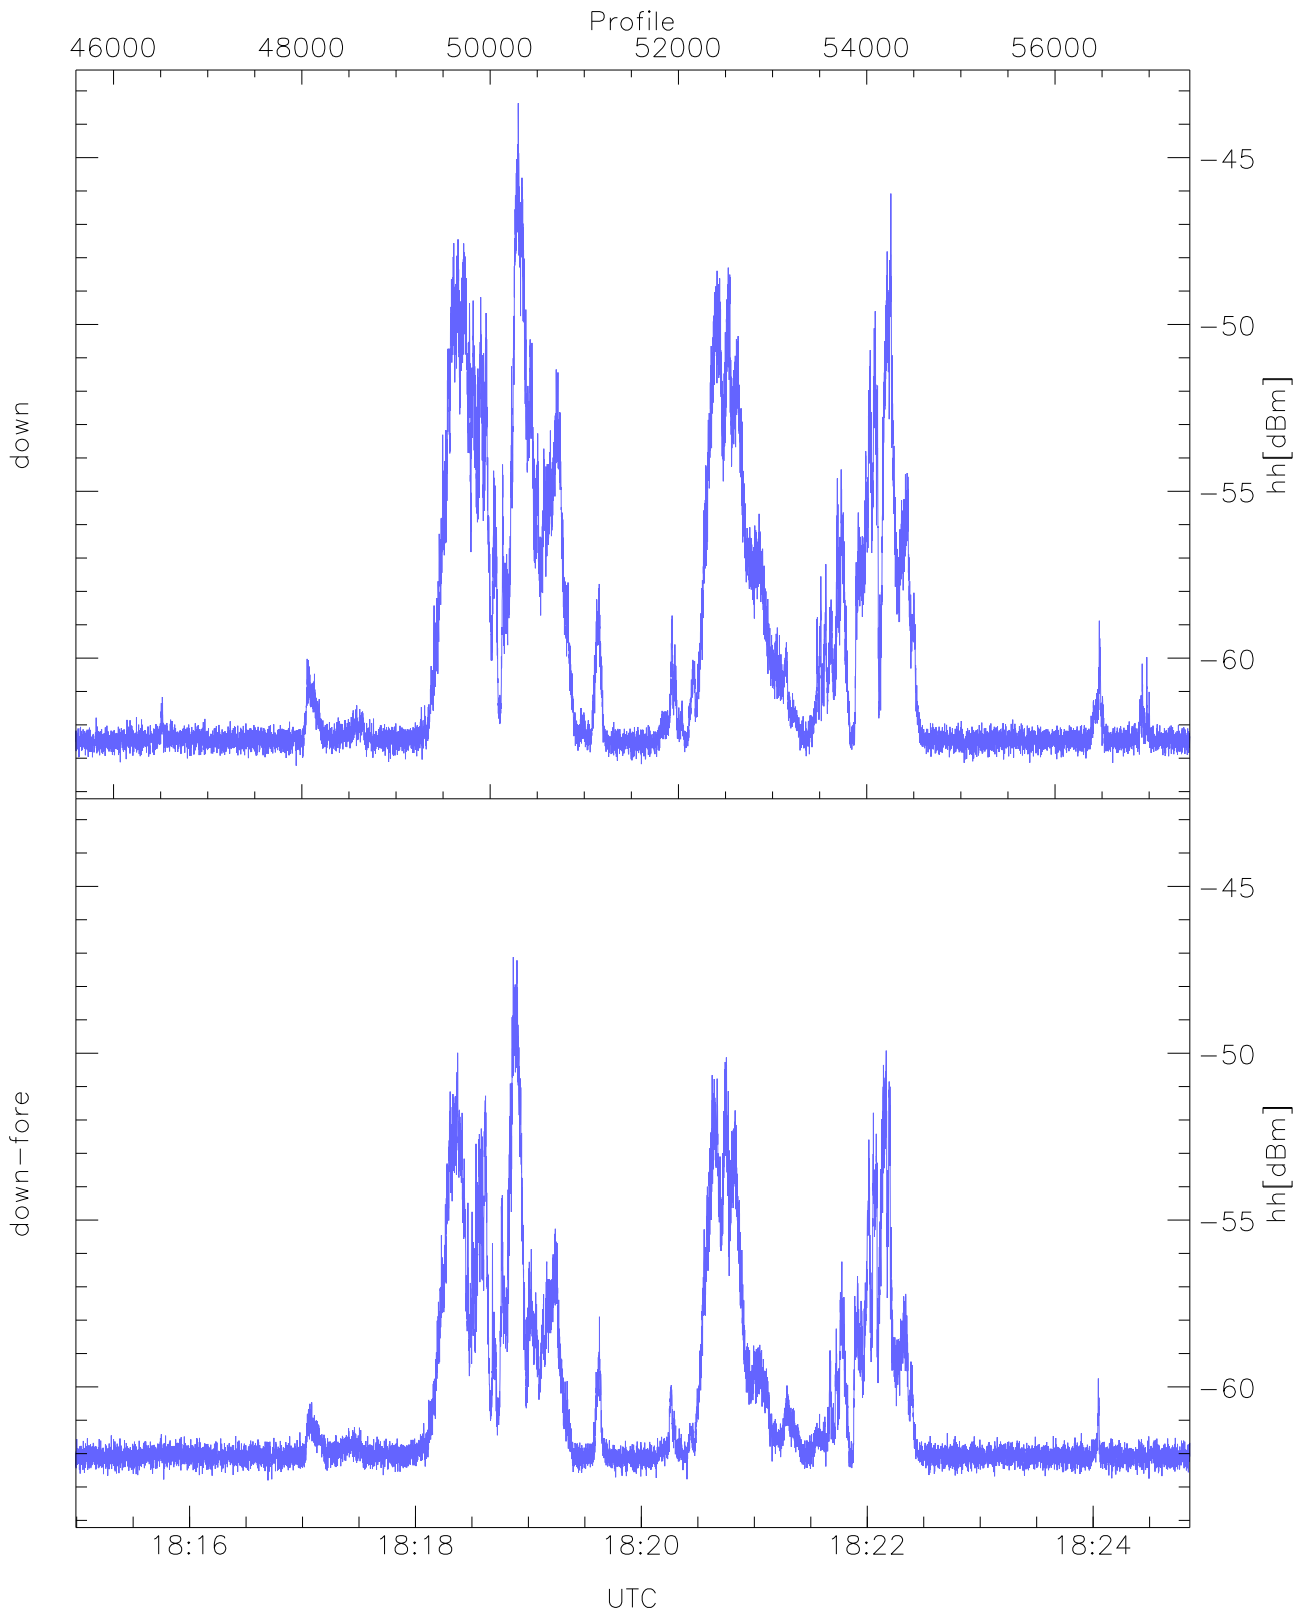


WCR2 CPP Received Power Products for Range gate 3 (150.2 m)

	Min	Max	Mean
down(hh[dBm])	-63.22	-43.37	-57.83
down-fore(hh[dBm])	-62.80	-47.12	-59.35

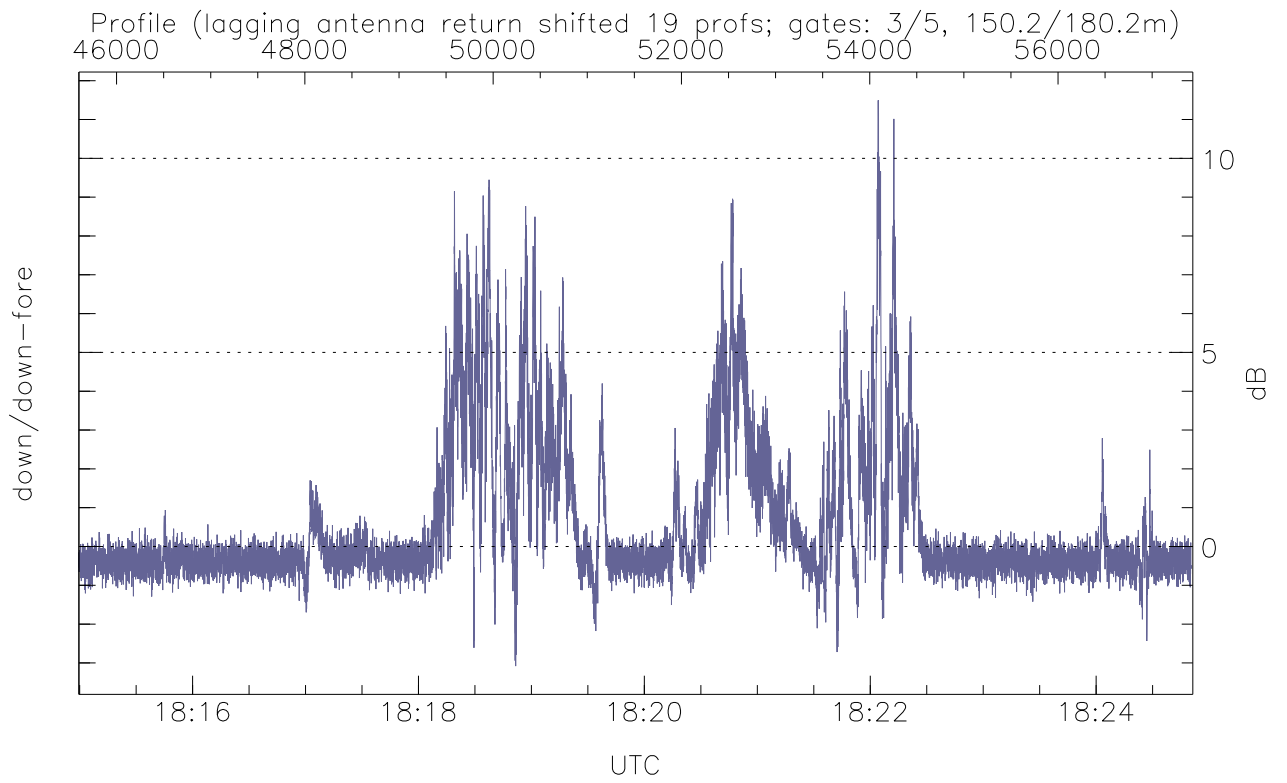

WCR2 Beam pairs Received Power Ratio(s); RangeGate: 3 (150 m)

	Min	Max	Mean
down/down-fore(dB)	-3.08	11.49	0.59

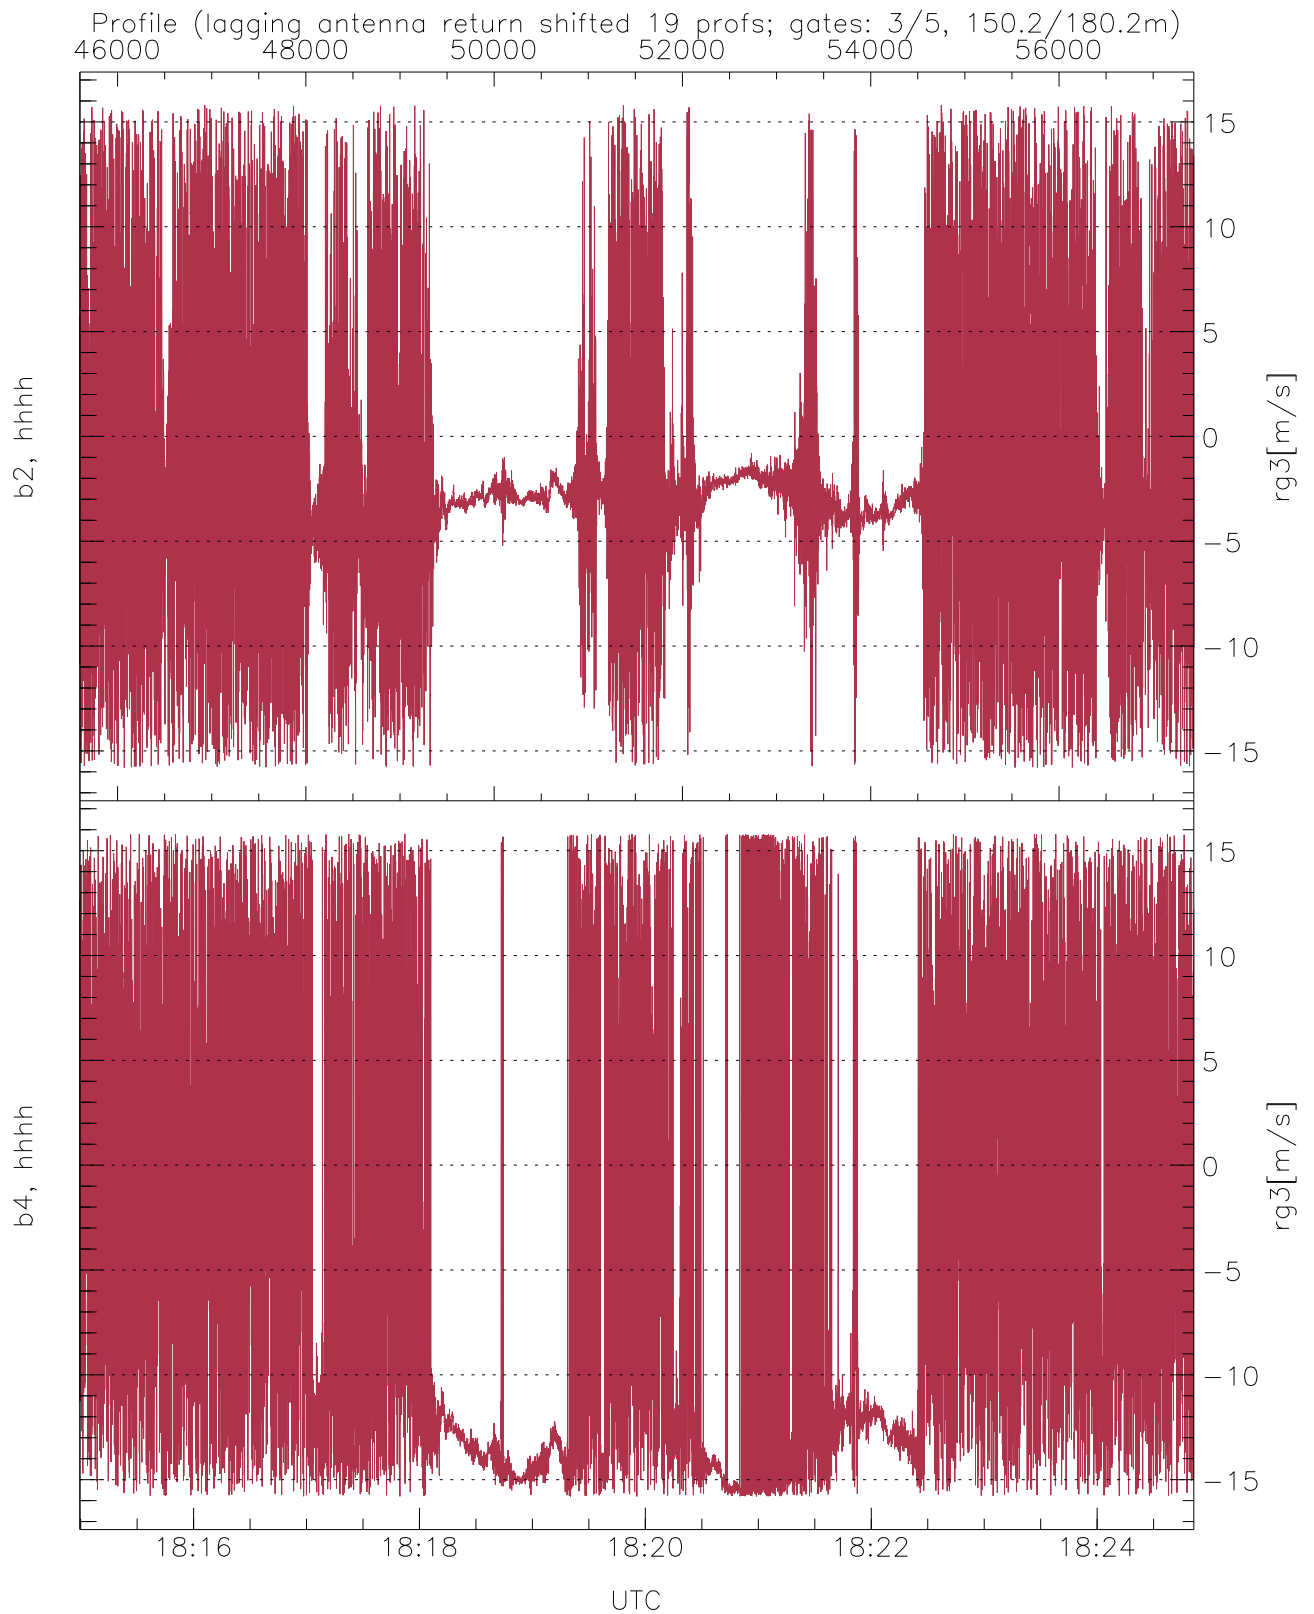

WCR2 CPP Doppler Velocity Products at 150.2 m range

	Min	Max	Mean	StDev
b2, hhhh(rg3[m/s])	-15.80	15.79	-1.91	6.66
b4, hhhh(rg3[m/s])	-15.80	15.80	-4.52	10.16