




WCR2 CPP Tx Power Monitor, Profile Time Interval, HotLoad/WarmLoad Ratios


UTC: 19:38:44-19:52:35, Dur: 831.53s
 TimeCor: 0.00s, TimeFlg: 1, TFPstatus constant
 TimeInt/PPS(min,max,mn,std): 60.0,60.0,60.0,0.0 ms / 17,17,17
 NumRec(r/t): 13854/13854, 0-13853/19:38:44-19:52:35
 AcqTime: 60.0ms, Rate: 108KB/s, Averages: 500
 Pulse: 250ns, IFF: 4.0MHz, Tx: H1 H1
 PRF: 16.7 KHz, IGS: 60us
 Range(min,max,rgs): 105,7689,15.0 m, Gates: 506, Aspect: 2.2

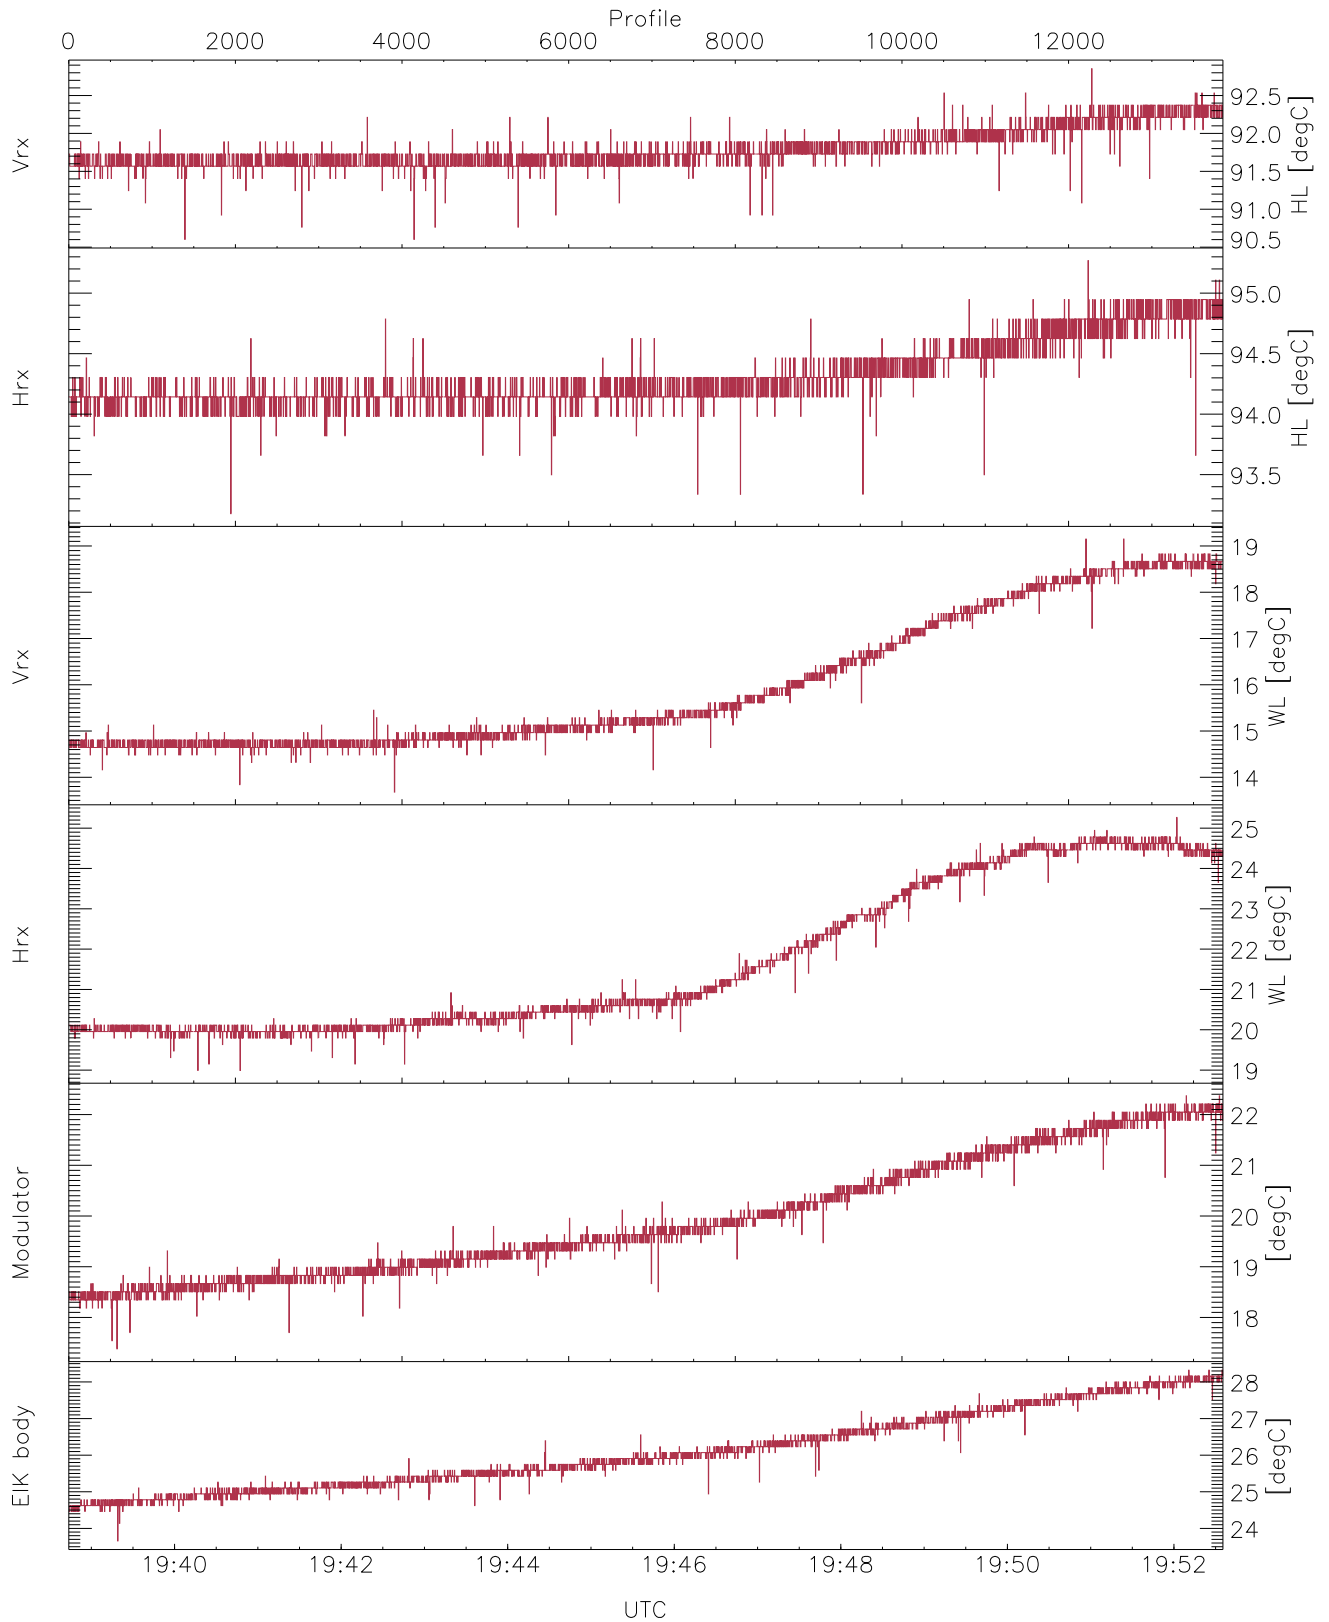

WCR2 CPP Temperature Monitor: Hot Loads, Warm Loads, Modulator Body, EIK Body


mintempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 90,93,13,18,17,23
maxtempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 92,95,19,25,22,28
LOalarm(20,80,240,2.8,14.8 MHz): 0,0,0,43,0
EIK/Modulator Faults: None

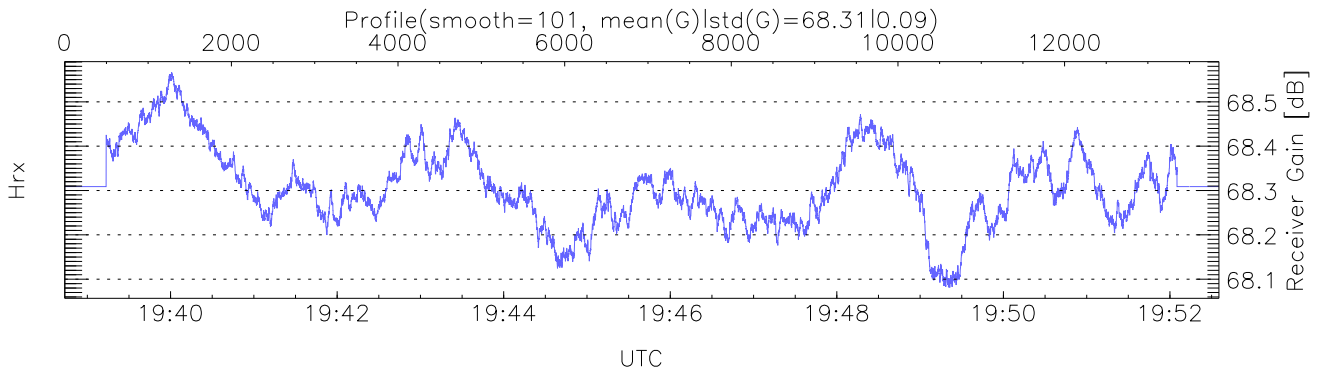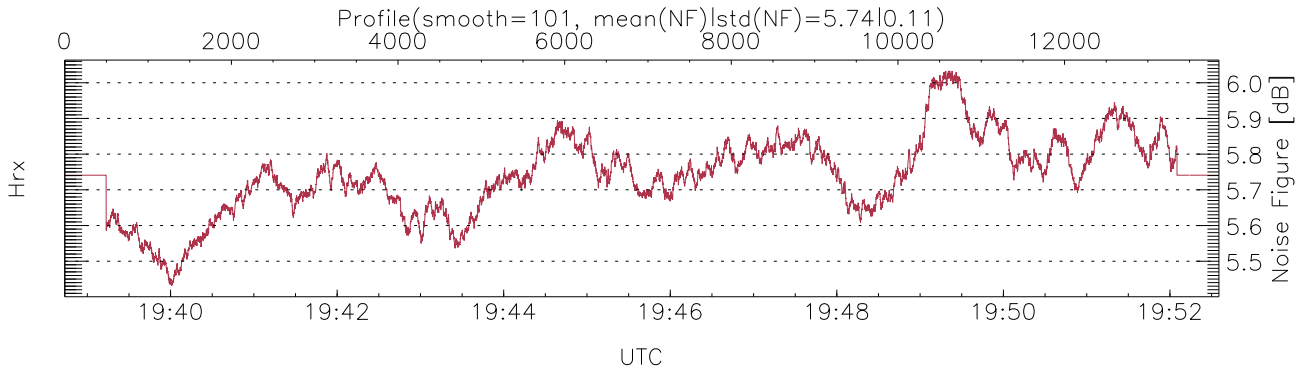

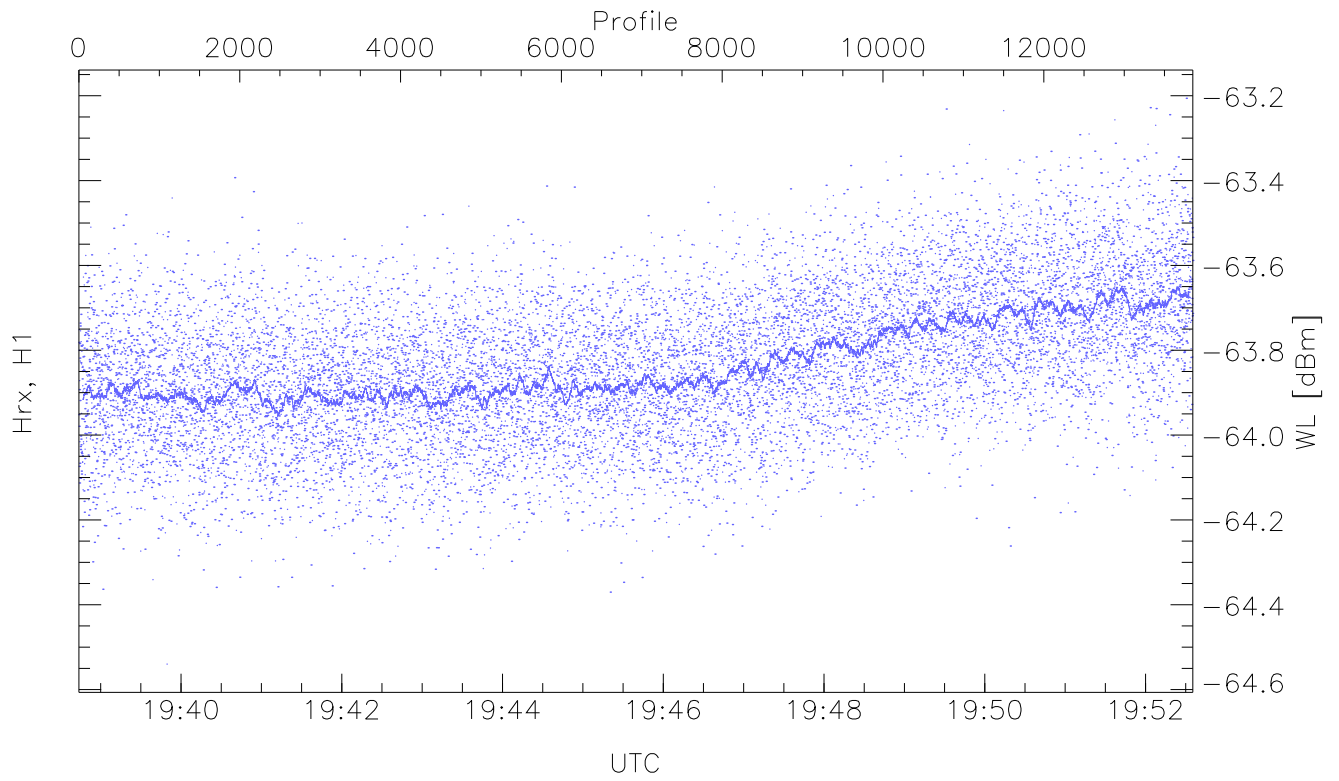


WCR2 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(WL [dBm])	-64.54	-63.21	-63.83	-63.84	-78.04

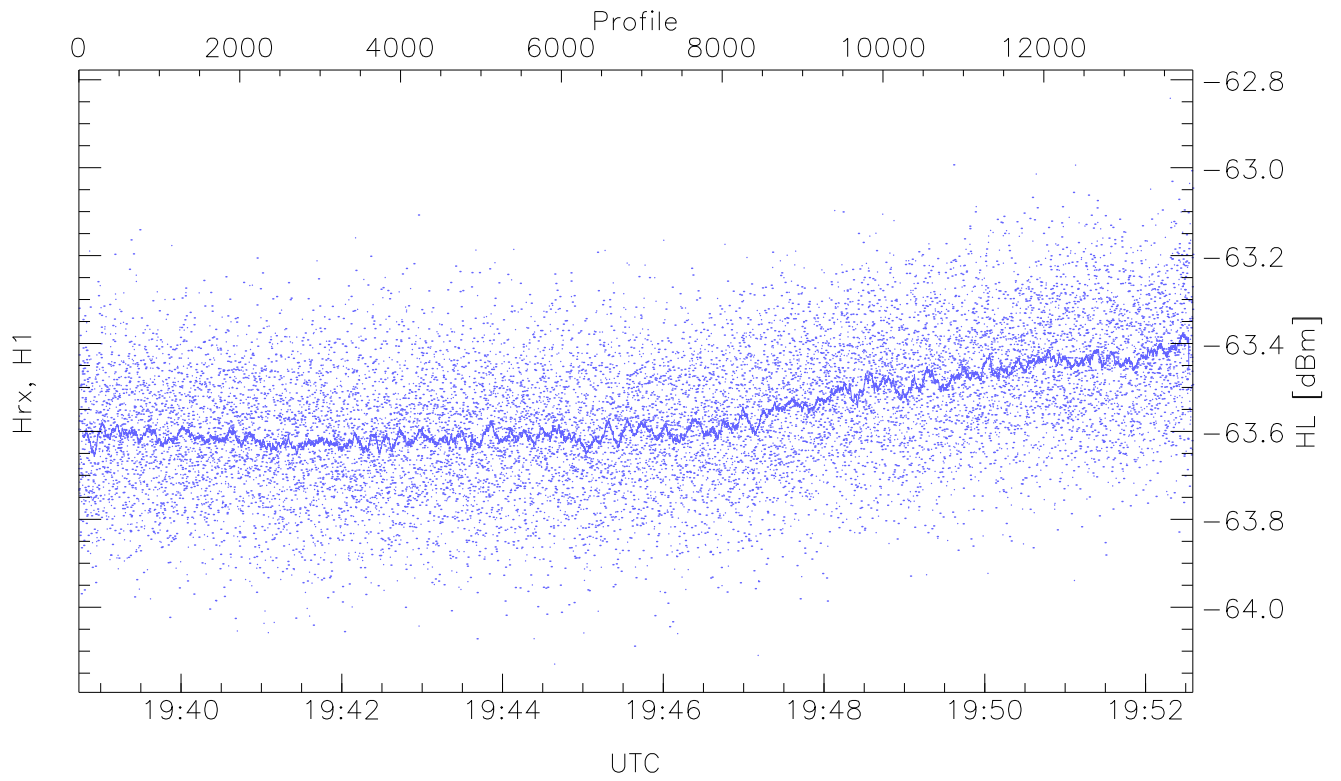


WCR2 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(HL [dBm])	-64.13	-62.84	-63.56	-63.56	-77.91

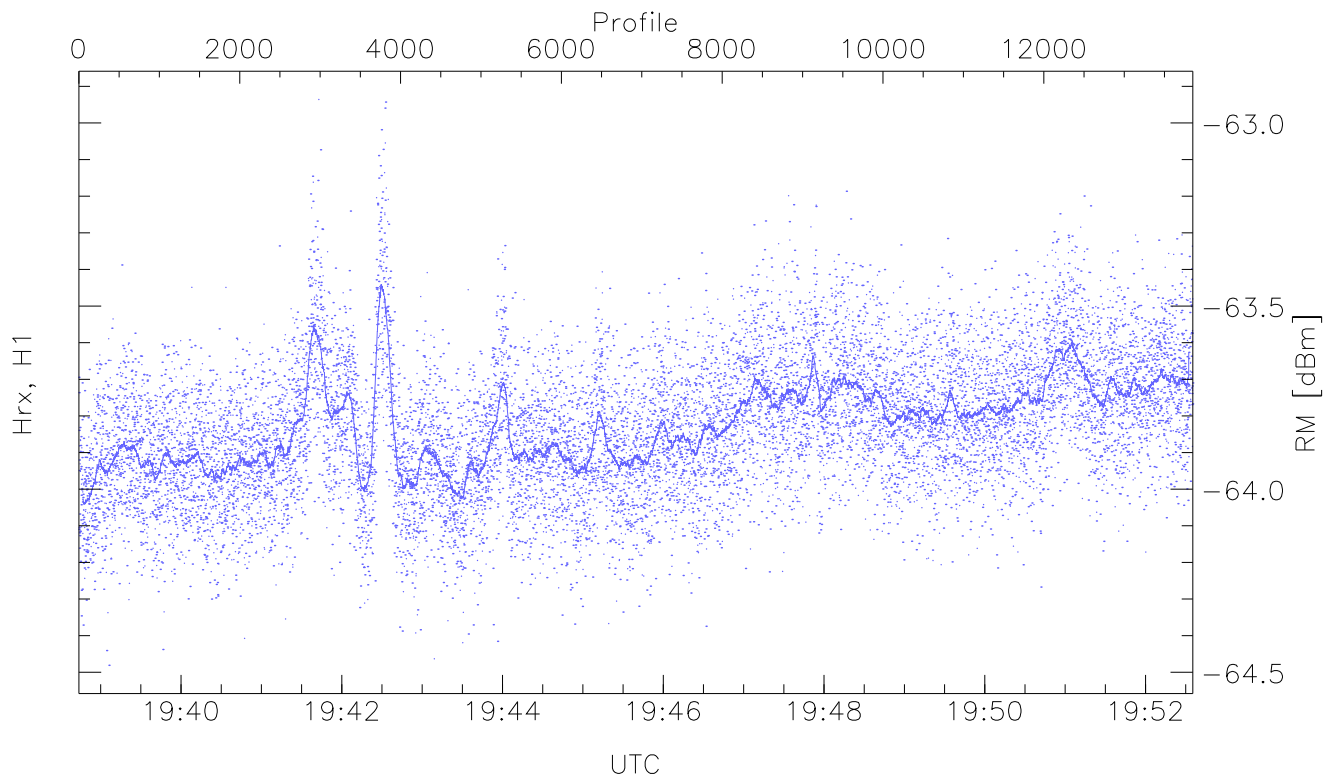


WCR2 CPP Receivers Noise Power from the Sky/RM Measurements

Hrx, H1(RM [dBm])	Min	Max	Mean	Median	StDev
	-64.48	-62.94	-63.82	-63.83	-77.56

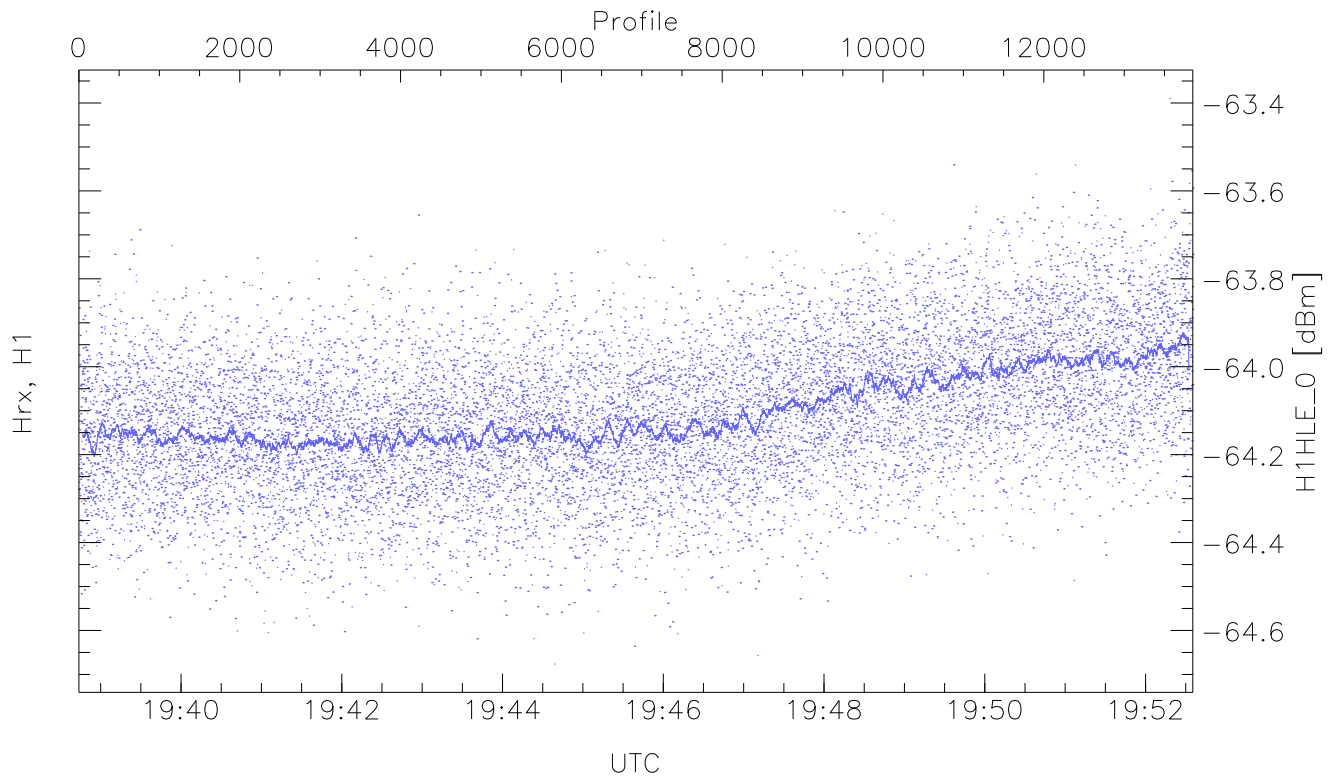


WCR2 CPP "Best" estimate Receivers Noise Power


	Min	Max	Mean	Median	StDev
H1HLE_0 [dBm]	-64.68	-63.39	-64.10	-64.11	-78.46

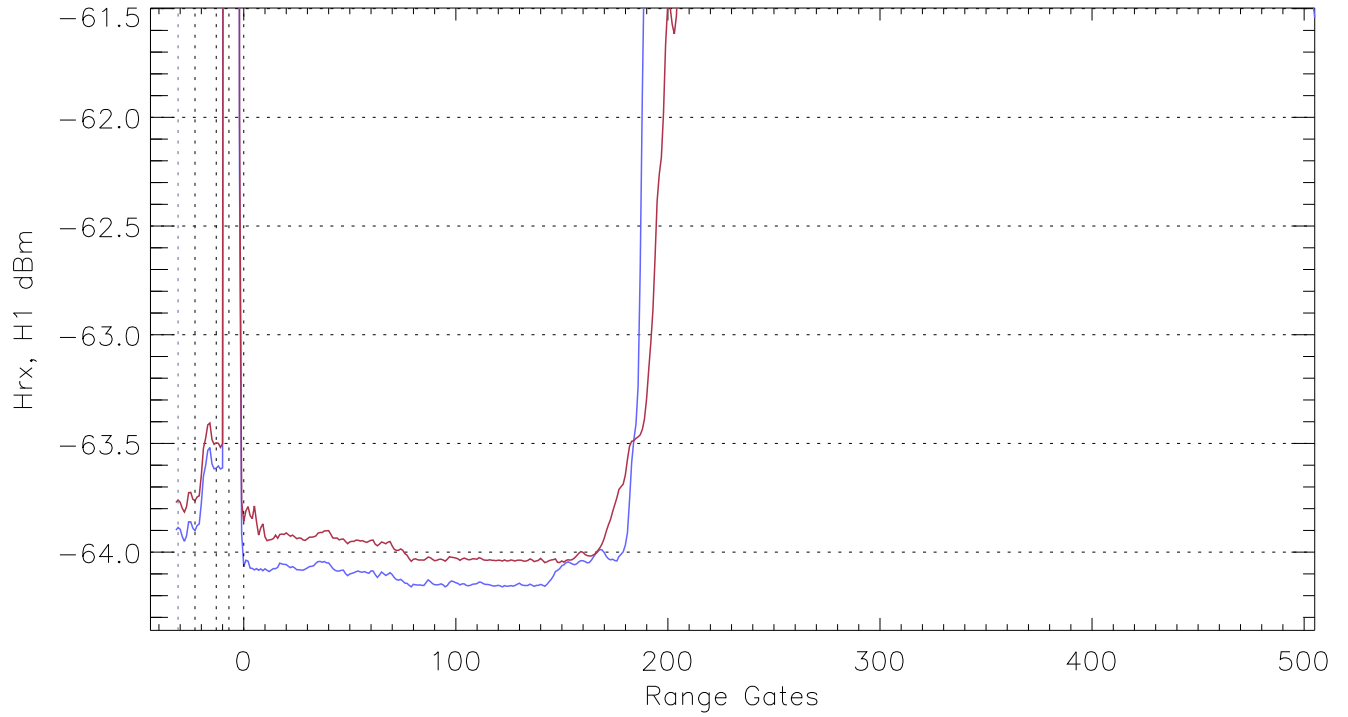

WCR2 CPP Averaged Received power for all recorded gates
blue: 193844-194539, 6928 profiles averaged
red: 194539-195235, 6927 profiles averaged

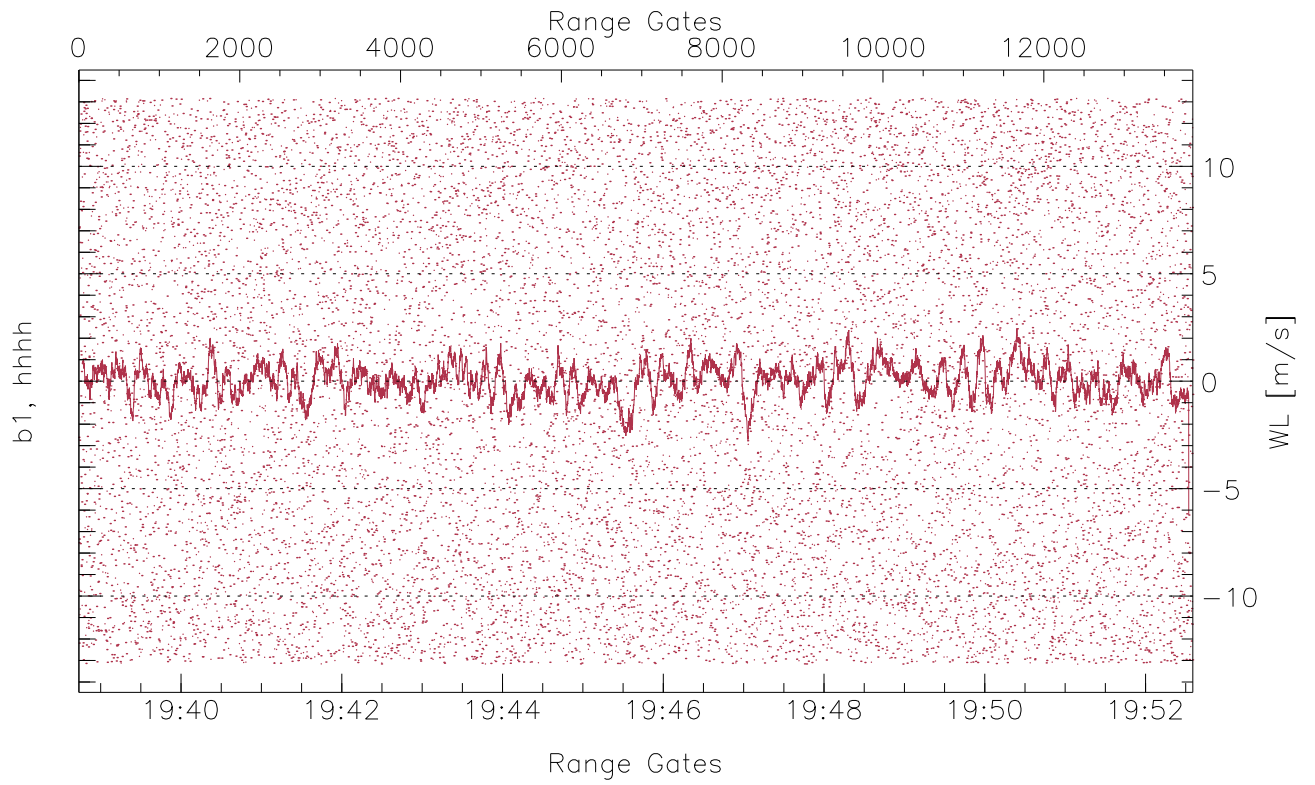


WCR2 CPP Receivers Phase Noise (in m/s) from the Warm Loads Measurements

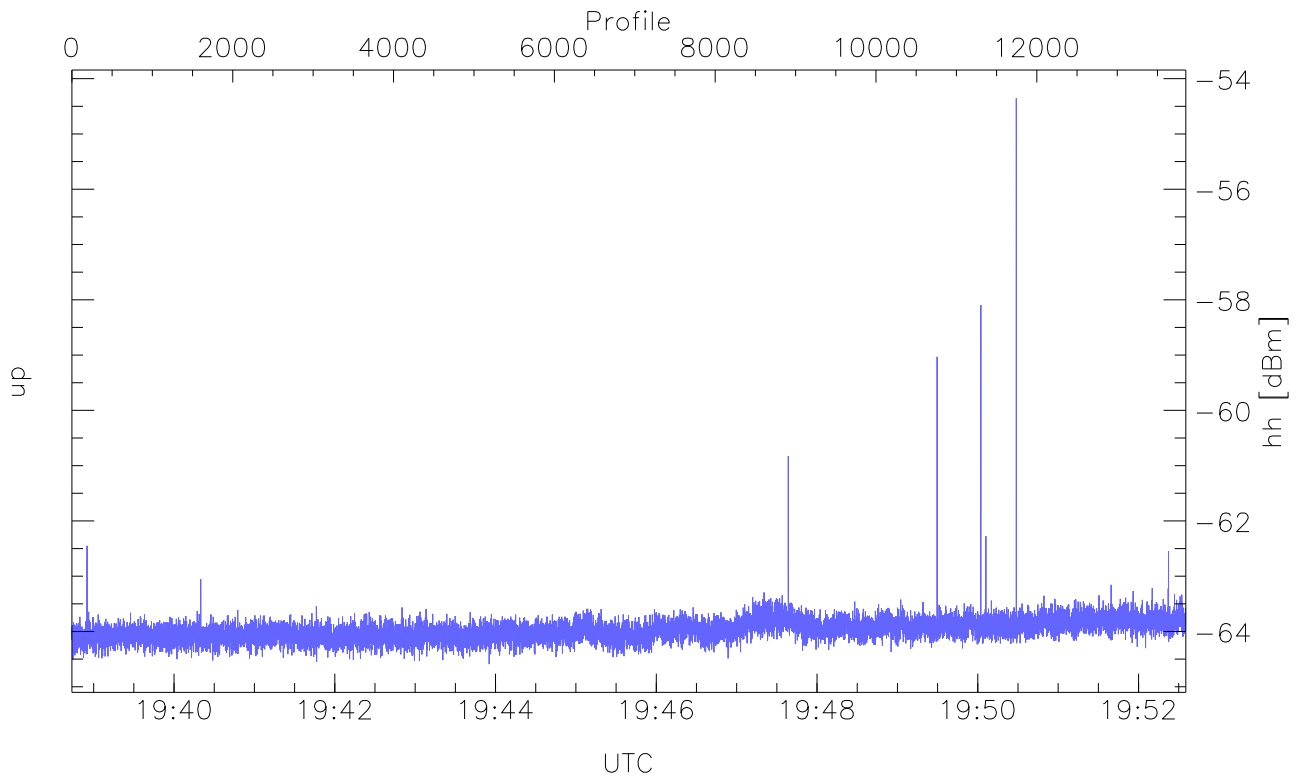

WCR2 CPP Received Power Products for Range gate 0 (105.1 m)

	Min	Max	Mean
up(hh [dBm])	-64.59	-54.36	-63.96

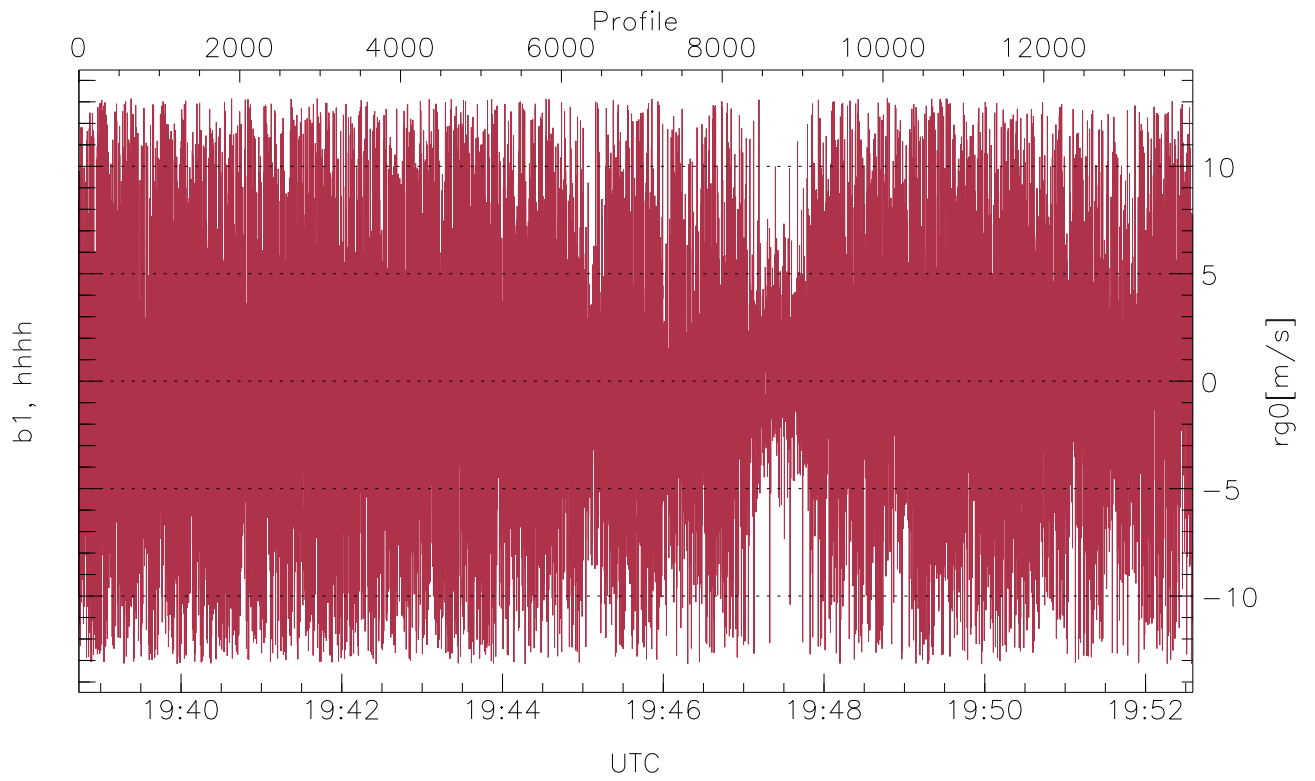

WCR2 CPP Doppler Velocity Products at 105.1 m range

	Min	Max	Mean	StDev
b1, hhhh(rg0[m/s])	-13.17	13.16	0.12	6.10