




WCR2 CPP Tx Power Monitor, Profile Time Interval, HotLoad/WarmLoad Ratios


UTC: 14:41:14-15:06:02, Dur: 1488.12s  
 TimeCor: 0.00s, TimeFlg: 1, TFPstatus constant  
 TimeInt/PPS(min,max,mn,std): 50.0,50.0,50.0,0.0 ms / 20,20,20  
 NumRec(r/t): 22800/29756, 0-22799/14:41:14-15:00:14  
 AcqTime: 50.0ms, Rate: 106KB/s, Averages: 500  
 Pulse: 250ns, IFF: 4.0MHz, Tx: H1 H1  
 PRF: 20.0 KHz, IGS: 50us  
 Range(min,max,rgs): 105,6187,15.0 m, Gates: 406, Aspect: 2.6

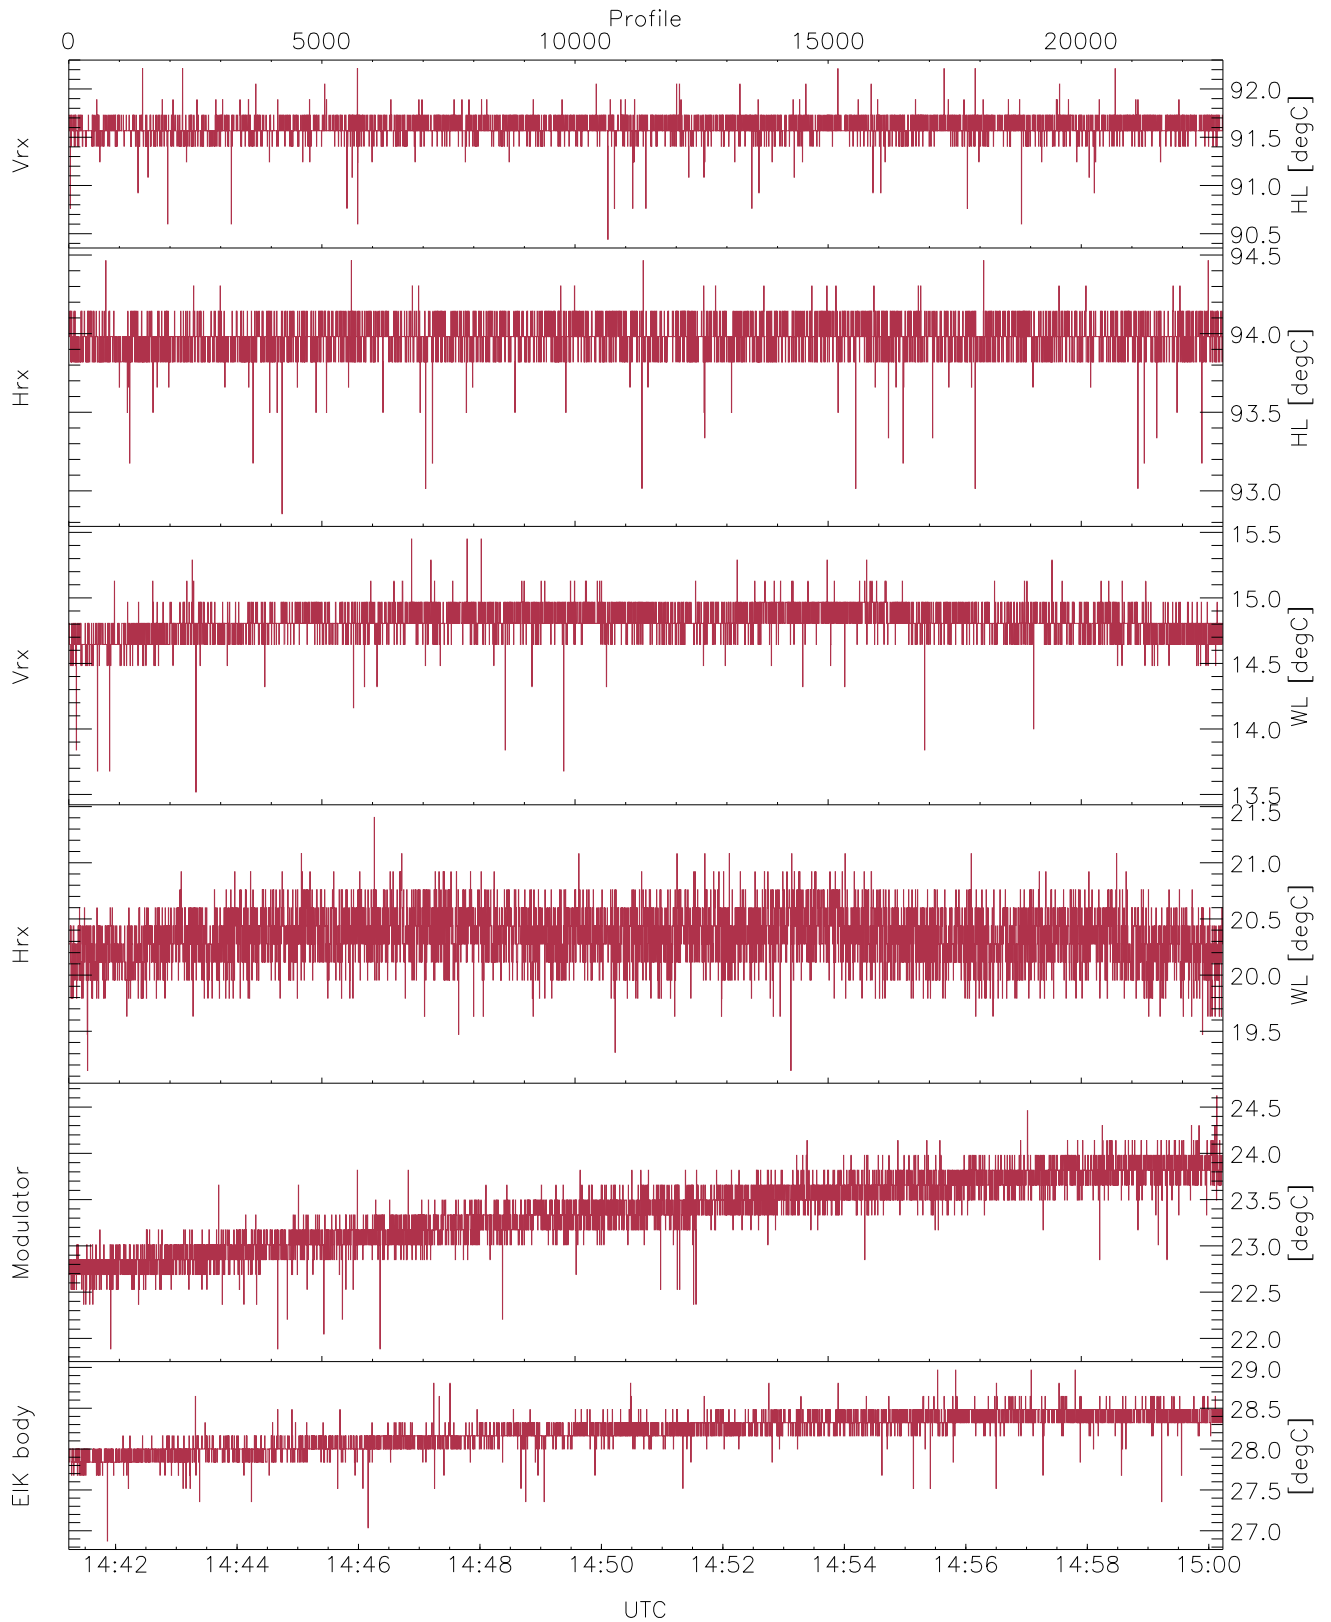

WCR2 CPP Temperature Monitor: Hot Loads, Warm Loads, Modulator Body, EIK Body


mintempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 90,92,13,19,21,26  
maxtempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 92,94,15,21,24,28  
LOalarm(20,80,240,2.8,14.8 MHz): 0,0,0,46,0  
EIK/Modulator Faults: None

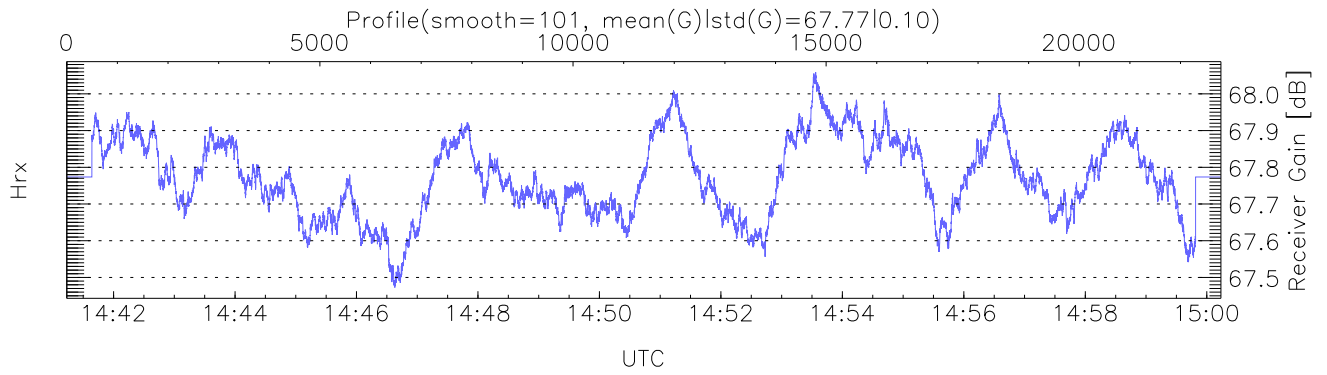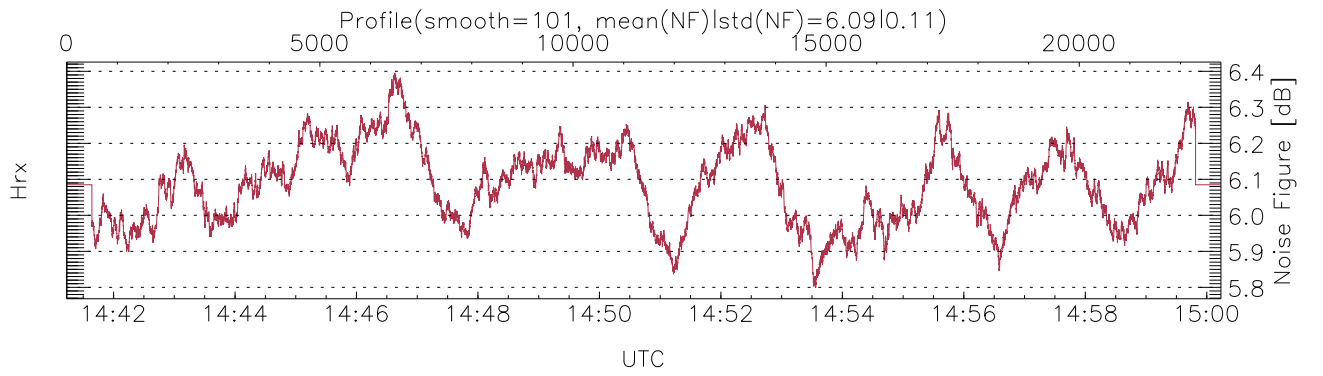

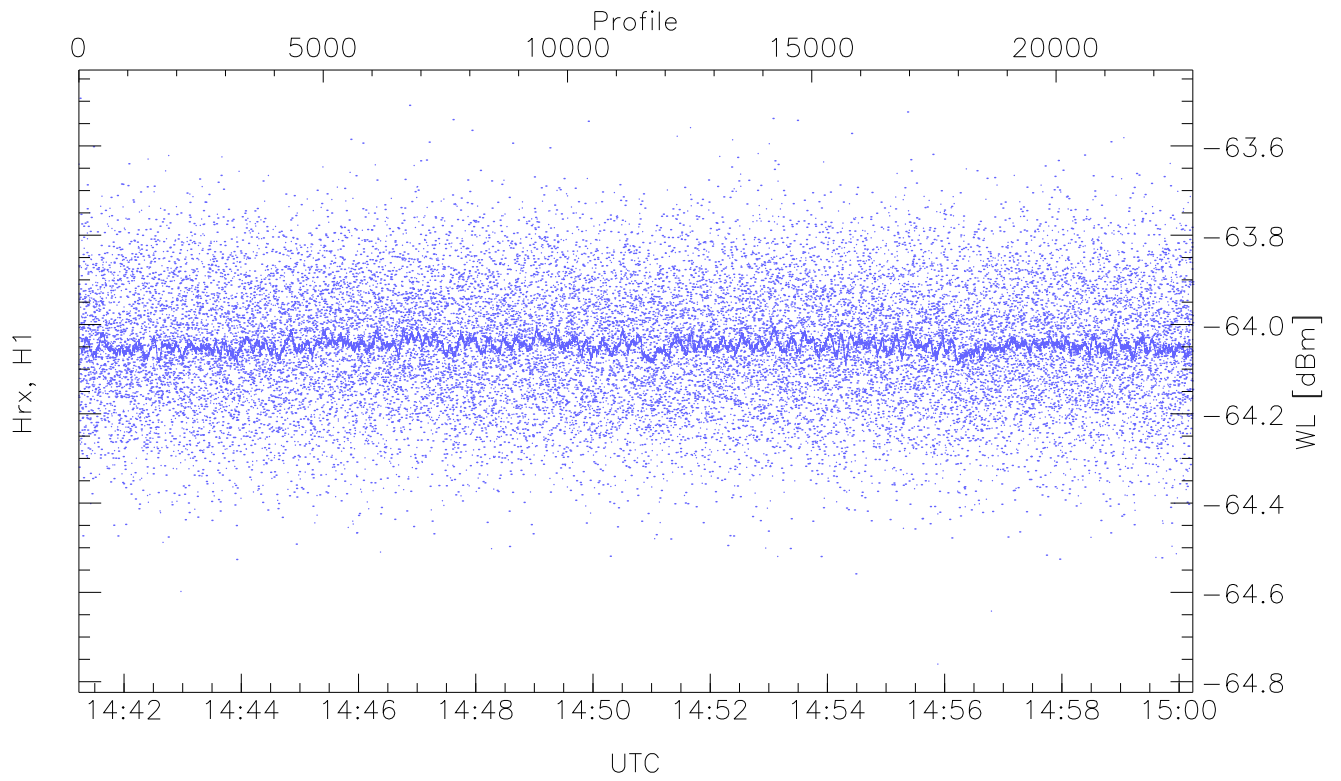


WCR2 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(WL [dBm])	-64.76	-63.49	-64.05	-64.05	-78.95

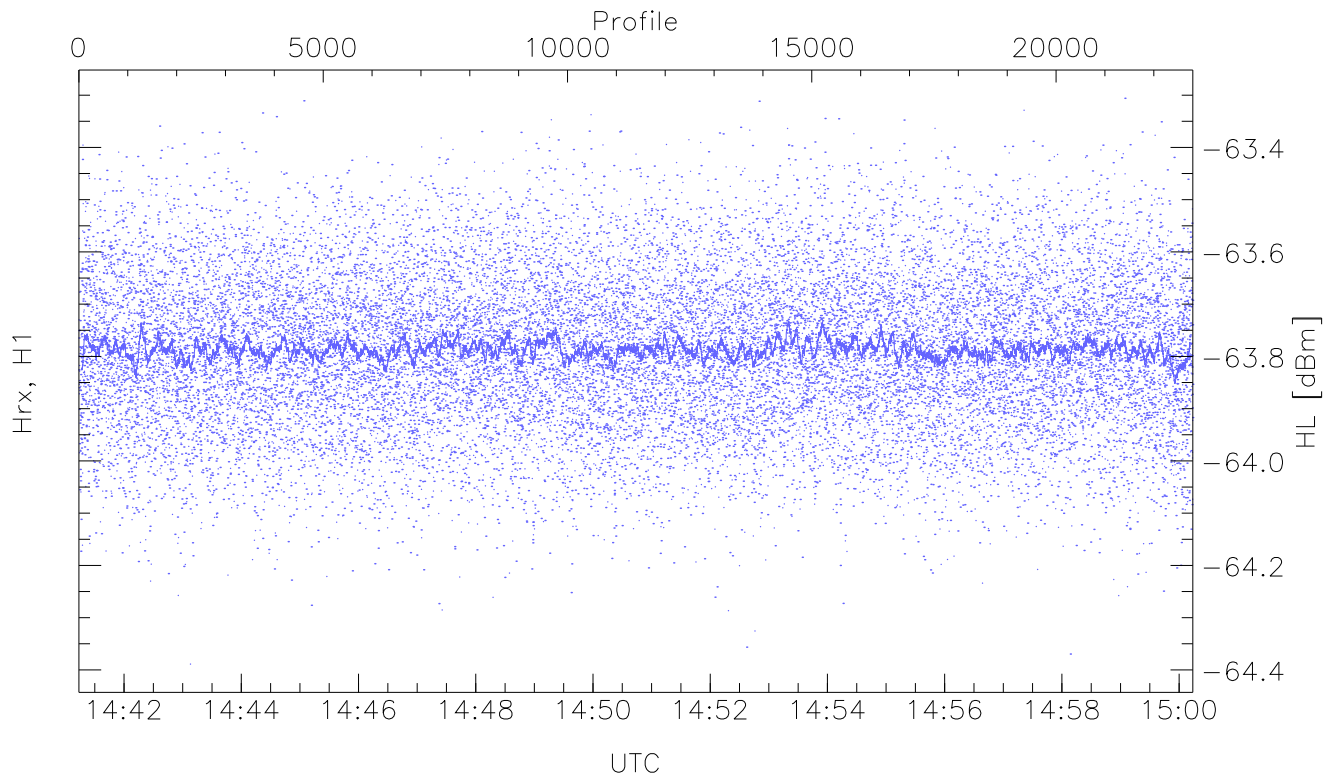


WCR2 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(HL [dBm])	-64.39	-63.31	-63.79	-63.79	-78.67

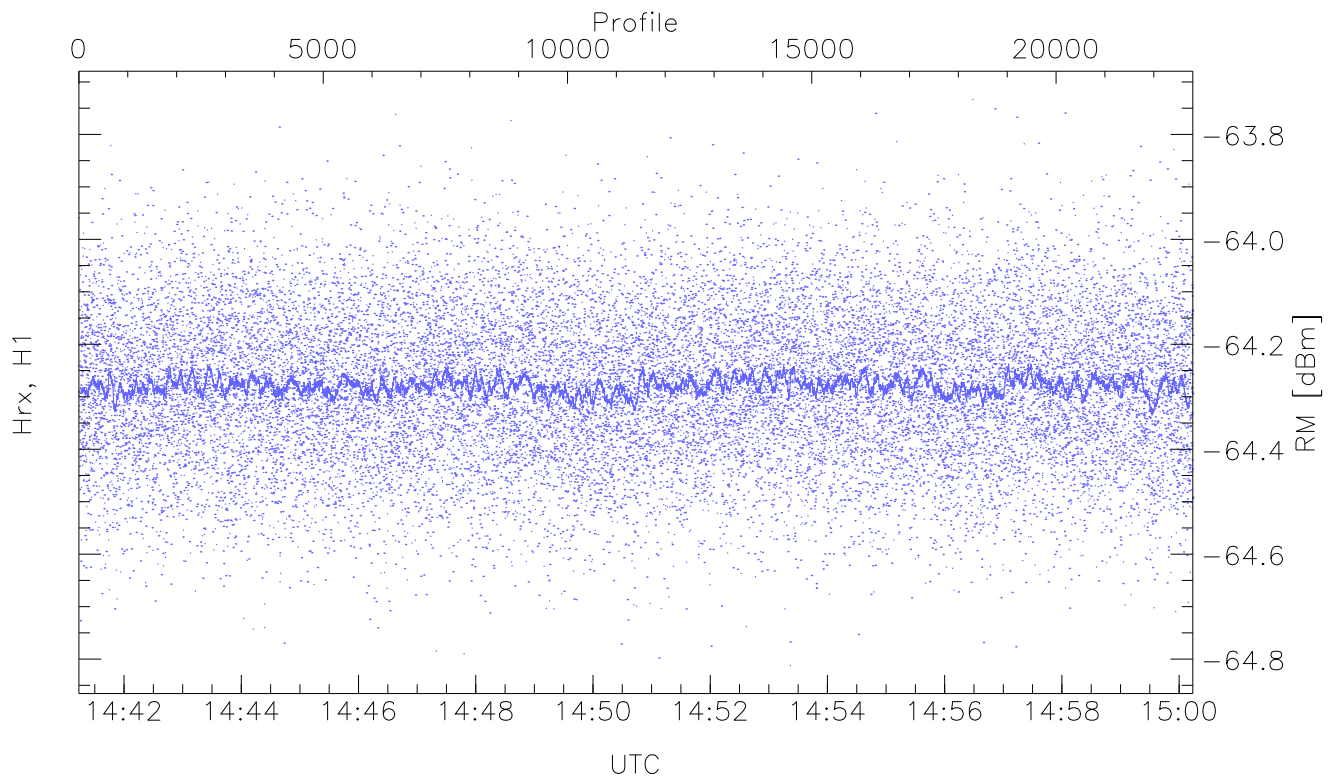


WCR2 CPP Receivers Noise Power from the Sky/RM Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(RM [dBm])	-64.81	-63.73	-64.28	-64.28	-79.17

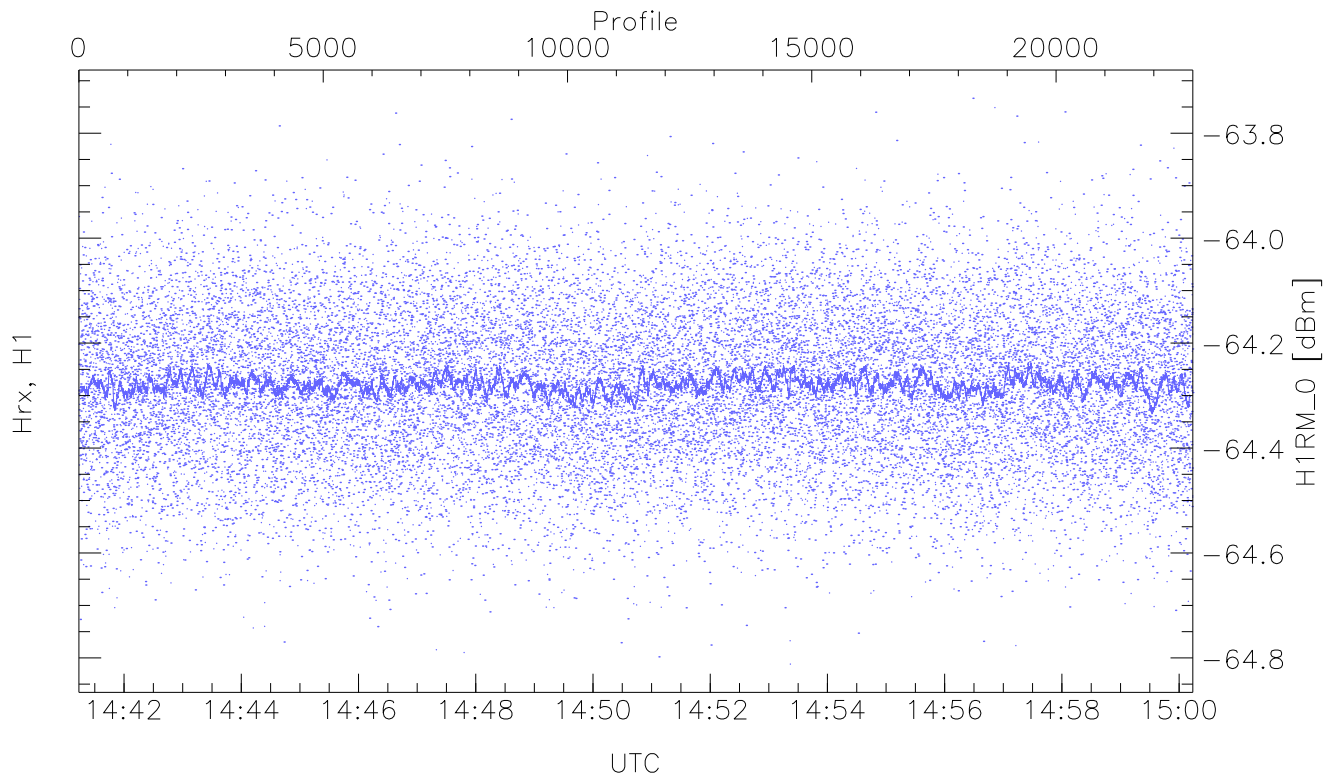


WCR2 CPP "Best" estimate Receivers Noise Power

	Min	Max	Mean	Median	StDev
H1RM_0 [dBm]	-64.81	-63.73	-64.28	-64.28	-79.17

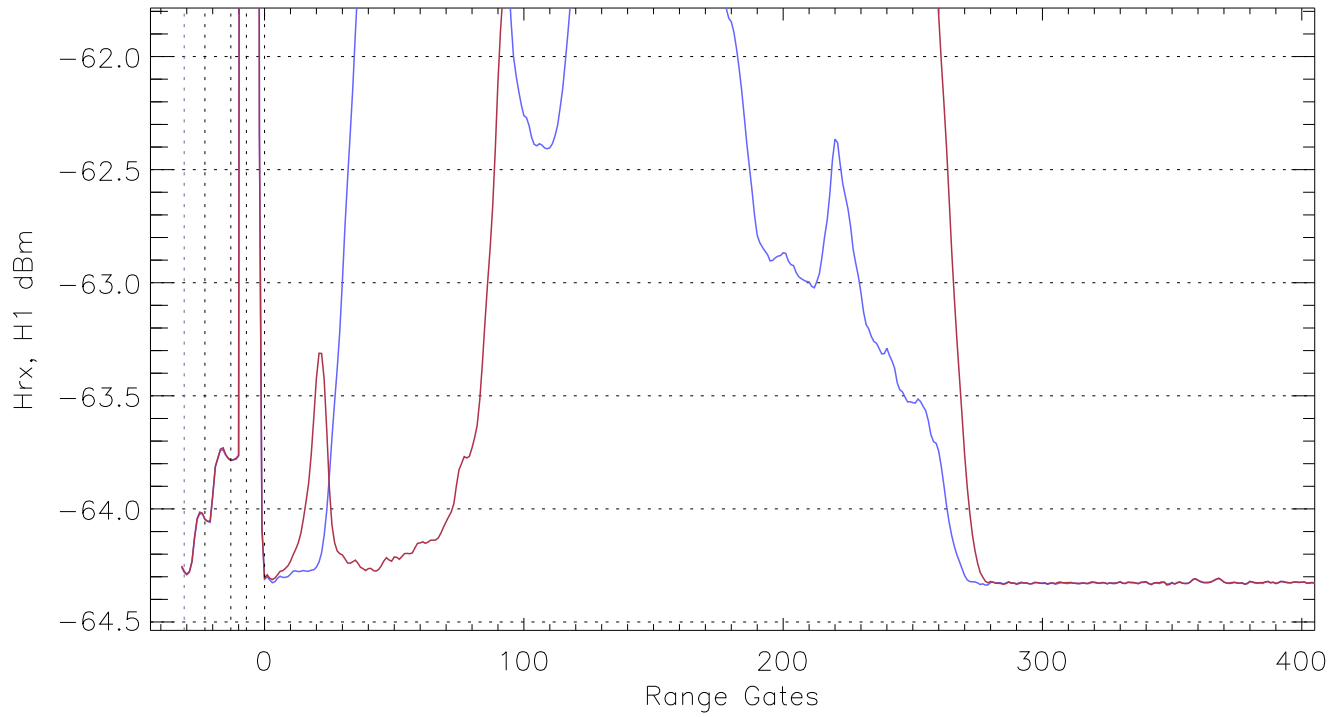


WCR2 CPP Averaged Received power for all recorded gates  
blue: 144114-145043, 11401 profiles averaged  
red: 145043-150014, 11400 profiles averaged



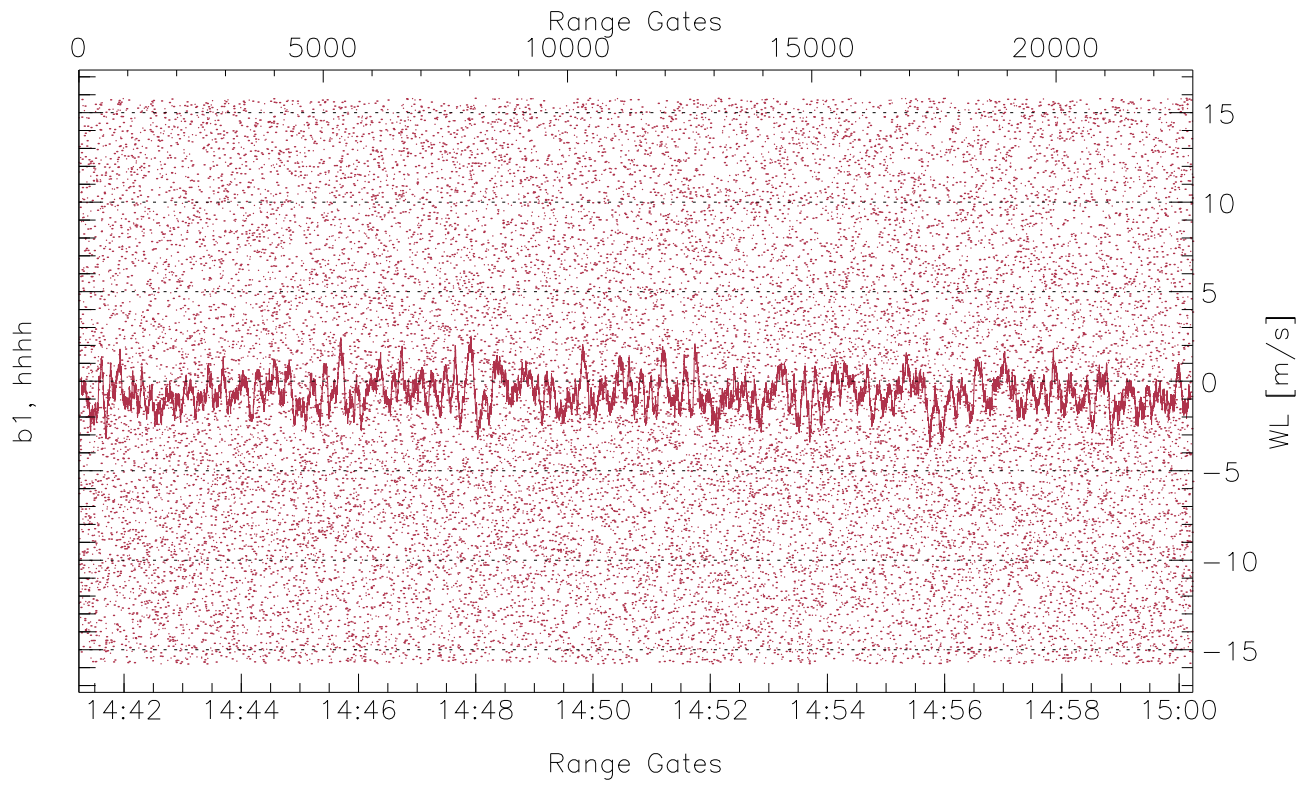


WCR2 CPP Receivers Phase Noise (in m/s) from the Warm Loads Measurements

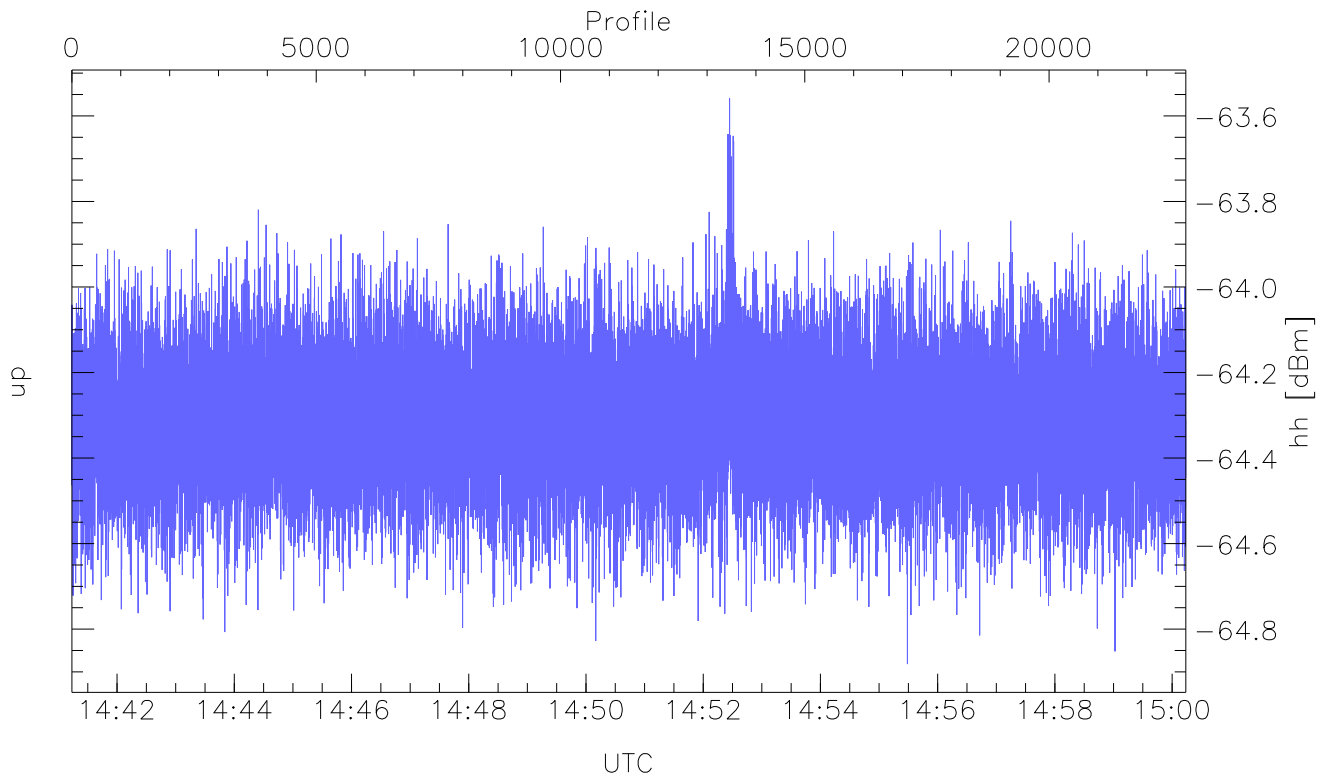

WCR2 CPP Received Power Products for Range gate 0 (105.1 m)

	Min	Max	Mean
up(hh [dBm])	-64.88	-63.56	-64.31

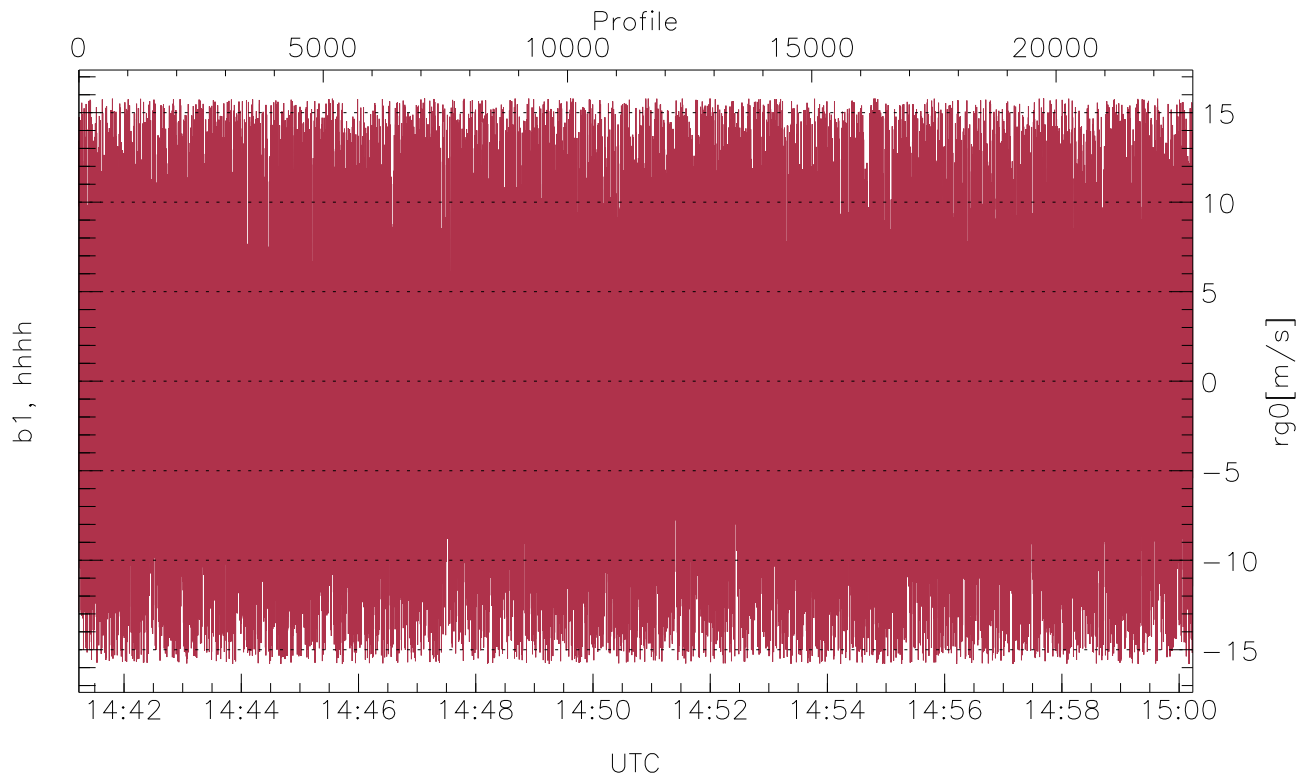

WCR2 CPP Doppler Velocity Products at 105.1 m range

	Min	Max	Mean	StDev
b1, hhhh(rg0[m/s])	-15.80	15.80	-0.69	8.66