




WCR2 CPP Tx Power Monitor, Profile Time Interval, HotLoad/WarmLoad Ratios


UTC: 16:05:47-16:11:15, Dur: 328.78s
TimeCor: 0.00s, TimeFlg: 1, TFPstatus constant
TimeInt/PPS(min,max,mn,std): 50.0,50.0,50.0,0.0 ms / 20,20,20
NumRec(r/t): 6575/6575, 0-6574/16:05:47-16:11:15
AcqTime: 50.0ms, Rate: 106KB/s, Averages: 500
Pulse: 250ns, IFF: 4.0MHz, Tx: H1 H1
PRF: 20.0 KHz, IGS: 50us
Range(min,max,rgs): 105,6187,15.0 m, Gates: 406, Aspect: 2.6

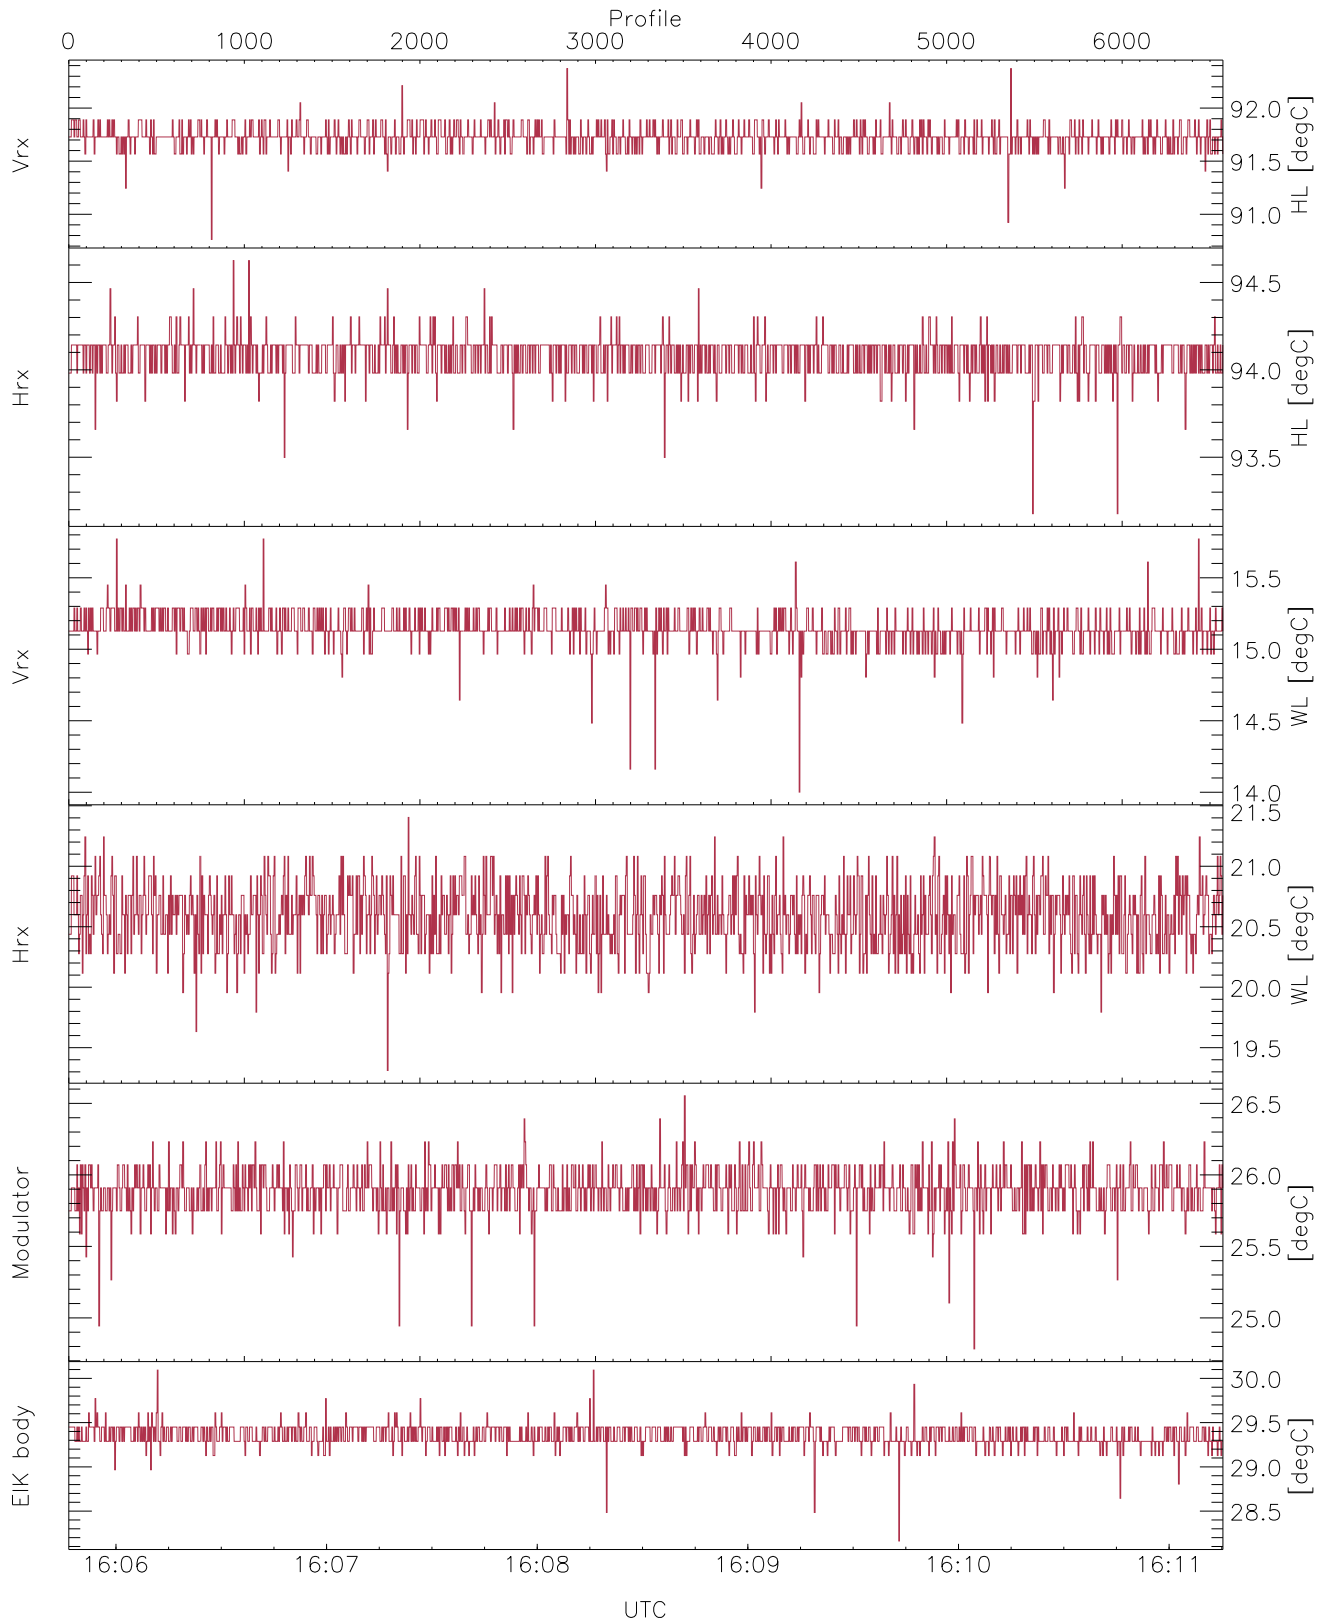

WCR2 CPP Temperature Monitor: Hot Loads, Warm Loads, Modulator Body, EIK Body


mintempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 90,93,14,19,24,28
maxtempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 92,94,15,21,26,30
LOalarm(20,80,240,2.8,14.8 MHz): 0,0,0,10,0
EIK/Modulator Faults: None

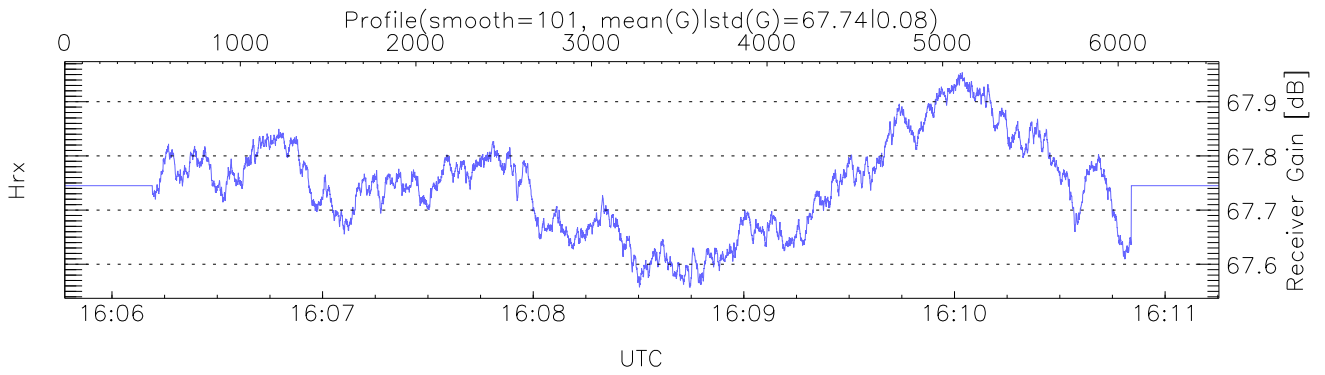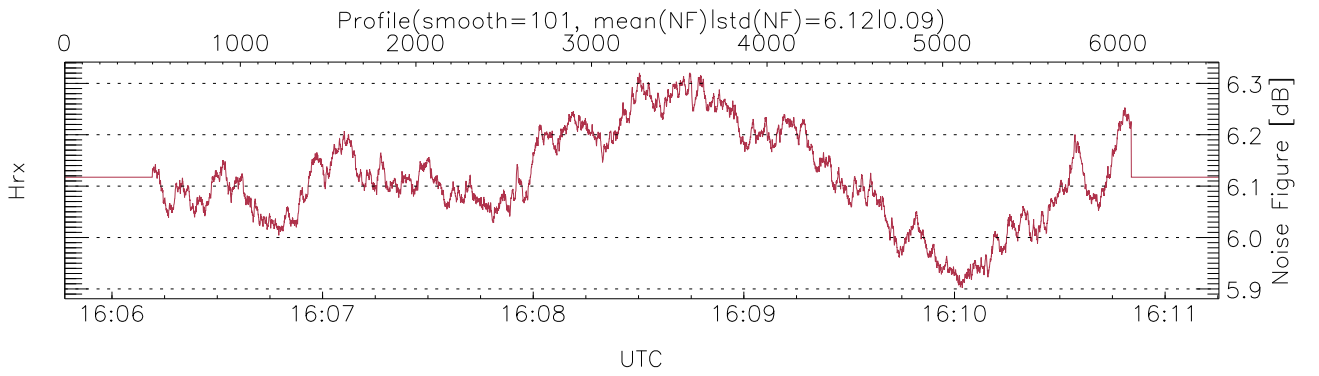

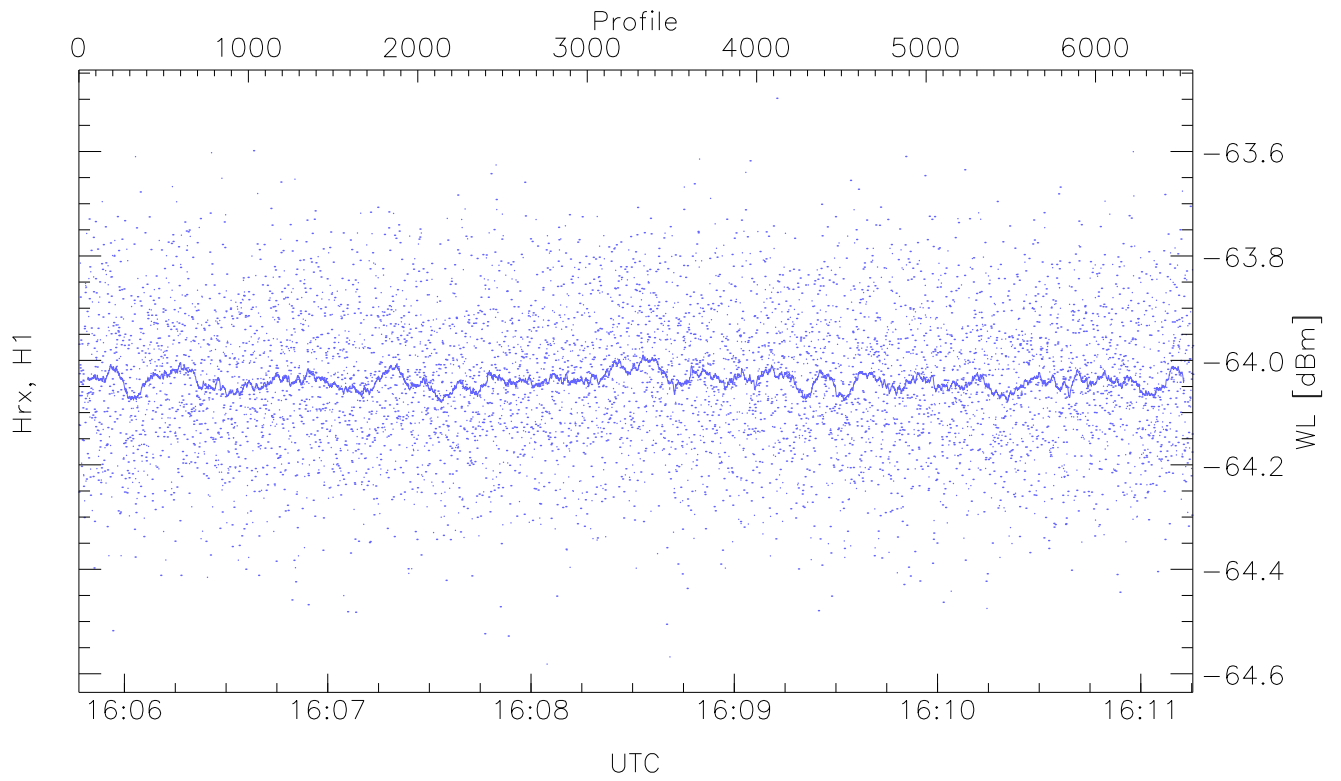


WCR2 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(WL [dBm])	-64.58	-63.50	-64.04	-64.04	-78.91

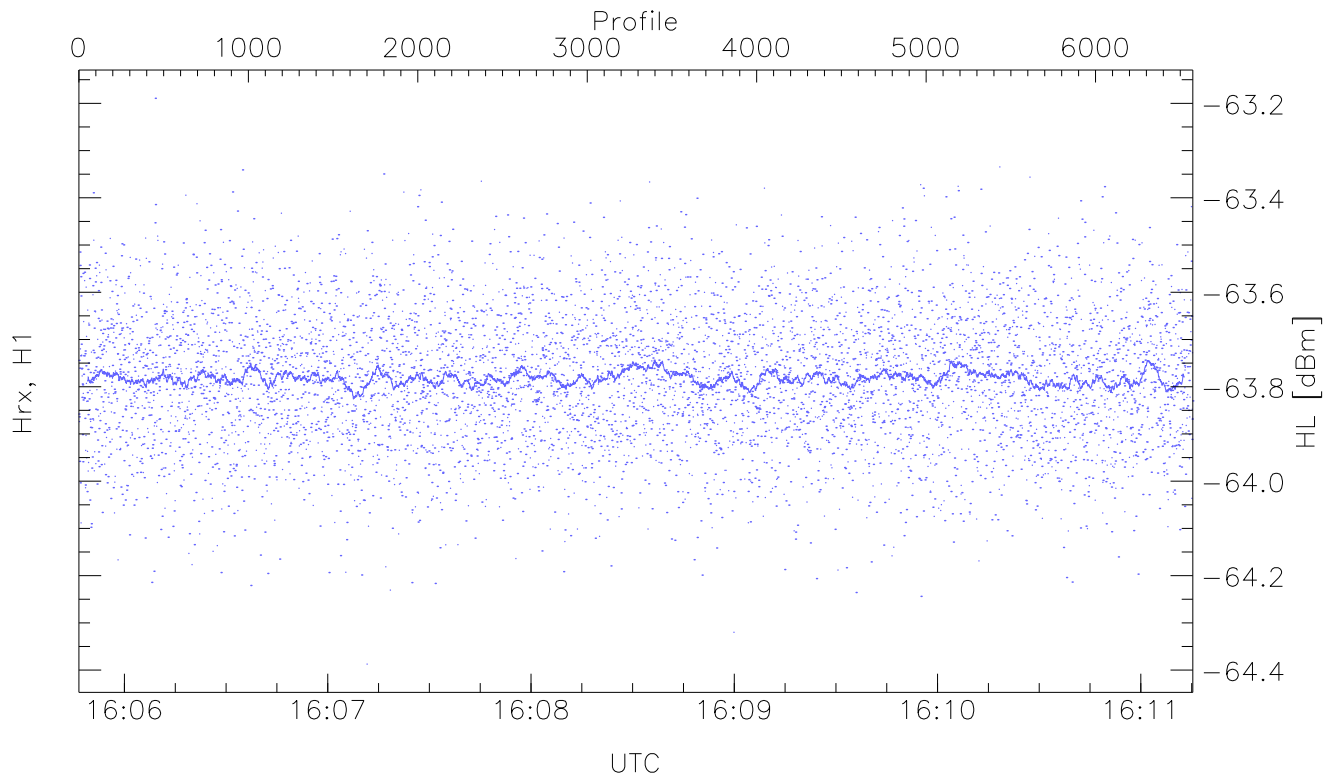


WCR2 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(HL [dBm])	-64.39	-63.19	-63.78	-63.78	-78.71

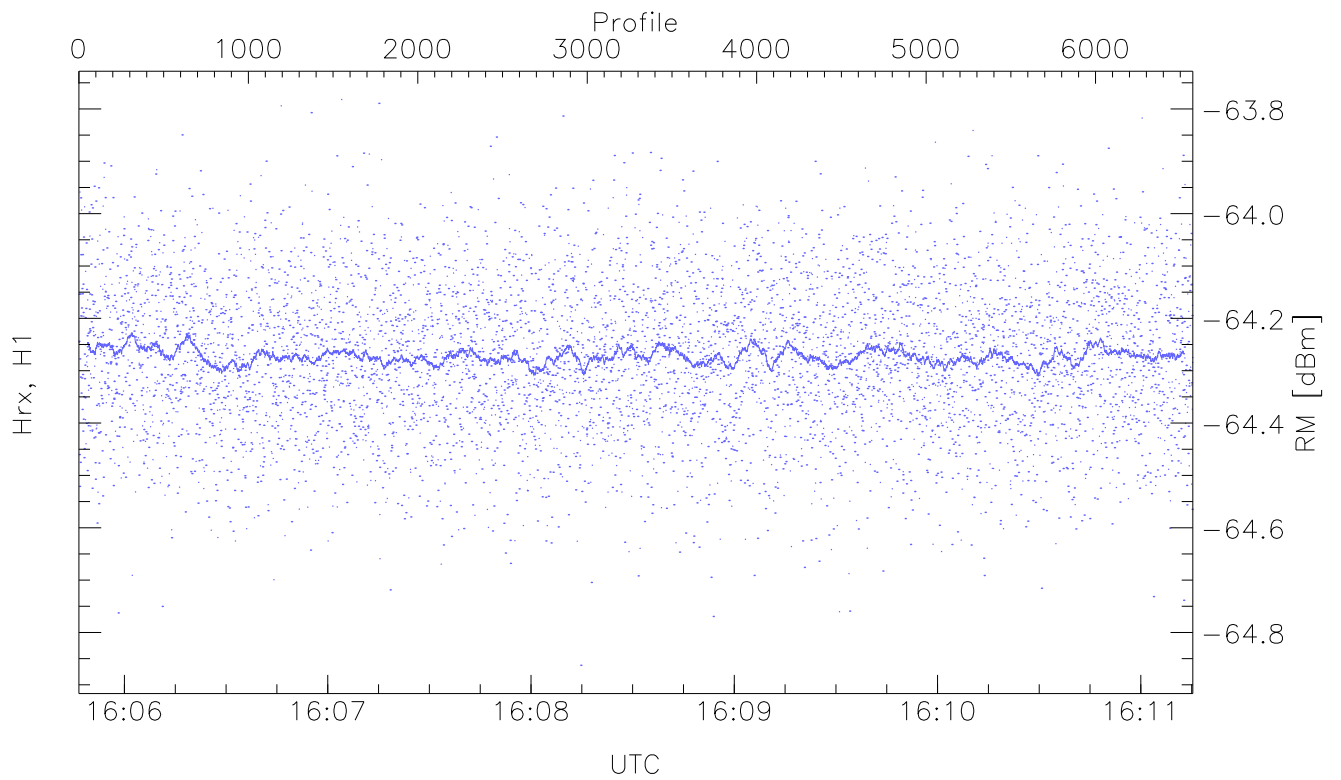


WCR2 CPP Receivers Noise Power from the Sky/RM Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(RM [dBm])	-64.86	-63.78	-64.27	-64.27	-79.13

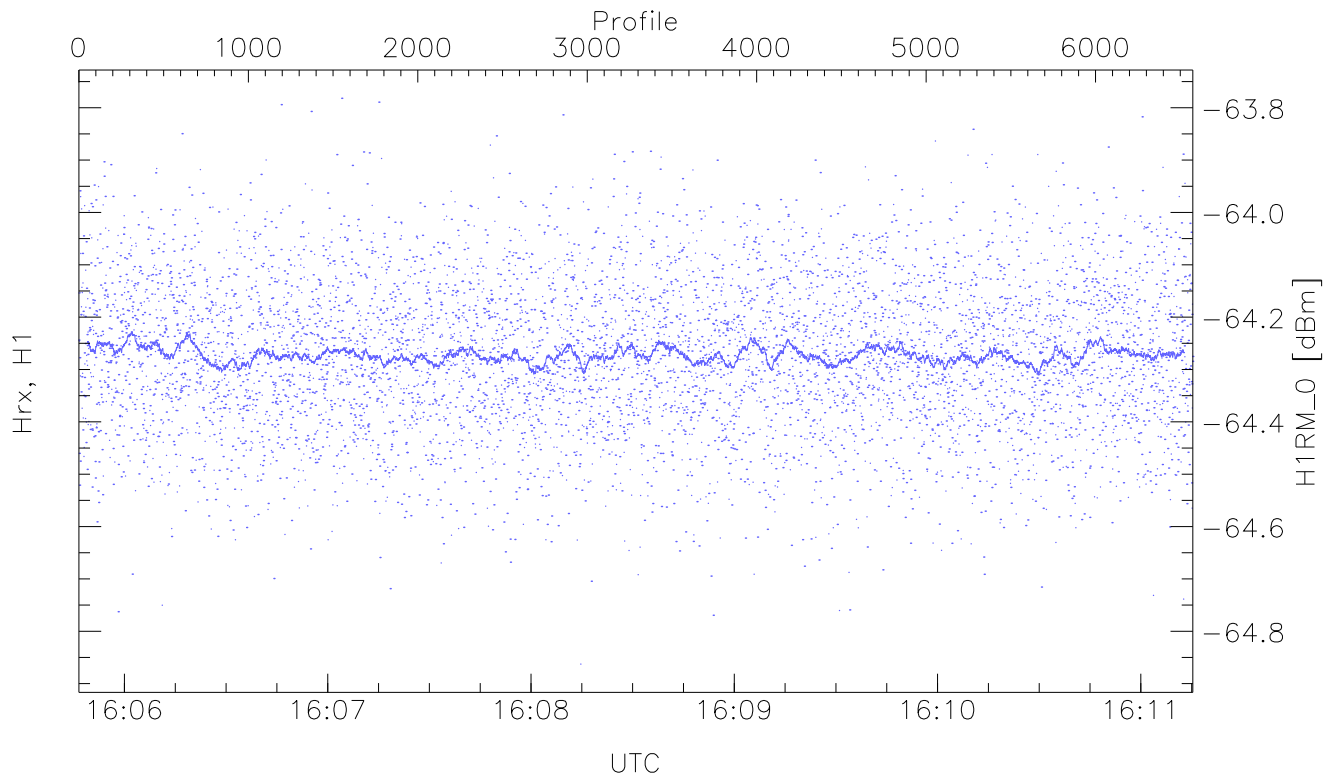


WCR2 CPP "Best" estimate Receivers Noise Power


H1RM_0 [dBm]	Min	Max	Mean	Median	StDev
	-64.86	-63.78	-64.27	-64.27	-79.13

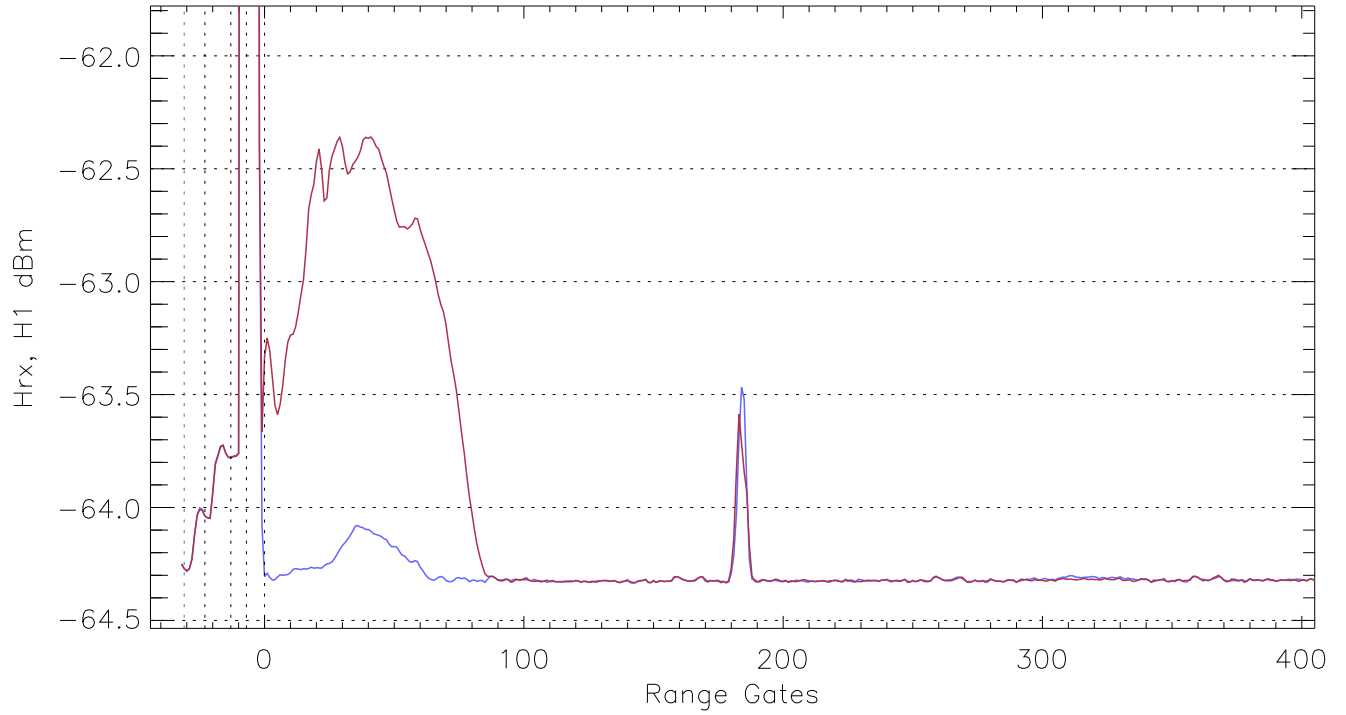

WCR2 CPP Averaged Received power for all recorded gates
blue: 160547-160830, 3288 profiles averaged
red: 160830-161115, 3288 profiles averaged

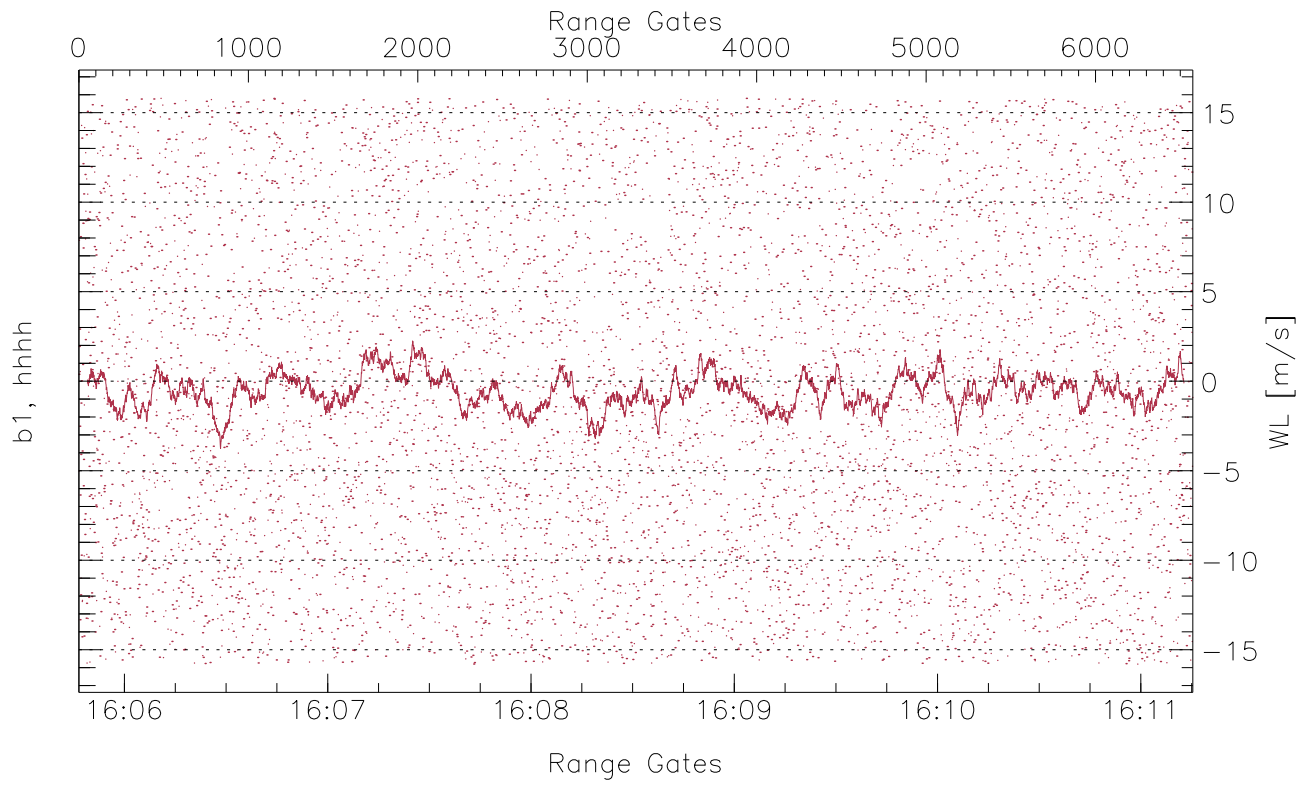


WCR2 CPP Receivers Phase Noise (in m/s) from the Warm Loads Measurements

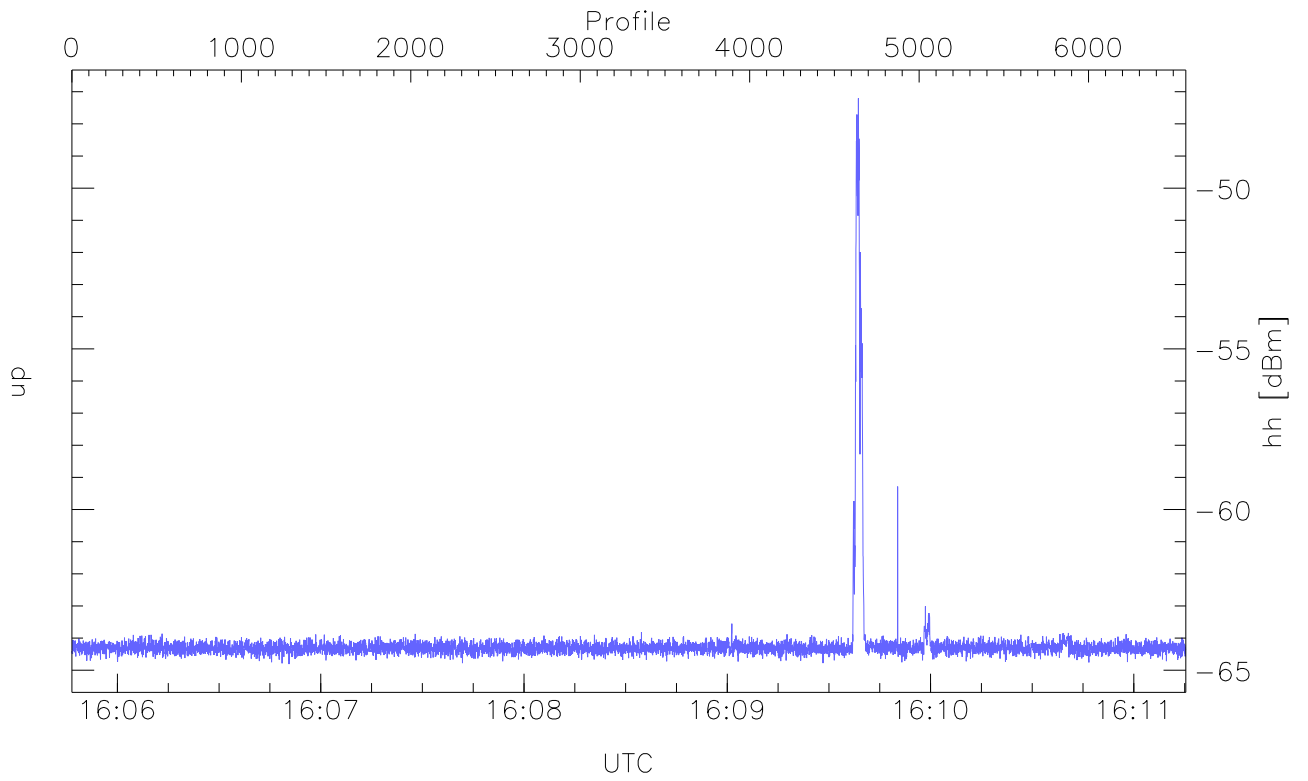

WCR2 CPP Received Power Products for Range gate 0 (105.1 m)

	Min	Max	Mean
up(hh [dBm])	-64.81	-47.20	-63.79

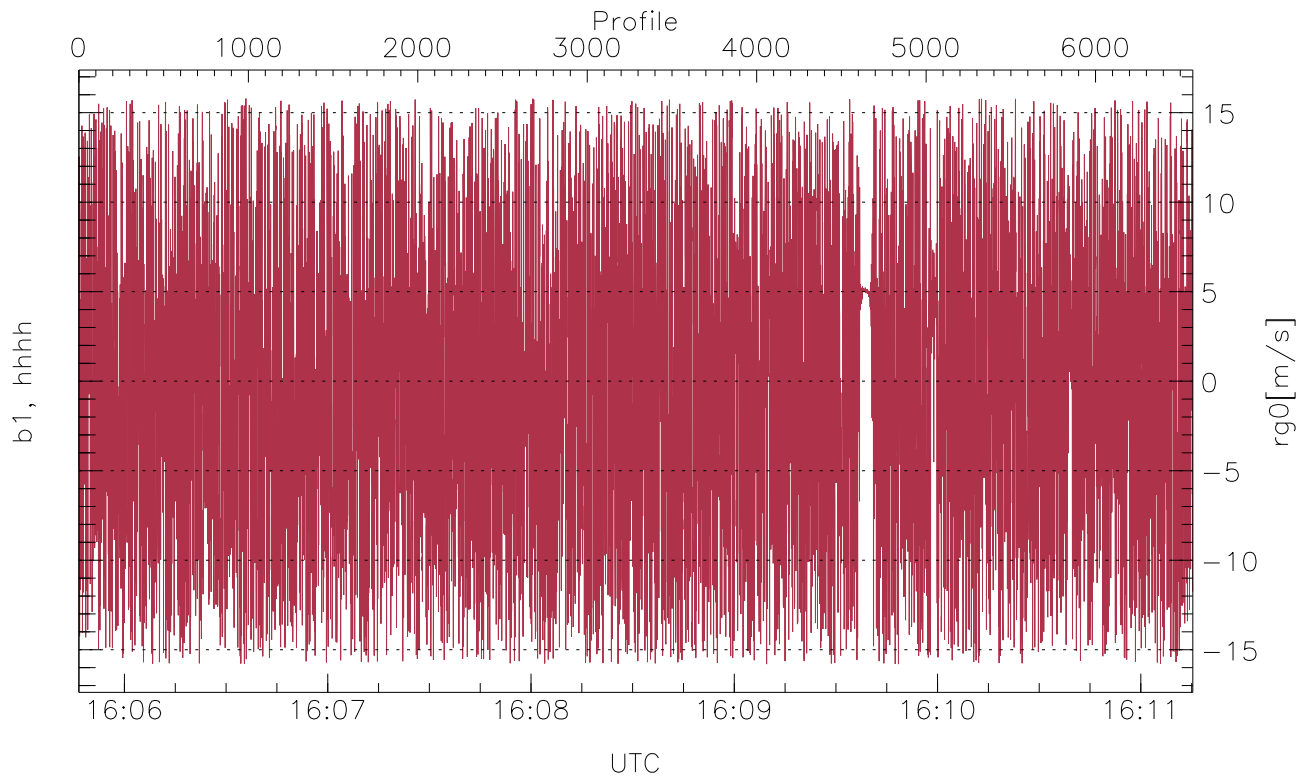

WCR2 CPP Doppler Velocity Products at 105.1 m range

	Min	Max	Mean	StDev
b1, hhhh(rg0[m/s])	-15.80	15.79	-0.67	8.55