



WCR3 CPP Tx Power Monitor, Profile Time Interval, HotLoad/WarmLoad Ratios

UTC: 13:08:59-13:20:50, TimeCor: 0.00s, Dur: 711.24s
 TimeFlg: 1, TFPstatus constant.
 TimeInt/PPS(min,max,mn,std): 60.0,60.0,60.0,0.0 ms / 16.7,16.7,16.7
 NumRec(r/t): 11852/11852, 0-11851/13:08:59-13:20:50
 AcqTime: 60.0ms, Rate: 0.123MB/s, Averages (req.,actual): 400,400
 Pulse: 250ns, IFF: 4.0MHz, Tx: H1 H1 H1
 PRF: 20.0 20.0 KHz, IGS: 50us
 Range(min,max,rqs): 105, 6288, 15.0 m, Gates: 413, Aspect: 2.8
 Mirror(-9|0|1|2,3,9x = no mirror|sidelup|error): 1

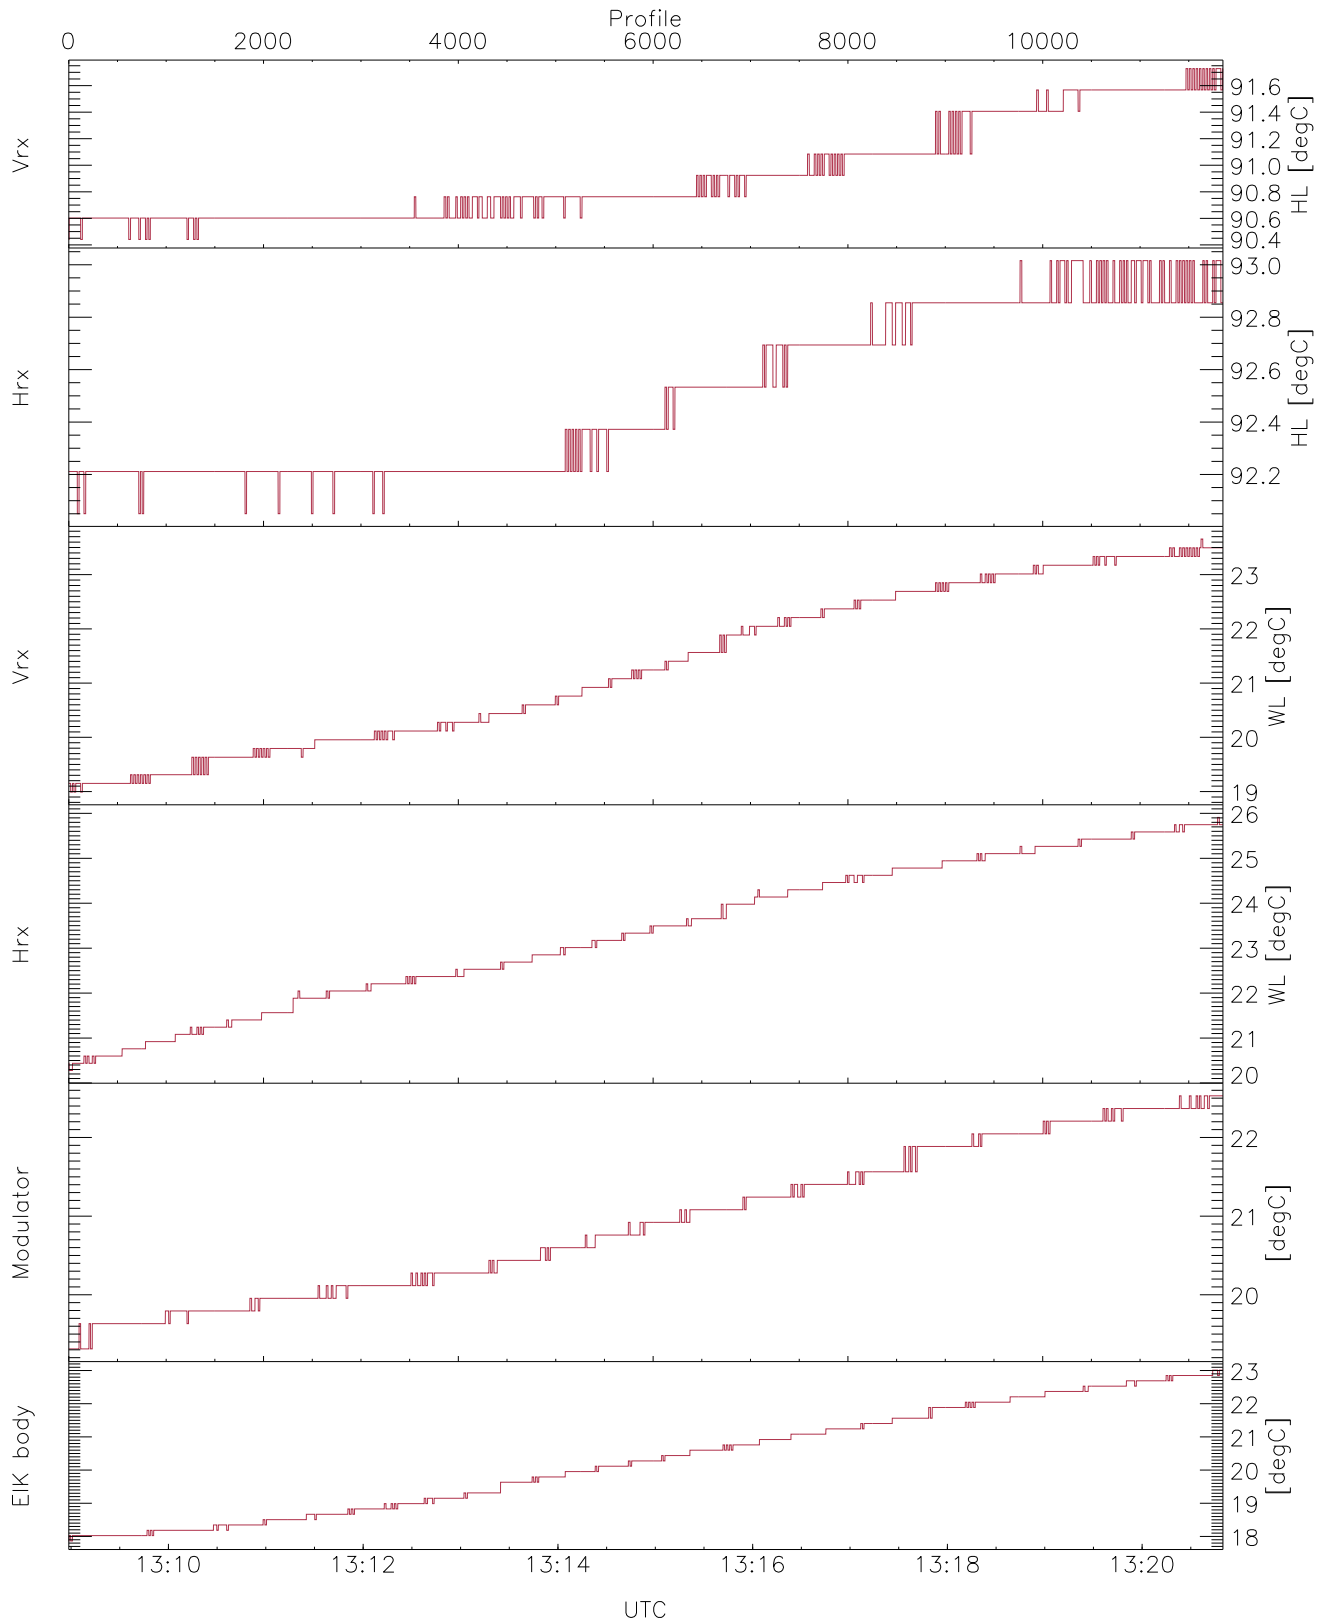


WCR3 CPP Temperature Monitor: Hot Loads, Warm Loads, Modulator, and EIK

mintempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 90,92,18,20,19,17
 maxtempC(VrxHL,HrxHL,VrxWL,HrxWL,Mod,EIK): 91,93,23,25,22,23
 LOalarm(20,240,2817,14861 MHz): 0,0,16,0
 EIK/Modulator Faults: None

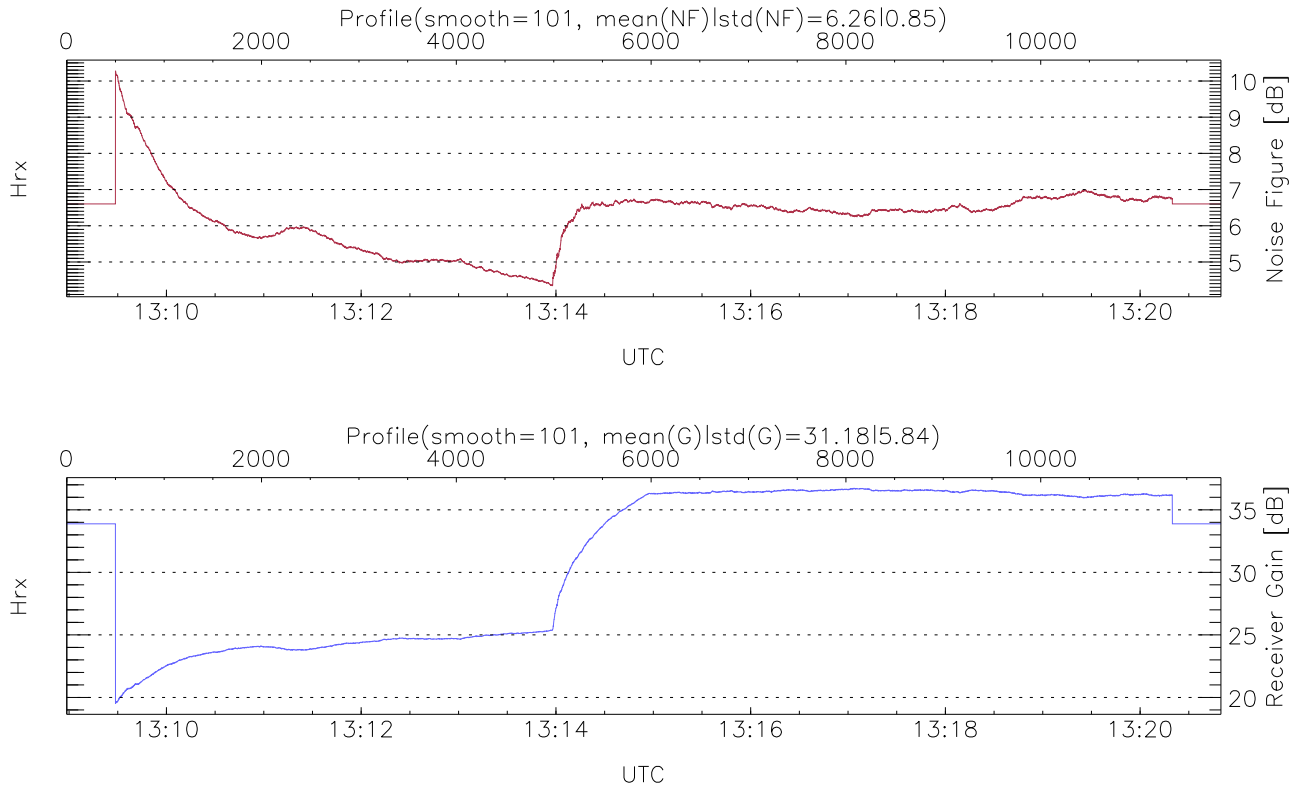


WCR3 CPP Receivers Gain and Noise Figure

Rx Saturation: 0 pixs, 0 gates, 0 profs, 0 prod(s)

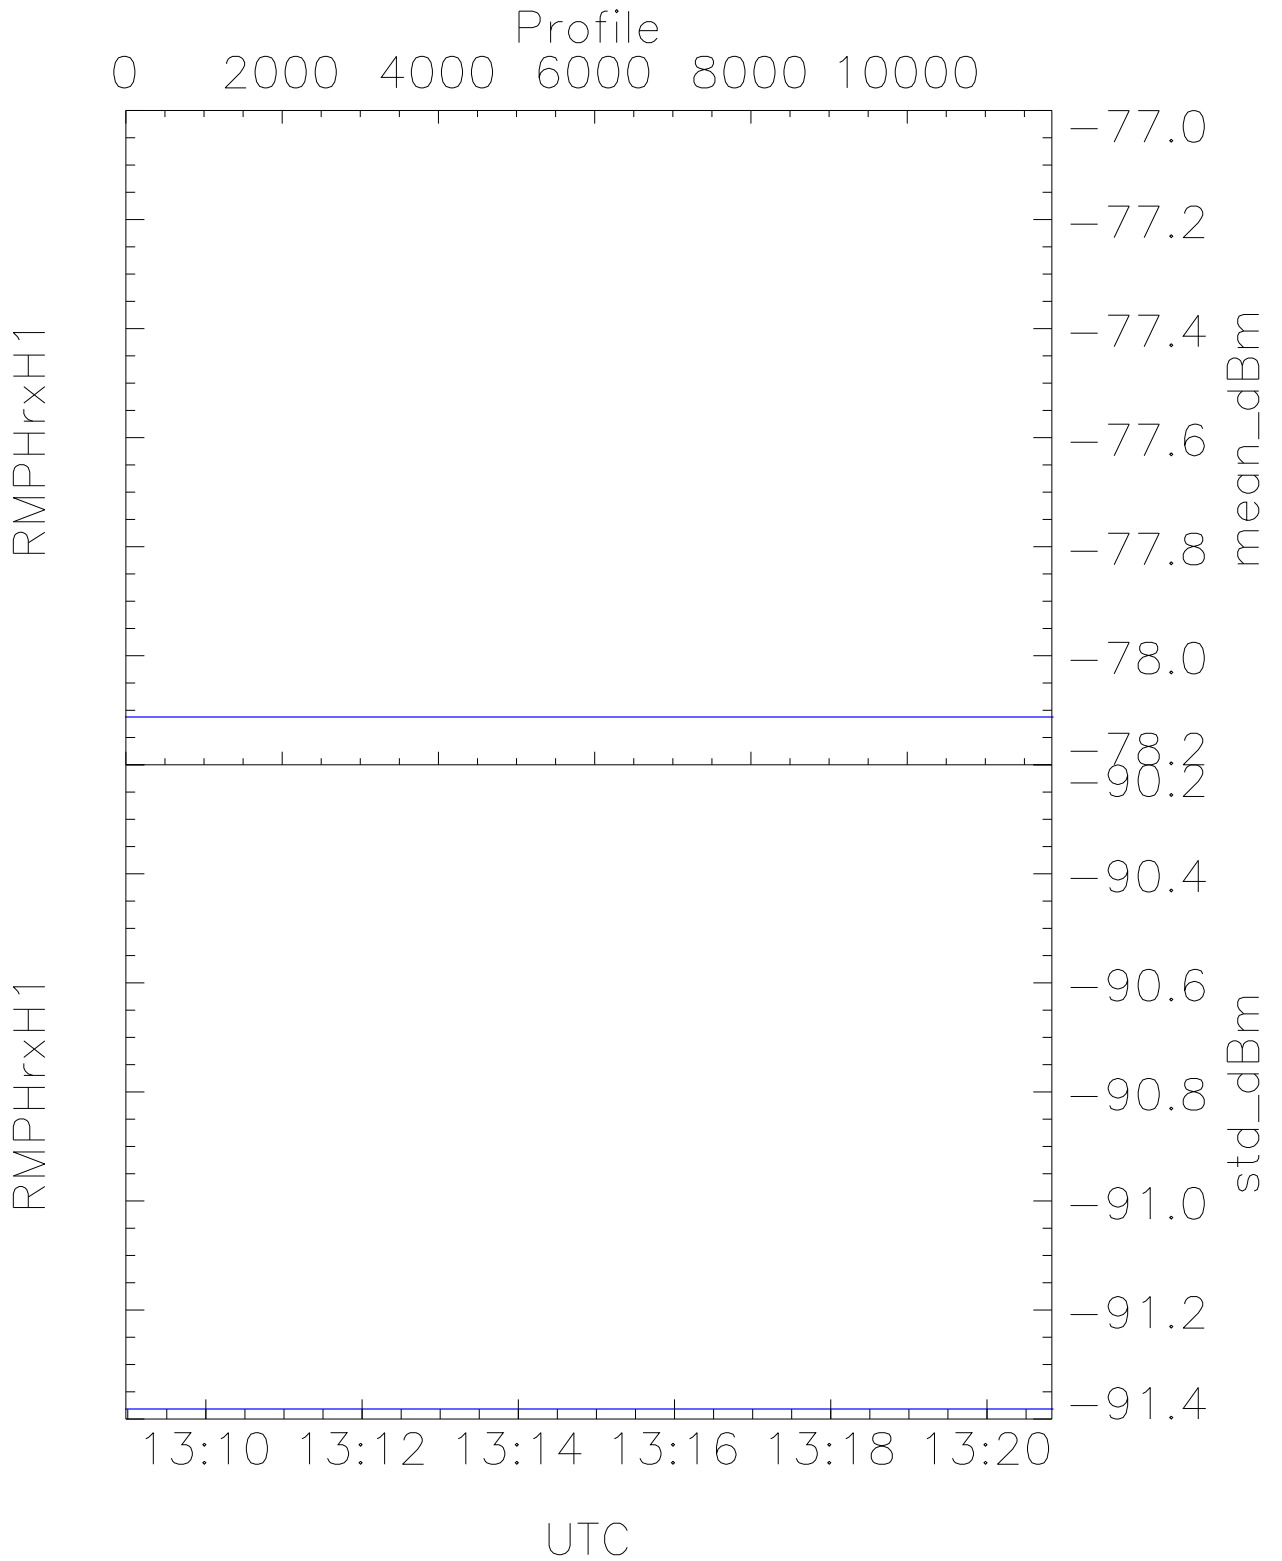


WCR3 CPP RM pulses(Tx is OFF) received power: Mean, StDev(all gates)

	Min	Max	Mean	Median	StDev
RMPHrxH1(mean_dBm)	-78.11	-78.11	-78.11	-78.11	-141.68
RMPHrxH1(std_dBm)	-91.38	-91.38	-91.38	-91.38	-154.18

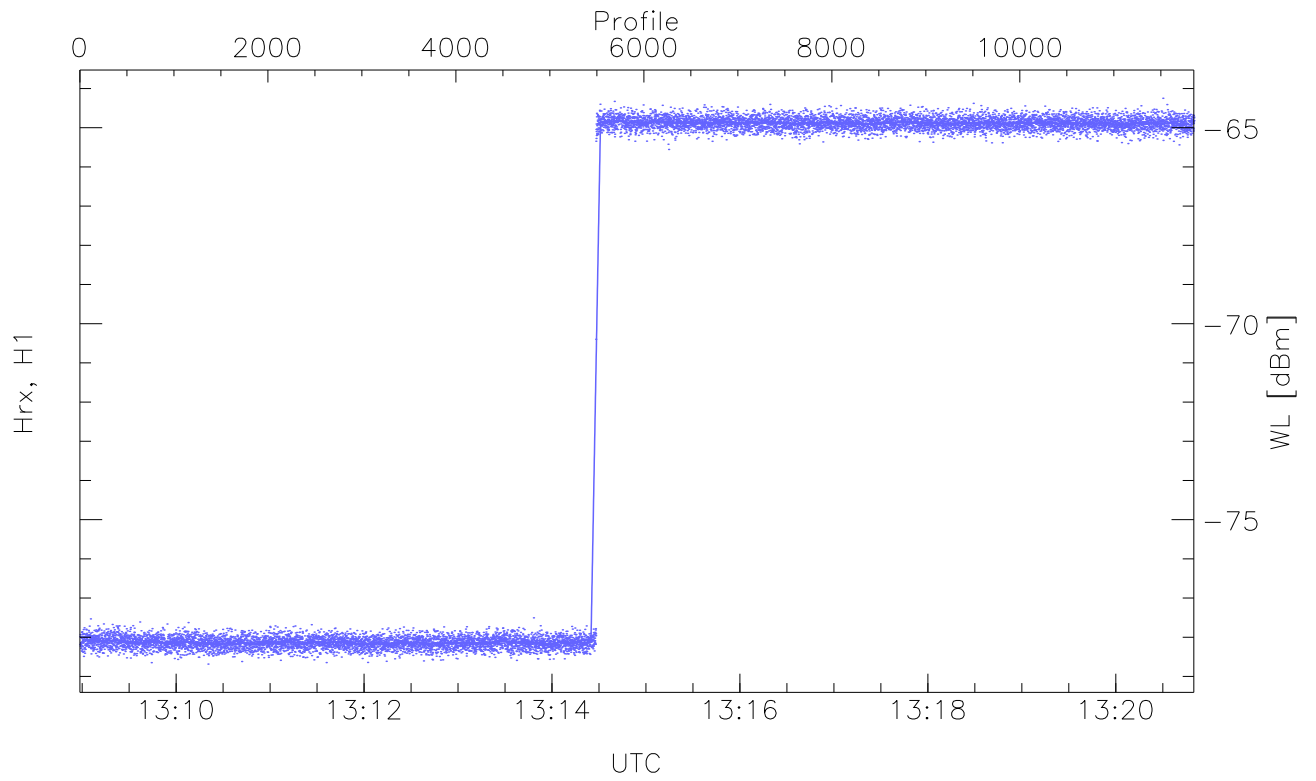


WCR3 CPP Receivers Noise Power from the Warm Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(WL [dBm])	-78.68	-64.25	-67.41	-65.11	-68.10

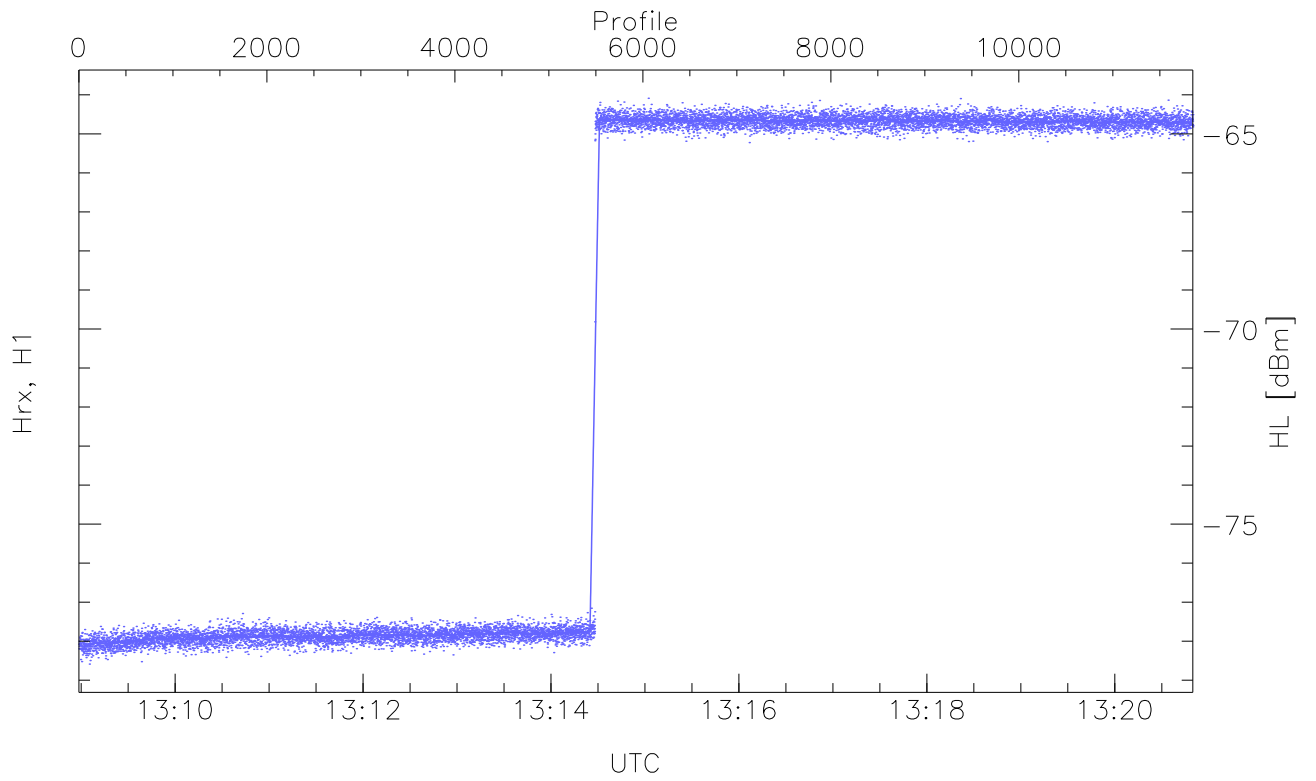


WCR3 CPP Receivers Noise Power from the Hot Loads Measurements

	Min	Max	Mean	Median	StDev
Hrx, H1(HL [dBm])	-78.59	-64.09	-67.19	-64.90	-67.89

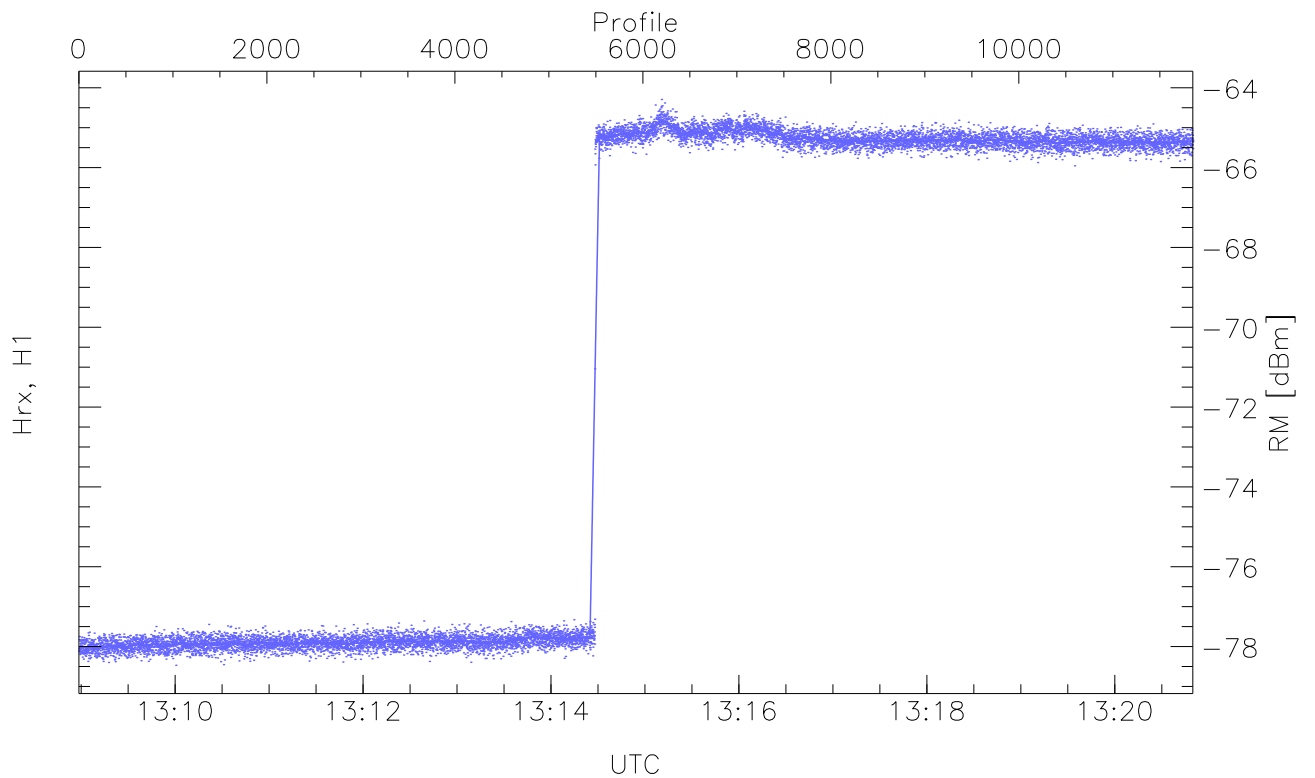


WCR3 CPP Receivers Noise Power from the Sky/RM Measurements

Hrx, H1(RM [dBm])	Min	Max	Mean	Median	StDev
	-78.47	-64.29	-67.76	-65.54	-68.51

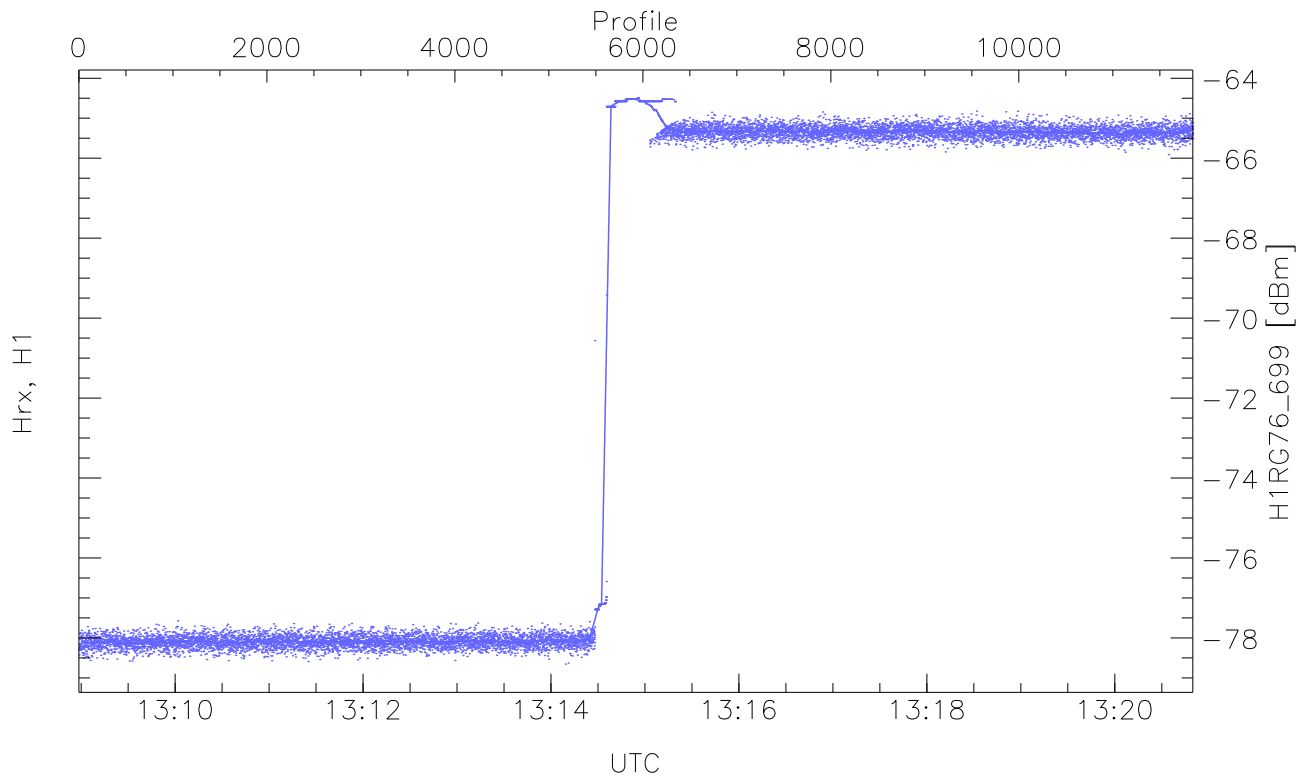


WCR3 CPP "Best" estimate Receivers Noise Power


	Min	Max	Mean	Median	StDev
H1RG76_699 [dBm]	-78.65	-64.50	-67.85	-65.59	-68.49

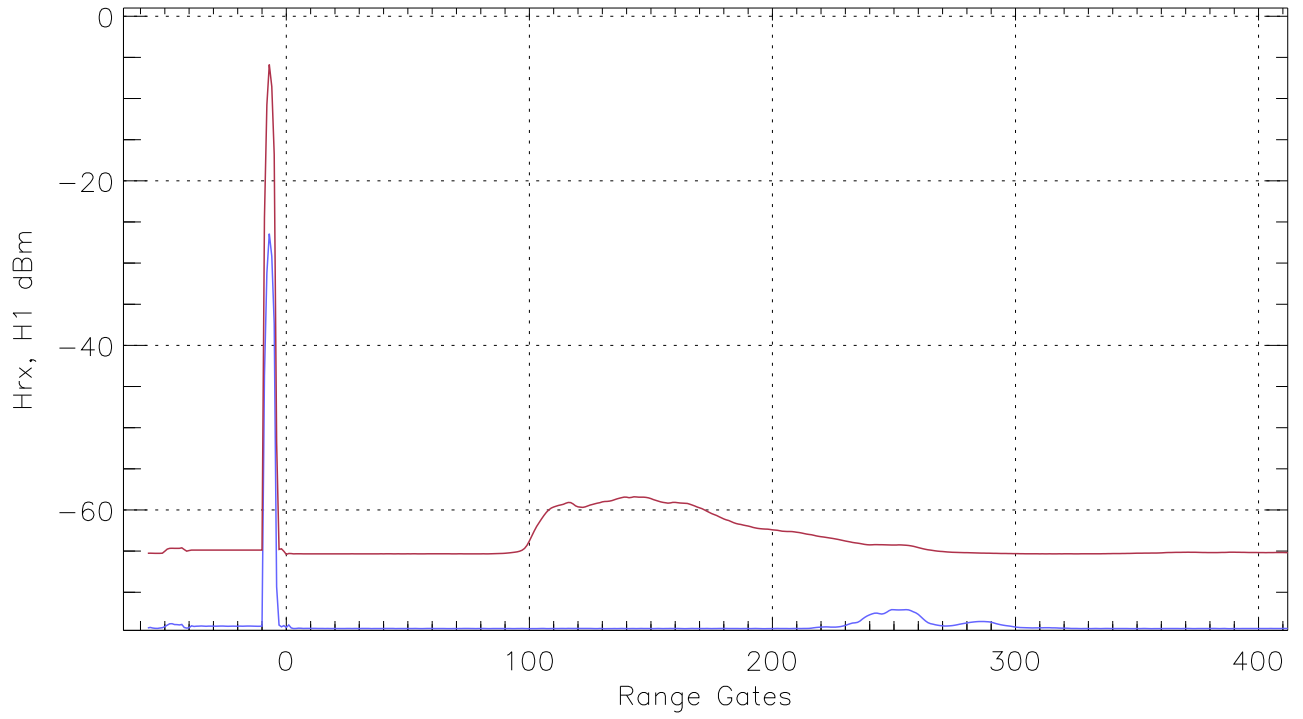


WCR3 CPP Averaged Received power for all recorded gates
blue: 130859-131454, 5927 profiles averaged
red: 131454-132050, 5926 profiles averaged

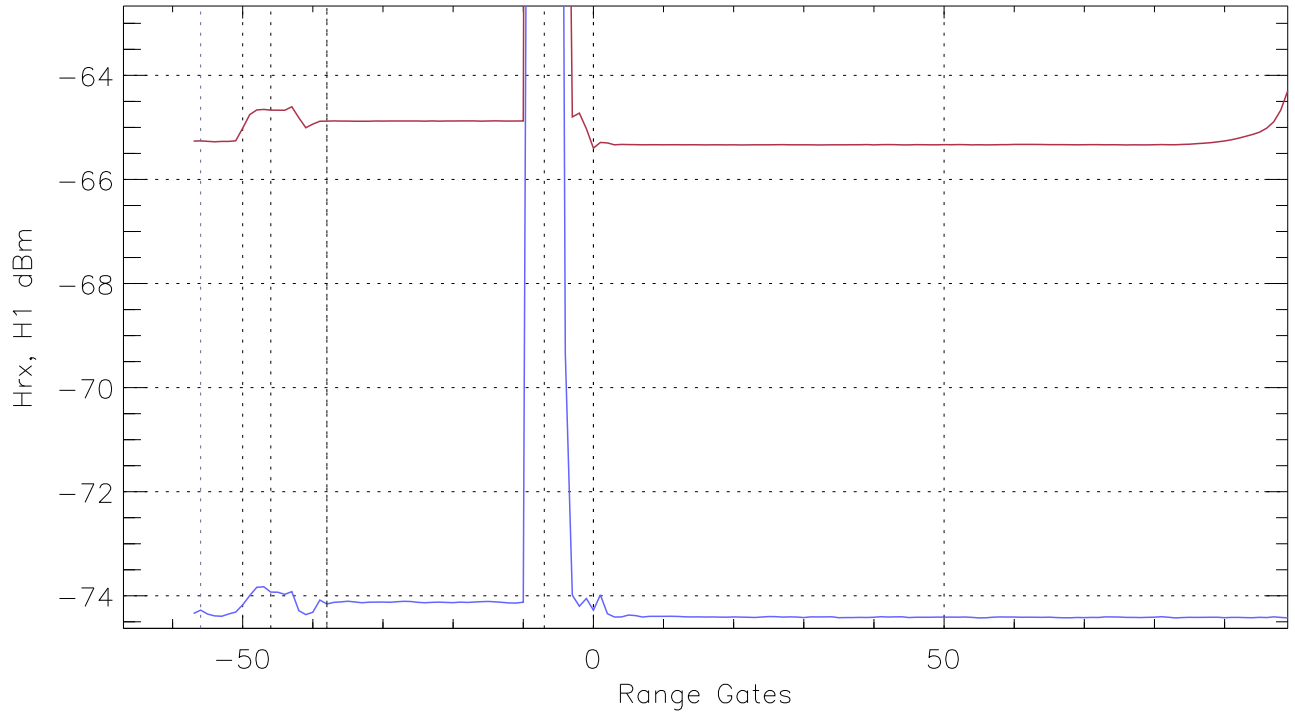

WCR3 CPP Averaged Power for neg. gates & up to 100 gates
blue: 130859-131454, 5927 profiles averaged
red: 131454-132050, 5926 profiles averaged

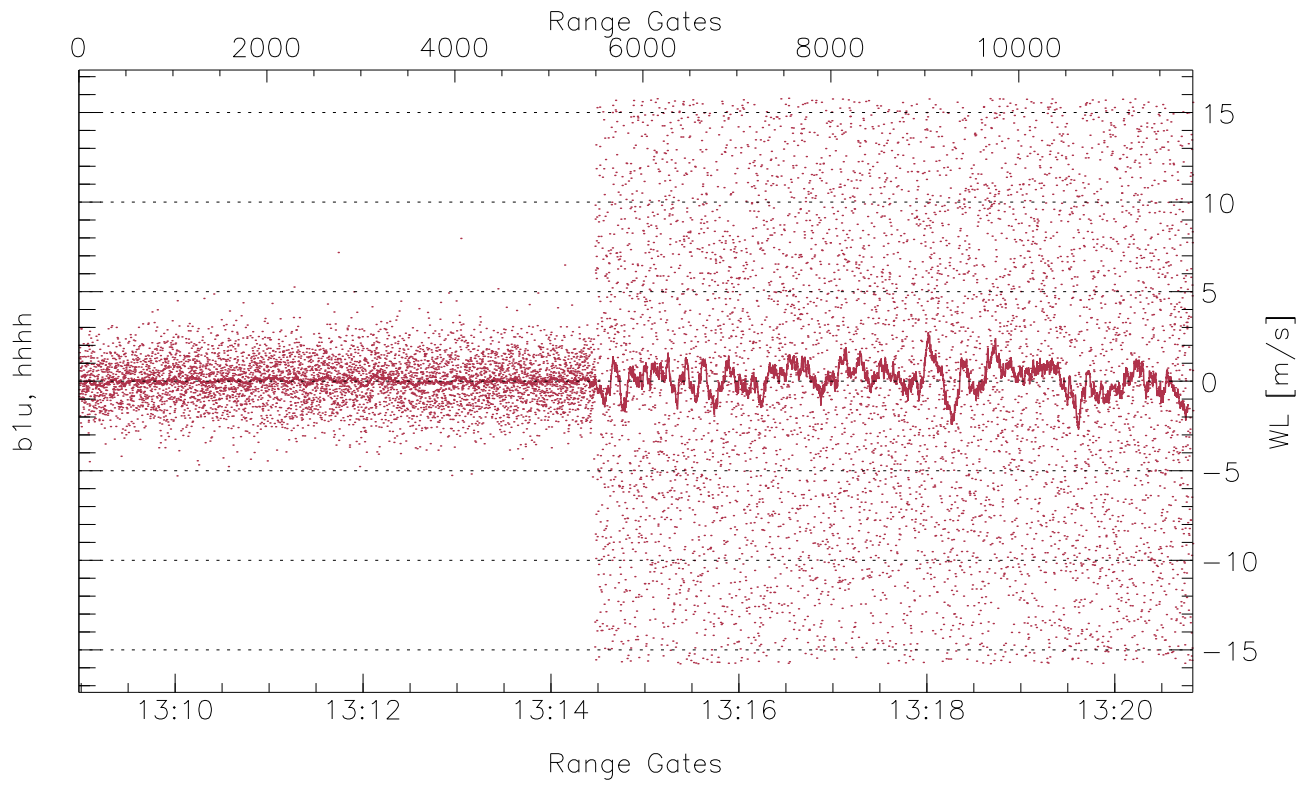


WCR3 CPP Receivers Phase Noise (in m/s) from the Warm Loads Measurements

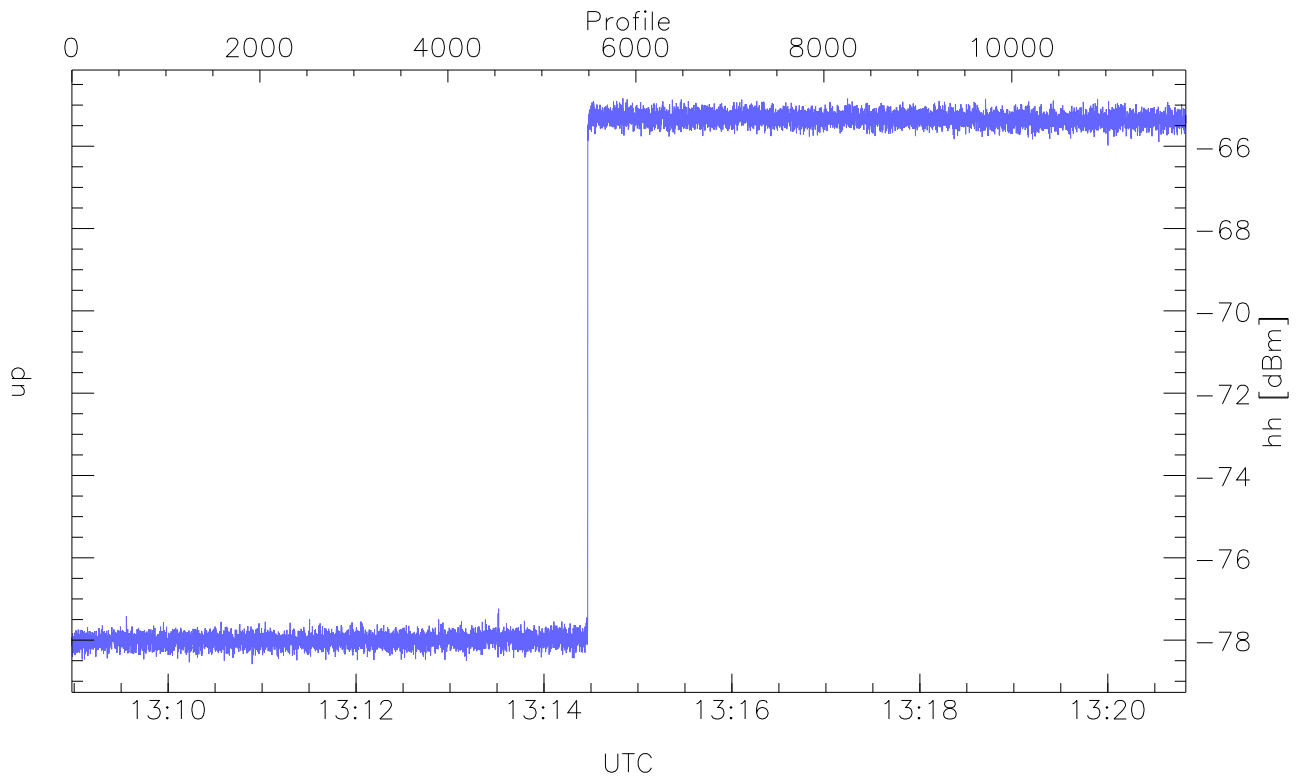

WCR3 CPP Received Power Products for Range gate 5 (180.4 m)

	Min	Max	Mean
up(hh [dBm])	-78.58	-64.84	-67.83

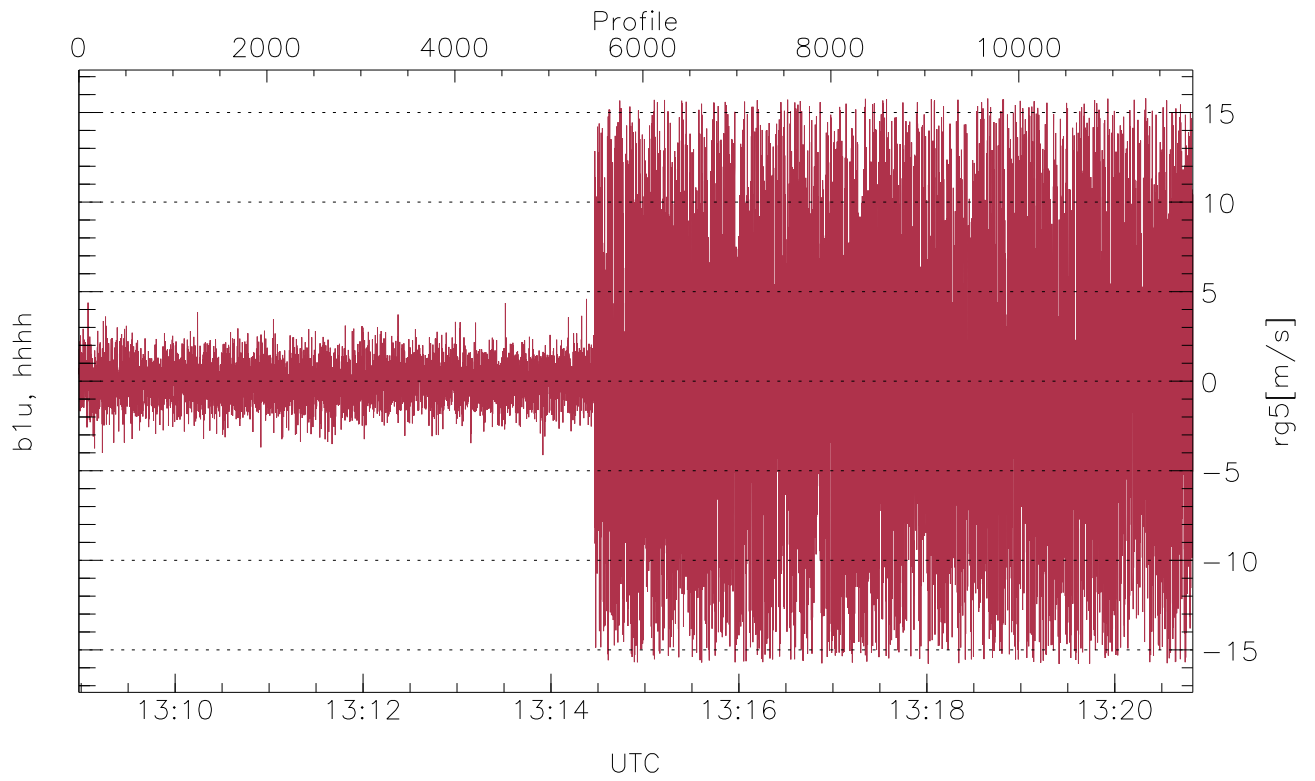

WCR3 CPP Doppler Velocity Products at 180.4 m range

	Min	Max	Mean	StDev
b1u, hhhh(rg5[m/s])	-15.79	15.79	-0.11	6.03